


AL 型-铝制单孔金属防水接头-M

Type AL -Aluminum cable gland-M

- 产品材料: 6062 铝, 密封件为 EPDM, 夹紧爪尼龙
- 防护等级: IP68
- 工作温度: $-40^{\circ} \sim 105^{\circ}$
- 阻燃等级: UL94V-2, 可定制 V0 级阻燃
- 订购说明: 默认不附螺母, 如需特殊说明

- Materials: 6062 aluminum, silica gel, nylon
- Waterproof: IP68
- Temperature: $-40^{\circ} \sim 105^{\circ}$
- fire prevention: UL94V-2, Customizable V0
- Ordering Information: Without nut

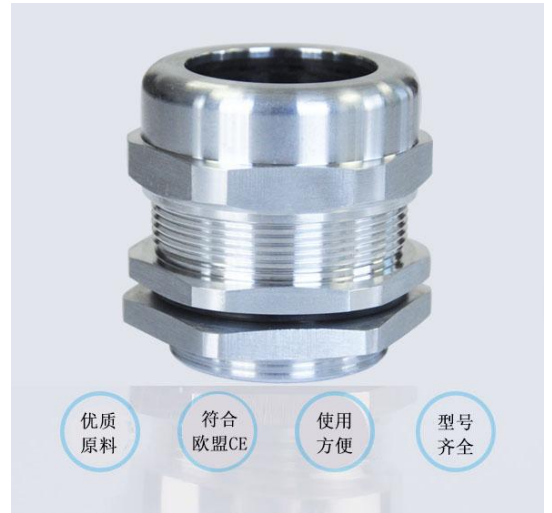


蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable range	Opening size	Thread length	Wrench Size	quantity
PN.	Metric	ϕ mm	AG mm	GL mm	nut/cap mm	Pcs/bag
MG12-08-AL	M12 \times 1.5	4~8	12.5	9	15/17	50
MG12-05-AL	M12 \times 1.5	3~5.5	12.5	9	15/17	50
MG14-08-AL	M14 \times 1.5	4~8	14.5	9	17/17	50
MG14-05-AL	M14 \times 1.5	3~5.5	14.5	9	17/17	50
MG16-10-AL	M16 \times 1.5	6~10	16.5	9.5	20/21	50
MG16-07-AL	M16 \times 1.5	4~7	16.5	9.5	20/21	50
MG20-14-AL	M20 \times 1.5	8~14	20.5	12	24/26	50
MG20S-12-AL	M20 \times 1.5	7~12	20.5	12	24/24	50
MG20S-11-AL	M20 \times 1.5	6~11	20.5	12	24/24	50
MG20S-09-AL	M20 \times 1.5	5~9	20.5	12	24/24	50
MG25-18-AL	M25 \times 1.5	13~18	25.5	12	30/31	50
MG25-16-AL	M25 \times 1.5	12~16	25.5	12	30/31	50
MG25-14-AL	M25 \times 1.5	8~14	25.5	12	30/31	50
MG25-10-AL	M25 \times 1.5	6~10	25.5	12	30/31	50
MG32-25-AL	M32 \times 1.5	18~25	32.5	12.5	38/40	20
MG32-22-AL	M32 \times 1.5	17~22	32.5	12.5	38/40	20
MG40-31-AL	M40 \times 1.5	25~31	40.5	14	48/50	10
MG40-25-AL	M40 \times 1.5	18~25	40.5	14	48/50	10
MG50-41-AL	M50 \times 1.5	33~41	50.5	15	58/60	10
MG50-33-AL	M50 \times 1.5	25~33	50.5	15	58/60	10
MG63-54-AL	M63 \times 1.5	46~54	63.5	15	71/76	1

AL 型-铝制单孔金属防水接头-G 和 NPT

Type SJ -Aluminum cable gland-G and NPT

- 产品材料: 6062 铝, 密封件为 EPDM, 夹紧爪尼龙
- 防护等级: IP68
- 工作温度: $-40^{\circ} \sim 105^{\circ}$
- 阻燃等级: UL94V-2, 可定制 V0 级阻燃
- 订购说明: 默认不附螺母, 如需特殊说明

- Materials: 6062 aluminum, silica gel, nylon
- Waterproof: IP68
- Temperature: $-40^{\circ} \sim 105^{\circ}$
- fire prevention: UL94V-2, Customizable V0
- Ordering Information: Without nut

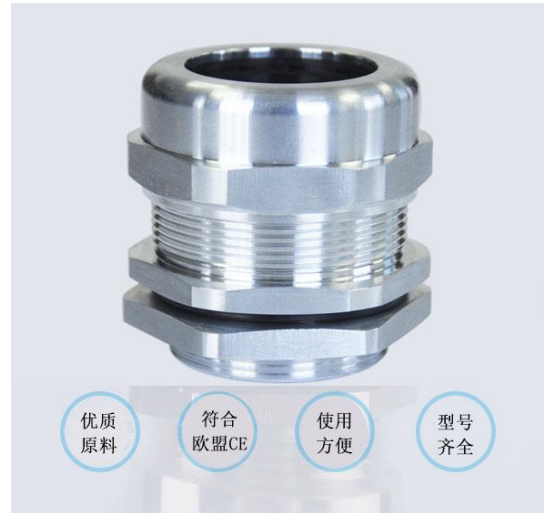

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable range	Opening size	Thread length	Wrench Size	quantity
PN.	G (PF)	mm	mm	mm	nut/cap mm	Pcs/bag
G1/4-08-AL	G1/4	4~8	13.5	9	17/17	50
G3/8-10-AL	G3/8	6~10	16.6	9.5	21/21	50
G1/2-12-AL	G1/2	7~12	21	12	24/24	50
G3/4-18-AL	G3/4	13~18	26.6	12	30/31	50
G1-25-AL	G1	18~25	33.5	15	38/40	20
G1-1/4-31-AL	G1-1/4	25~31	42	15	48/50	10
G1-1/2-31-AL	G1-1/2	25~31	48	15	55/50	10
G2-44-AL	G2	36~44	60	15	71/65	1
NPT1/4-08-AL	NPT1/4	4~8	13.5	9	17/17	50
NPT3/8-10-AL	NPT3/8	6~10	16.6	10	21/21	50
NPT1/2-12-AL	NPT1/2	7~12	21	11	24/24	50
NPT3/4-18-AL	NPT3/4	13~18	26.6	13	30/31	50
NPT1-25-AL	NPT1	18~25	33.5	15	38/40	20
NPT1-1/4-31-AL	NPT1-1/4	25~31	42	15	48/50	10
NPT1-1/2-31-AL	NPT1-1/2	25~31	48	15	55/50	10
NPT2-44-AL	NPT2	36~44	60	15	71/65	1

AL 型-EMC 铝制屏蔽金属防水接头

Type SJ -Aluminum cable gland-G and NPT

- 产品材料: 6062 铝, 密封件为 EPDM, 夹紧爪尼龙
- 防护等级: IP68
- 工作温度: $-40^{\circ} \sim 105^{\circ}$
- 阻燃等级: UL94V-2, 可定制 V0 级阻燃
- 订购说明: 默认不附螺母, 如需特殊说明

- Materials: 6062 aluminum, silica gel, nylon
- Waterproof: IP68
- Temperature: $-40^{\circ} \sim 105^{\circ}$
- fire prevention: UL94V-2, Customizable V0
- Ordering Information: Without nut




蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable range	Opening size	Thread length	Wrench Size	quantity
PN.	Metric	ϕ mm	AG mm	GL mm	nut/cap mm	Pcs/bag
EMC-MG12-08-AL	M12 \times 1.5	4~8	12.5	9	15/17	50
EMC-MG14-08-AL	M14 \times 1.5	4~8	14.5	9	17/17	50
EMC-MG16-10-AL	M16 \times 1.5	6~10	16.5	9.5	20/21	50
EMC-MG20-14-AL	M20 \times 1.5	8~14	20.5	12	24/26	50
EMC-MG20S-12-AL	M20 \times 1.5	7~12	20.5	12	24/24	50
EMC-MG25-18-AL	M25 \times 1.5	13~18	25.5	12	30/31	50
EMC-MG32-25-AL	M32 \times 1.5	18~25	32.5	12.5	38/40	20
EMC-MG40-31-AL	M40 \times 1.5	25~31	40.5	14	48/50	10
EMC-MG50-41-AL	M50 \times 1.5	33~41	50.5	15	58/60	10
EMC-MG63-44-AL	M63 \times 1.5	36~44	63.5	15	71/65	1
EMC-G1/4-08-AL	G1/4	4~8	13.5	9	17/17	50
EMC-G3/8-10-AL	G3/8	6~10	16.6	9.5	21/21	50
EMC-G1/2-12-AL	G1/2	7~12	21	12	24/24	50
EMC-G3/4-18-AL	G3/4	13~18	26.6	12	30/31	50
EMC-G1-25-AL	G1	18~25	33.5	15	38/40	20
EMC-G1-1/4-31-AL	G1-1/4	25~31	42	15	48/50	10
EMC-G1-1/2-31-AL	G1-1/2	25~31	48	15	55/50	10
EMC-G2-44-AL	G2	36~44	60	15	71/65	1

AL 型-铝制扁孔金属防水接头

Type SJ -Aluminum cable gland-G and NPT

- 产品材料: 6062 铝, 密封件为 EPDM, 夹紧爪尼龙
- 防护等级: IP68
- 工作温度: $-40^{\circ} \sim 105^{\circ}$
- 阻燃等级: UL94V-2, 可定制 V0 级阻燃
- 订购说明: 默认不附螺母, 如需特殊说明

- Materials: 6062 aluminum, silica gel, nylon
- Waterproof: IP68
- Temperature: $-40^{\circ} \sim 105^{\circ}$
- fire prevention: UL94V-2, Customizable V0
- Ordering Information: Without nut

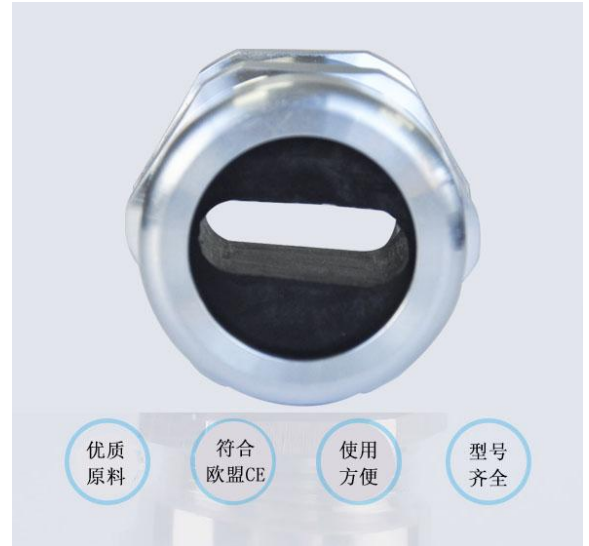

蓝江产品型号	螺纹规格	扁线尺寸	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable size	Opening size	Thread length	Wrench Size	quantity
PN.	Metric	H&W mm	AG mm	GL mm	nut/cap mm	Pcs/bag
MG20-0410-AL	M20×1.5	4*10	20.5	12	24/26	50
MG20-0814-AL	M20×1.5	8*14	20.5	12	24/26	50
MG20S-0508-AL	M20×1.5	5*8	20.5	12	24/24	50
MG20S-0712-AL	M20×1.5	7*12	20.5	12	24/24	50
MG25-0614-AL	M25×1.5	6*14	25.5	12	30/31	50
MG32-0519-AL	M32×1.5	5*19	32.5	12.5	38/40	20
MG40-1230-AL	M40×1.5/2.0	12*30	40.5	14	48/50	10
MG40-1232-AL	M40×1.5/2.0	12*32	40.5	14	48/50	10
MG50-1334-AL	M50×1.5	13*34	50.5	15	58/60	10
MG63-1641-AL	M63×1.5	16.5*39.5	63.5	15	71/76	1
MG63S-0542-AL	M63×1.5	5.5*42.5	63.5	15	71/65	1
G1/2-0508-AL	G1/2	5*8	21	12	24/24	50
G1/2-0712-AL	G1/2	7*12	21	12	24/24	50
G1/2-0410-AL	G1/2	4*10	21	12	24/26	50
G1/2-0814-AL	G1/2	8*14	21	12	24/26	50
G3/4-0614-AL	G3/4	6*14	26.6	12	30/31	50
G1-0519-AL	G1	5*19	33.5	15	38/40	20
G1-1/4-1230-AL	G1-1/4	12*30	42	15	48/50	10
G1-1/2-1230-AL	G1-1/2	12*30	48	15	55/50	10
G1-1/2-1232-AL	G1-1/2	12*32	48	15	55/50	10
G2-0542-AL	G2	5.5*42.5	60	15	71/65	1

AL 型-铝制多孔金属防水接头

Type SJ -Aluminum cable gland-G and NPT

- 产品材料: 6062 铝, 密封件为 EPDM, 夹紧爪尼龙
- 防护等级: IP68
- 工作温度: $-40^{\circ} \sim 105^{\circ}$
- 阻燃等级: UL94V-2, 可定制 V0 级阻燃
- 订购说明: 默认不附螺母, 如需特殊说明

- Materials: 6062 aluminum, silica gel, nylon
- Waterproof: IP68
- Temperature: $-40^{\circ} \sim 105^{\circ}$
- fire prevention: UL94V-2, Customizable V0
- Ordering Information: Without nut



蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable range	Opening size	Thread length	Wrench Size	quantity
PN.	Metric	mm	mm	mm	nut/cap mm	Pcs/bag
MG12-H2-03-AL	M12×1.5	1.5~3	12.5	9	15/17	50
MG12-H3-02-AL	M12×1.5	1.5~2.6	12.5	9	15/17	50
MG12-H4-02-AL	M12×1.5	1.5~2.3	12.5	9	15/17	50
MG16-H2-04-AL	M16×1.5	2~4	16.5	9.5	20/21	50
MG16-H3-04-AL	M16×1.5	2~4	16.5	9.5	20/21	50
MG16-H4-03-AL	M16×1.5	1.6~3.2	16.5	9.5	20/21	50
MG16-H6-02-AL	M16×1.5	1.2~2.1	16.5	9.5	20/21	50
MG16-H8-02-AL	M16×1.5	1.2~2.1	16.5	9.5	20/21	50
MG20-H2-06-AL	M20×1.5	3~6	20.5	12	24/26	50
MG20-H3-05-AL	M20×1.5	3~5	20.5	12	24/26	50
MG20-H4-05-AL	M20×1.5	3~4.5	20.5	12	24/26	50
MG20-H5-04-AL	M20×1.5	2.5~4	20.5	12	24/26	50
MG20-H6-03-AL	M20×1.5	1.5~3	20.5	12	24/26	50
MG25-H2-08-AL	M25×1.5	5~8	25.5	12	30/31	50
MG25-H3-08-AL	M25×1.5	5~8	25.5	12	30/31	50
MG25-H4-07-AL	M25×1.5	5~7	25.5	12	30/31	50
MG25-H5-06-AL	M25×1.5	4~6	25.5	12	30/31	50
MG25-H6-05-AL	M25×1.5	3~5	25.5	12	30/31	50
MG25-H7-04-AL	M25×1.5	2.5~4	25.5	12	30/31	50
MG25-H8-04-AL	M25×1.5	2.5~4	25.5	12	30/31	50
MG32-H2-10-AL	M32×1.5	6~10	32.5	12.5	38/40	20

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装数量
Product model	Thread size	Cable range	Opening size	Thread length	Wrench Size	quantity
PN.	Metric	mm	mm	mm	nut/cap mm	Pcs/bag
MG32-H3-10-AL	M32×1.5	6~10	32.5	12.5	38/40	20
MG32-H4-09-AL	M32×1.5	7~9	32.5	12.5	38/40	20
MG32-H4-07-AL	M32×1.5	5~7	32.5	12.5	38/40	20
MG32-H5-08-AL	M32×1.5	6~8	32.5	12.5	38/40	20
MG32-H6-07-AL	M32×1.5	5~7	32.5	12.5	38/40	20
MG32-H6-05-AL	M32×1.5	3~5	32.5	12.5	38/40	20
MG40-H2-13-AL	M40×1.5/2.0	9~13	40.5	14	48/50	10
MG40-H3-12-AL	M40×1.5/2.0	9~12	40.5	14	48/50	10
MG40-H4-12-AL	M40×1.5/2.0	9~12	40.5	14	48/50	10
MG40-H5-08-AL	M40×1.5/2.0	6~8	40.5	14	48/50	10
MG40-H6-10-AL	M40×1.5/2.0	7~10	40.5	14	48/50	10
MG40-H6-08-AL	M40×1.5/2.0	6~8	40.5	14	48/50	10
MG40-H7-08-AL	M40×1.5/2.0	6~8	40.5	14	48/50	10
MG40-H8-06-AL	M40×1.5/2.0	4~6	40.5	14	48/50	10
MG40-H8-05-AL	M40×1.5/2.0	3~5	40.5	14	48/50	10
MG40-H9-05-AL	M40×1.5/2.0	3~5	40.5	14	48/50	10
MG40-H10-05-AL	M40×1.5	3~5	40.5	14	48/50	10
MG50-H2-15-AL	M50×1.5	11~15	50.5	15	58/60	10
MG50-H3-12-AL	M50×1.5	8~12	50.5	15	58/60	10
MG63-H2-17-AL	M63×1.5	14~17	63.5	15	71/76	1
MG63-H3-13-AL	M63×1.5	9~13	63.5	15	71/76	1
MG63-H6-12-AL	M63×1.5	9~12	64.5	15	71/76	1