

喇叭口铠装防爆填料函

- **产品材料:** 默认 304, 可选 316 及 316L, 密封件为硅胶
- **防护等级:** IP66
- **工作温度:** -20° ~ 180°
- **产品性能:** 符合 Exd 隔爆, Exe 增安及 ExtD 粉尘防爆
- **订购说明:**

- 1) 特别提示, 发货不附螺母, 如需另外购买
- 2) 产品价格为 (人民币: 元/套, 美元: USD/set)
- 3) 接受定制, 可加长螺纹, 定制锁线范围, 具体联系客服



Bell mouth armored explosion-proof stuffing box

- **Product material:** default 304, optional 316 and 316L, and the seal is silicone
- **Protection grade:** IP66
- **Operating temperature:** - 20 °~180 °
- **Product performance:** Exd explosion-proof, Exe increased safety and ExtD dust explosion-proof
- **Ordering Instructions:**

- 1) Special note: nuts are not attached to the shipment, if you need to purchase separately
- 2) The product price is (RMB: yuan/set, USD: USD/set)
- 3) Accept customization, lengthen the thread, customize the lock range, contact customer service for details

蓝江产品型号 Product model PN.	螺纹规格/Thread size M G NPT Metric G(PF) NPT			电缆范围/Cable range		螺纹长度 Thread L GL mm
				带铠电缆 Armored cable φ mm	内部电缆 Internal cable AG mm	
LBEX-M20-16-SS	M20×1.5	G1/2	NPT1/2	12 ~ 16	6 ~ 10	15
LBEX-M20-20-SS	M20×1.5	G1/2	NPT1/2	15 ~ 20	11 ~ 15	15
LBEX-M25-20-SS	M25×1.5	G3/4	NPT3/4	15 ~ 20	11 ~ 15	15
LBEX-M25-25-SS	M25×1.5	G3/4	NPT3/4	17 ~ 25	15 ~ 20	15
LBEX-M32-25-SS	M32×1.5	G1	NPT1	17 ~ 25	15 ~ 20	15
LBEX-M40-32-SS	M40×1.5	G1-1/4	NPT1-1/4	23 ~ 32	18 ~ 26	15
LBEX-M50-40-SS	M50×1.5	G1-1/2	NPT1-1/2	34 ~ 40	28 ~ 32	15
LBEX-M63-50-SS	M63×1.5	G2	NPT1-1/2	44 ~ 50	35 ~ 45	15
LBEX-M75-66-SS	M75×2.0	G2.5	NPT2.5	58 ~ 68	48 ~ 58	20
LBEX-M90-78-SS	M90×2.0	G3	NPT3	68 ~ 78	56 ~ 67	20

单密封铠装防爆填料函

- **产品材料:** 默认 304, 可选 316 及 316L, 密封件为硅胶
- **防护等级:** IP66
- **工作温度:** -20° ~ 180°
- **产品性能:** 符合 Exd 隔爆, Exe 增安及 ExtD 粉尘防爆
- **订购说明:**

- 4) 特别提示, 发货不附螺母, 如需另外购买
- 5) 产品价格为 (人民币: 元/套, 美元: USD/set)
- 6) 接受定制, 可加长螺纹, 定制锁线范围, 具体联系客服



Single sealed armored explosion-proof stuffing box

- **Product material:** default 304, optional 316 and 316L, and the seal is silicone
- **Protection grade:** IP66
- **Operating temperature:** - 20 ° ~ 180 °
- **Product performance:** Exd explosion-proof, Exe increased safety and ExtD dust explosion-proof
- **Ordering Instructions:**


- 1) Special note: nuts are not attached to the shipment, if you need to purchase separately
- 2) The product price is (RMB: yuan/set, USD: USD/set)
- 3) Accept customization, lengthen the thread, customize the lock range, contact customer service for details

蓝江产品型号	螺纹规格/Thread size			电缆范围/Cable range		螺纹长度
				带铠电缆	内部电缆	
Product model	M	G	NPT	Armored cable	Internal cable	Thread L
PN.	Metric	G(PF)	NPT	φ mm	AG mm	GL mm
DEX2-M20-16-SS	M20×1.5	G1/2	NPT1/2	12 ~ 16	6 ~ 10	15
DEX2-M20-20-SS	M20×1.5	G1/2	NPT1/2	15 ~ 20	11 ~ 15	15
DEX2-M25-20-SS	M25×1.5	G3/4	NPT3/4	15 ~ 20	11 ~ 15	15
DEX2-M25-25-SS	M25×1.5	G3/4	NPT3/4	17 ~ 25	15 ~ 20	15
DEX2-M32-25-SS	M32×1.5	G1	NPT1	17 ~ 25	15 ~ 20	15
DEX2-M40-32-SS	M40×1.5	G1-1/4	NPT1-1/4	23 ~ 32	18 ~ 26	15
DEX2-M50-40-SS	M50×1.5	G1-1/2	NPT1-1/2	34 ~ 40	28 ~ 32	15
DEX2-M63-50-SS	M63×1.5	G2	NPT1-1/2	44 ~ 50	35 ~ 45	15
DEX2-M75-66-SS	M75×2.0	G2.5	NPT2.5	58 ~ 68	48 ~ 58	20
DEX2-M90-78-SS	M90×2.0	G3	NPT3	68 ~ 78	56 ~ 67	20

双密封铠装防爆填料函

- **产品材料:** 默认 304, 可选 316 及 316L, 密封件为硅胶
- **防护等级:** IP66
- **工作温度:** -20° ~ 180°
- **产品性能:** 符合 Exd 隔爆, Exe 增安及 ExtD 粉尘防爆
- **订购说明:**

- 7) 特别提示, 发货不附螺母, 如需另外购买
- 8) 产品价格为 (人民币: 元/套, 美元: USD/set)
- 9) 接受定制, 可加长螺纹, 定制锁线范围, 具体联系客服

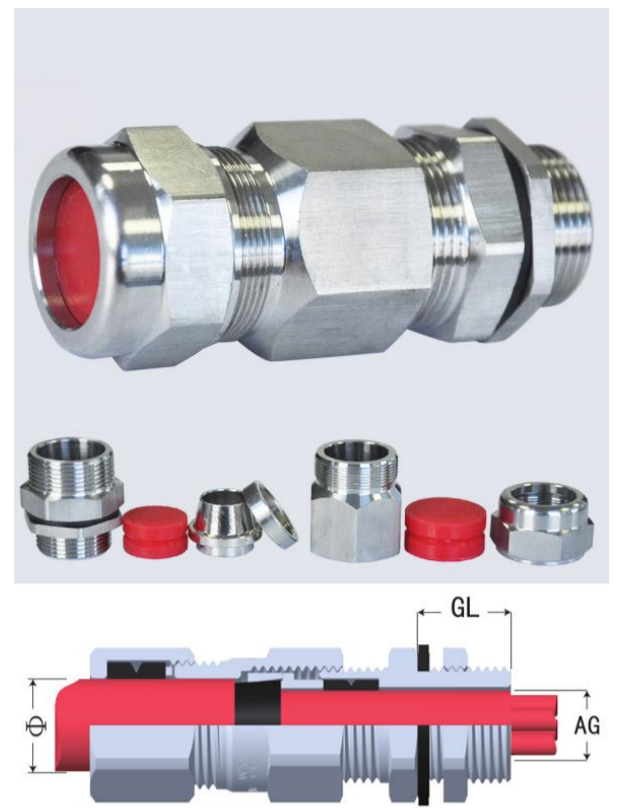

Double sealed armored explosion-proof stuffing box

- **Product material:** default 304, optional 316 and 316L, and the seal is silicone
- **Protection grade:** IP66
- **Operating temperature:** - 20 ° ~ 180 °
- **Product performance:** Exd explosion-proof, Exe increased safety and ExtD dust explosion-proof
- **Ordering Instructions:**

- 1) Special note: nuts are not attached to the shipment, if you need to purchase separately
- 2) The product price is (RMB: yuan/set, USD: USD/set)
- 3) Accept customization, lengthen the thread, customize the lock range, contact customer service for details

蓝江产品型号	螺纹规格/Thread size			电缆范围/Cable range		螺纹长度
				带铠电缆	内部电缆	
Product model	M	G	NPT	Armored cable	Internal cable	Thread L
PN.	Metric	G(PF)	NPT	φ mm	AG mm	GL mm
SKZEX-M20-16-SS	M20×1.5	G1/2	NPT1/2	12 ~ 16	6 ~ 10	15
SKZEX-M20-20-SS	M20×1.5	G1/2	NPT1/2	15 ~ 20	11 ~ 15	15
SKZEX-M25-20-SS	M25×1.5	G3/4	NPT3/4	15 ~ 20	11 ~ 15	15
SKZEX-M25-25-SS	M25×1.5	G3/4	NPT3/4	17 ~ 25	15 ~ 20	15
SKZEX-M32-25-SS	M32×1.5	G1	NPT1	17 ~ 25	15 ~ 20	15
SKZEX-M40-32-SS	M40×1.5	G1-1/4	NPT1-1/4	23 ~ 32	18 ~ 26	15
SKZEX-M50-40-SS	M50×1.5	G1-1/2	NPT1-1/2	34 ~ 40	28 ~ 32	15
SKZEX-M63-50-SS	M63×1.5	G2	NPT1-1/2	44 ~ 50	35 ~ 45	15
SKZEX-M75-66-SS	M75×2.0	G2.5	NPT2.5	58 ~ 68	48 ~ 58	20
SKZEX-M90-78-SS	M90×2.0	G3	NPT3	68 ~ 78	56 ~ 67	20