

防折弯金属电缆防水接头

•**产品材料:** 黄铜镀镍, 密封件 EPDM, 夹紧爪尼龙

•**防护等级:** IP68


•**工作温度:** 常规-40° ~ 105°, 短时可达 120°

•**阻燃等级:** UL94V-2, 可定制 V0 级阻燃

•**产品特性:** 盈利缓释, 可有效保护电缆不被折断。

•**订购说明:**

- 1) 默认五件套: O 型圈, 主体, 夹紧爪, 密封圈, 螺帽;
- 2) 特殊说明, 发货不附螺母, 如需另外购买;
- 3) 产品价格为 (人民币: 元/套, 美元: USD/set)

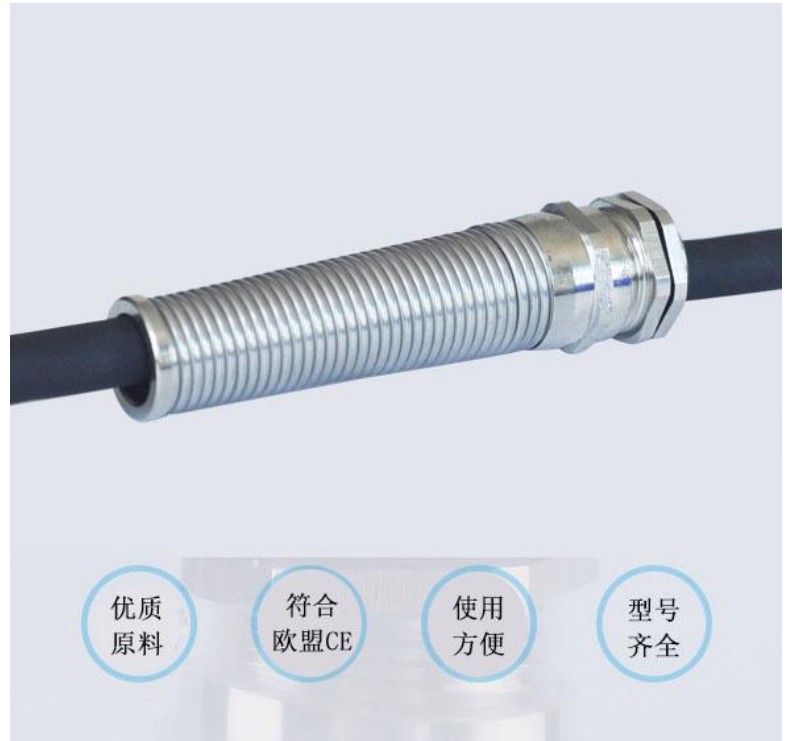

Stress relief metal cable galnd

•**Product material:** brass nickel plating, seal EPDM, clamping claw nylon

•**Protection grade:** IP68

•**Working temperature:** normal - 40 °~105 °, short-term up to 120 °

•**Flame retardant grade:** UL94V-2, customized V0 flame retardant

•**Product features:** profit mitigation, which can effectively protect the cable from being broken.

•**Ordering Instructions:**

- 1) Default five piece set: O-ring, main body, clamping claw, sealing ring, nut;
- 2) Special instructions, nuts are not attached to the shipment, if necessary, purchase separately;
- 3) The product price is (RMB: yuan/set, USD: USD/set)

•**产品图片/Product pictures**



公制尺寸表/Metric size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product B-P model	M Thread	Cable range	Thread length	Wrench Size
PN.	M	φ mm	GL mm	SW1/SW2
MG6B-P-03	M6×1.0	2.5 ~ 3	4	8/8
MG8B-P-04	M8×1.0	3 ~ 4	6	11/11
MG10B-P-06	M10×1.5	3 ~ 6.5	7	14/14
MG12B-P-06	M12×1.5	3 ~ 6.5	6	14/14
MG12B-P-08	M14×1.5	4 ~ 8	6	14/16
MG14B-P-06	M14×1.5	3 ~ 6.5	6	14/16
MG14B-P-08	M14×1.5	4 ~ 8	7	17/17
MG16B-P-08	M16×1.5	4 ~ 8	7	17/18
MG16B-P-10	M16×1.5	5 ~ 10	7	20/20
MG18B-P-10	M18×1.5	5 ~ 10	7	20/20
MG20B-P-08	M20×1.5	4 ~ 8	7	17/22
MG20B-P-10	M20×1.5	5 ~ 10	7	20/22
MG20B-P-12	M20×1.5	6 ~ 12	7	22/22
MG20B-P-14	M20×1.5	8 ~ 14	7	24/24
MG22B-P-14	M22×1.5	8 ~ 14	8	24/24
MG24B-P-14	M24×1.5	8 ~ 14	8	24/27
MG25B-P-14	M25×1.5	8 ~ 14	8	24/27
MG25B-P-16	M25×1.5	10 ~ 16	8	27/27
MG25B-P-18	M25×1.5	13 ~ 18	8	30/30
MG27B-P-18	M27×2.0	13 ~ 18	8	30/30
MG30B-P-18	M30×2.0	13 ~ 18	8	30/32
MG32B-P-22	M32×1.5	15 ~ 22	9	34/34
MG32B-P-25	M32×1.5	18 ~ 25	9	40/40

德制 PG 尺寸表/PG size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product- model	M Thread	Cable range	Thread length	Wrench Size
PN.	PG	φ mm	GL mm	S1/S2 mm
PG7B-P-06	PG7	3 ~ 6.5	6	14/14
PG9B-P-08	PG9	4 ~ 8	7	17/17
PG9B-P-10	PG9	5 ~ 10	7	20/20
PG11B-P-10	PG11	5 ~ 10	7	20/20
PG13.5B-P-08	PG13.5	4 ~ 8	7	17/22
PG13.5B-P-10	PG13.5	5 ~ 10	7	20/22
PG13.5B-P-12	PG13.5	6 ~ 12	7	22/22
PG13.5B-P-14	PG13.5	8 ~ 14	7	24/24
PG16B-P-12	PG16	6 ~ 12	8	22/24
PG16B-P-14	PG16	8 ~ 14	8	24/24
PG19B-P-14	PG19	8 ~ 14	8	24/27
PG21B-P-16	PG21	10 ~ 16	8	27/30
PG21B-P-18	PG21	13 ~ 18	8	30/30
PG25B-P-20	PG25	15 ~ 20	8	30/32
PG29B-P-25	PG29	18 ~ 25	9	40/40
PG36B-P-25	PG36	18 ~ 25	10	40/50
PG36B-P-32	PG36	24 ~ 32	10	50/50

英制 G 尺寸表/G size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product B-P model	M Thread	Cable range	Thread length	Wrench Size
PN.	G	φ mm	GL mm	S1/S2 mm
G1/4B-P-06	G1/4	3 ~ 6.5	6	14/16
G3/8B-P-08	G3/8	4 ~ 8	7	17/18
G1/2B-P-10	G1/2	5 ~ 10	8	20/22
G1/2B-P-12	G1/2	6 ~ 12	8	22/22
G1/2B-P-14	G1/2	8 ~ 14	8	24/24
G3/4B-P-18	G3/4	13 ~ 18	8	30/30
G1B-P-22	G1	16 ~ 22	9	34/36
G1B-P-25	G1	18 ~ 25	9	40/40
NPT1/4B-P-06	NPT1/4	3 ~ 6.5	6	14/16
NPT3/8B-P-08	NPT3/8	4 ~ 8	7	17/18
NPT1/2B-P-10	NPT1/2	5 ~ 10	8	20/22
NPT1/2B-P-12	NPT1/2	6 ~ 12	8	22/22
NPT1/2B-P-14	NPT1/2	8 ~ 14	8	24/24
NPT3/4B-P-18	NPT3/4	13 ~ 18	8	30/30
NPT1B-P-22	NPT1	16 ~ 22	9	34/36
NPT1B-P-25	NPT1	18 ~ 25	9	40/40