


## 接管式防爆电缆防水接头

- 产品材料:** 黄铜镀镍, 密封件 EPDM
- 防护等级:** IP68
- 工作温度:** 常规-40° ~ 105°, 短时可达 120°
- 阻燃等级:** UL94V-2, 可定制 V0 级阻燃
- 产品特性:** 内外丝设计, 连接挠性管及镀锌钢管。
- 订购说明:**
  - 1) 默认四件套: O 型圈, 主体, 密封圈, 螺帽;
  - 2) 特殊说明, 发货不附螺母, 如需另外购买;
  - 3) 产品价格为 (人民币: 元/套, 美元: USD/set)

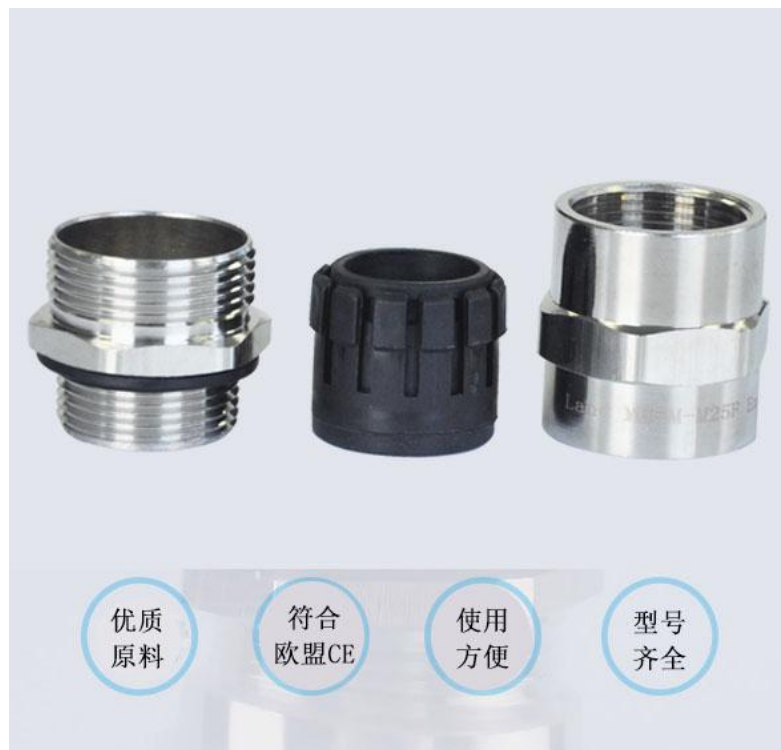

## Connect pipe explosion-proof cable gland

- Product material:** brass nickel plating, seal EPDM
- Protection grade:** IP68
- Working temperature:** normal - 40 °~105 °, short-term up to 120 °
- Flame retardant grade:** UL94V-2, customized V0 flame retardant
- Product features:** internal and external wire design, connecting flexible pipe and galvanized steel pipe.
- Ordering Instructions:**
  - 1) Default four piece set: O-ring, main body, sealing ring, nut;
  - 2) Special instructions, nuts are not attached to the shipment, if necessary, purchase separately;
  - 3) The product price is (RMB: yuan/set, USD: USD/set)
- 产品应用/Product application**




## 产品尺寸表/Product size

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸
Product model	M-thread	F-thread	Cable range	Thread L	Wrench Size
PN.	M	F	φ mm	GL mm	nut/cap mm
JGEX-M12M-M12F-08	M12×1.5	M12×1.5	4~8	9	15/17
JGEX-M16M-M16F-10	M16×1.5	M16×1.5	6~10	9.5	20/21
JGEX-M20M-M20F-12	M20×1.5	M20×1.5	7~12	12	24/24
JGEX-M20M-M20F-14	M20×1.5	M20×1.5	8~14	12	24/26
JGEX-M25M-M25F-18	M25×1.5	M25×1.5	13~18	12	30/31
JGEX-M32M-M32F-25	M32×1.5	M32×1.5	18~25	12.5	38/40
JGEX-M40M-M40F-31	M40×1.5	M40×1.5	25~31	14	48/50
JGEX-M50M-M50F-41	M50×1.5	M50×1.5	33~41	15	58/60
JGEX-M63M-M63F-44	M63×1.5	M63×1.5	36~44	15	71/65
JGEX-G1/2M-G1/2F-12	G1/2	G1/2	7~12	12	24/24
JGEX-G3/4M-G3/4F-18	G3/4	G3/4	13~18	12	31/31
JGEX-G1M-G1F-25	G1	G1	18~25	12.5	38/40
JGEX-G1-1/4M-G1-1/4F-31	G1-1/4	G1-1/4	25~31	14	48/50
JGEX-G1-1/2M-G1-1/2-31	G1-1/2	G1-1/2	25~31	15	58/50
JGEX-G2M-G2F-44	G2	G2	36~44	15	71/65
JGEX-NPT1/2M-G1/2F-12	G1/2	G1/2	7~12	12	24/24
JGEX-NPT3/4M-G3/4F-18	G3/4	G3/4	13~18	12	31/31
JGEX-NPT1M-G1F-25	G1	G1	18~25	12.5	38/40
JGEX-NPT1-1/4M-G1-1/4F-31	G1-1/4	G1-1/4	25~31	14	48/50
JGEX-NPT1-1/2M-G1-1/2-31	G1-1/2	G1-1/2	25~31	15	58/50
JGEX-NPT2M-G2F-44	G2	G2	36~44	15	71/65

## 接管式电缆防水接头

- 产品材料:** 黄铜镀镍, 密封件 EPDM
- 防护等级:** IP68
- 工作温度:** 常规-40° ~ 105°, 短时可达 120°
- 阻燃等级:** UL94V-2, 可定制 V0 级阻燃
- 产品特性:** 内外丝设计, 连接挠性管及镀锌钢管。
- 订购说明:**
  - 1) 默认四件套: O 型圈, 主体, 密封圈, 螺帽;
  - 2) 特殊说明, 发货不附螺母, 如需另外购买;
  - 3) 产品价格为 (人民币: 元/套, 美元: USD/set)

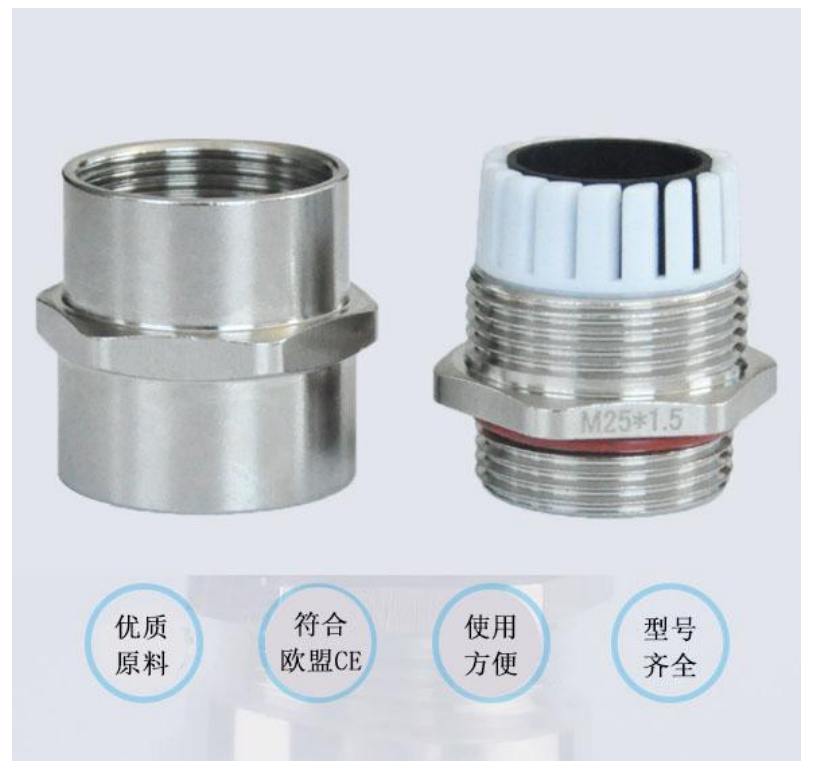

## Connect pipe waterproof cable gland

- Product material:** brass nickel plating, seal EPDM
- Protection grade:** IP68
- Working temperature:** normal - 40 °~105 °, short-term up to 120 °
- Flame retardant grade:** UL94V-2, customized V0 flame retardant
- Product features:** internal and external wire design, connecting flexible pipe and galvanized steel pipe.
- Ordering Instructions:**
  - 1) Default four piece set: O-ring, main body, sealing ring, nut;
  - 2) Special instructions, nuts are not attached to the shipment, if necessary, purchase separately;
  - 3) The product price is (RMB: yuan/set, USD: USD/set)
- 产品应用/Product application**



## 产品尺寸表/Product size

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸
Produc model	M-thread	F-thread	Cable range	Thread length	Wrench Size
PN.	M	F	φ mm	GL mm	SW1/SW2
JG-M12-06	M12×1.5	M12×1.5	3 ~ 6.5	6	14/14
JG-M12-08	M14×1.5	M14×1.5	4 ~ 8	6	14/16
JG-M16-08	M16×1.5	M16×1.5	4 ~ 8	7	17/14
JG-M16-08	M16×1.5	M16×1.5	4 ~ 8	7	17/18
JG-M16-10	M16×1.5	M16×1.5	5 ~ 10	7	20/20
JG-M18-10	M18×1.5	M18×1.5	5 ~ 10	7	20/20
JG-M20-12	M20×1.5	M20×1.5	6 ~ 12	7	22/22
JG-M20-14	M20×1.5	M20×1.5	8 ~ 14	7	24/24
JG-M25-16	M25×1.5	M25×1.5	10 ~ 16	8	27/27
JG-M25-18	M25×1.5	M25×1.5	13 ~ 18	8	30/30
JG-M32-22	M32×1.5	M32×1.5	15 ~ 22	9	34/34
JG-M32-25	M32×1.5	M32×1.5	18 ~ 25	9	40/40
JG-M40-25	M40×1.5	M40×1.5	18 ~ 25	9	40/43
JG-M40-28	M40×1.5	M40×1.5	20 ~ 28	10	43/43
JG-M40-30	M40×1.5	M40×1.5	22 ~ 30	10	45/45
JG-M40-32	M40×1.5	M40×1.5	24 ~ 32	10	50/50
JG-M50-32	M50×1.5	M50×1.5	24 ~ 32	12	57/55
JG-M50-38	M50×1.5	M50×1.5	30 ~ 38	12	57/55
JG-M63-44	M63×1.5	M63×1.5	37 ~ 44	12	64/68

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸
Produc model	M-thread	F-thread	Cable range	Thread length	Wrench Size
PN.	M	F	φ mm	GL mm	S1/S2 mm
JG-G1/4-06	G1/4	G1/4	3 ~ 6.5	6	14/16
JG-G3/8-08	G3/8	G3/8	4 ~ 8	7	17/18
JG-G1/2-10	G1/2	G1/2	5 ~ 10	8	20/22
JG-G1/2-12	G1/2	G1/2	6 ~ 12	8	22/22
JG-G1/2-14	G1/2	G1/2	8 ~ 14	8	24/24
JG-G3/4-18	G3/4	G3/4	13 ~ 18	8	30/30
JG-G1-22	G1	G1	16 ~ 22	9	34/36
JG-G1-25	G1	G1	18 ~ 25	9	40/40
JG-G1-1/4-28	G1-1/4	G1-1/4	22 ~ 28	10	43/45
JG-G1-1/4-30	G1-1/4	G1-1/4	23 ~ 30	10	45/45
JG-G1-1/2-32	G1-1/2	G1-1/2	25 ~ 32	10	50/52
JG-G2-44	G2	G2	37 ~ 44	12	64/64
JG-G2-1/2-52	G2-1/2	G2-1/2	42 ~ 52	15	76/81
JG-G3-70	G3	G3	65 ~ 70	18	98/98