

DPJ 型-端接式锌合金管接头

DPJ type - Zinc alloy flexible pipe connector

- 产品材料：锌合金
- 防护等级：IP65
- 工作温度：-40°~105°

•Product material: Zinc alloy

•Protection grade: IP65

•Operating temperature: - 40 ° ~ 105 °




蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸
Product model	hose	M Thread	Thread length	Wrench Size
PN.	φ mm	M	GL mm	cap mm
DPJ-M16-10	φ10	M16×1.5	9	22
DPJ-M20-12	φ12	M20×1.5	10	26
DPJ-M20-15	φ15	M20×1.5	10	30
DPJ-M24-15	φ15	M24×1.5	11	30
DPJ-M25-20	φ20	M25×1.5	12	35
DPJ-M27-20	φ20	M27×2.0	12	35
DPJ-M30-20	φ20	M30×2.0	12	35
DPJ-M32-25	φ25	M32×1.5	15	43
DPJ-M33-25	φ25	M33×2.0	15	43
DPJ-M36-25	φ25	M36×2.0	15	43
DPJ-M36-32	φ32	M36×2.0	15	52
DPJ-M40-32	φ32	M40×1.5	15	52
DPJ-M42-32	φ32	M42×2.0	15	52
DPJ-M48-32	φ32	M48×2.0	15	52
DPJ-M48-38	φ38	M48×2.0	15	60
DPJ-M50-38	φ38	M50×1.5	18	60
DPJ-M60-51	φ51	M60×2.0	20	71
DPJ-M63-51	φ51	M63×1.5	20	71
DPJ-G3/8-10	φ10	G3/8	7	22
DPJ-G3/8-12	φ12	G3/8	10	26
DPJ-G1/2-15	φ15	G1/2	10	30
DPJ-G3/4-20	φ20	G3/4	12	35
DPJ-G1-25	φ25	G1	14	43
DPJ-G1-1/4-32	φ32	G1-1/4	14	52
DPJ-G1-1/2-38	φ38	G1-1/2	16	60
DPJ-G2-51	φ51	G2	16	71
DPJ-NPT1/2-15	φ15	NPT1/2	10	30
DPJ-NPT3/4-20	φ20	NPT3/4	12	35
DPJ-NPT1-25	φ25	NPT1	14	43

DKJ 型-卡套式锌合金管接头

DKJ type - Zinc alloy flexible pipe connector

- 产品材料: 锌合金
- 防护等级: IP65
- 工作温度: -40° ~ 105°

- Product material: Zinc alloy
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °

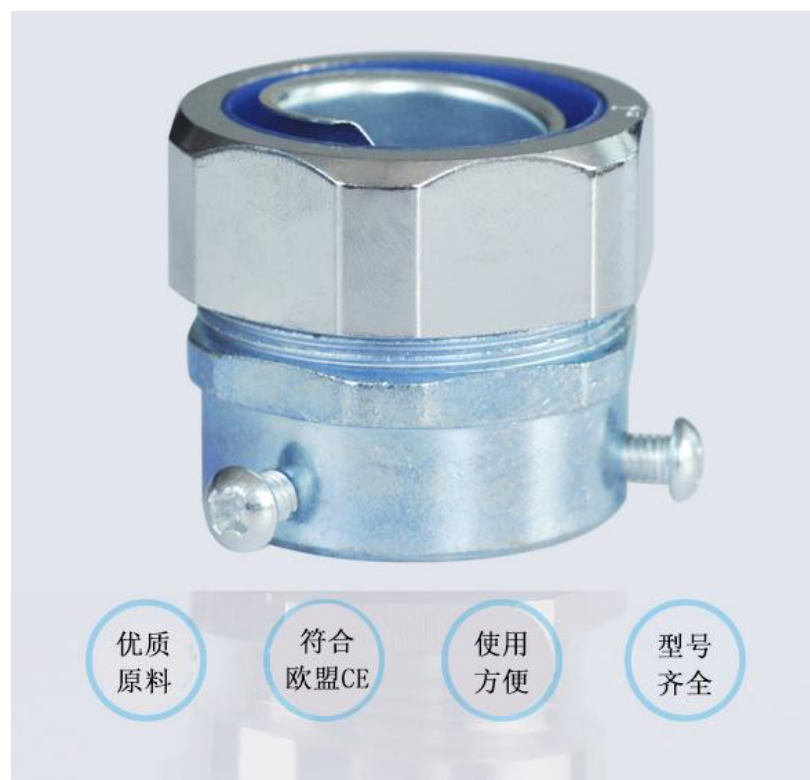

公称直径/Nominal diameter

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Product size	Thin tube	Product size
PN.	φ mm				
DKJ-G3/8-12	φ12	#12	17×2.25	#15	15.87×1.6
DKJ-G1/2-15	φ15	#15	21.25×2.75	#20	19.05×1.6
DKJ-G3/4-20	φ20	#20	26.75×2.75	#25	25.4×1.8
DKJ-G1-25	φ25	#25	33.5×3.35	#32	31.75×1.8
DKJ-G1-1/4-32	φ32	#32	42.25×3.25	#40	38.1×1.8
DKJ-G1-1/2-38	φ38	#40	48×3.35	#50	50.8×1.8
DKJ-G2-51	φ51	#50	60×3.5	#70	63.5×2.5
DKJ-G2-1/2-64	φ64	#70	75.5×3.75	#80	76.2×3.2

英制直径/Inch diameter


蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Product size	Thin tube	Product size
PN.	φ mm				
DKJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DKJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DKJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DKJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DKJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DKJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DKJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DKJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

DGJ 型-自固式锌合金管接头

DGJ type - Zinc alloy flexible pipe connector

- 产品材料: 锌合金
- 防护等级: IP65
- 工作温度: -40° ~ 105°

- Product material: Zinc alloy
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °

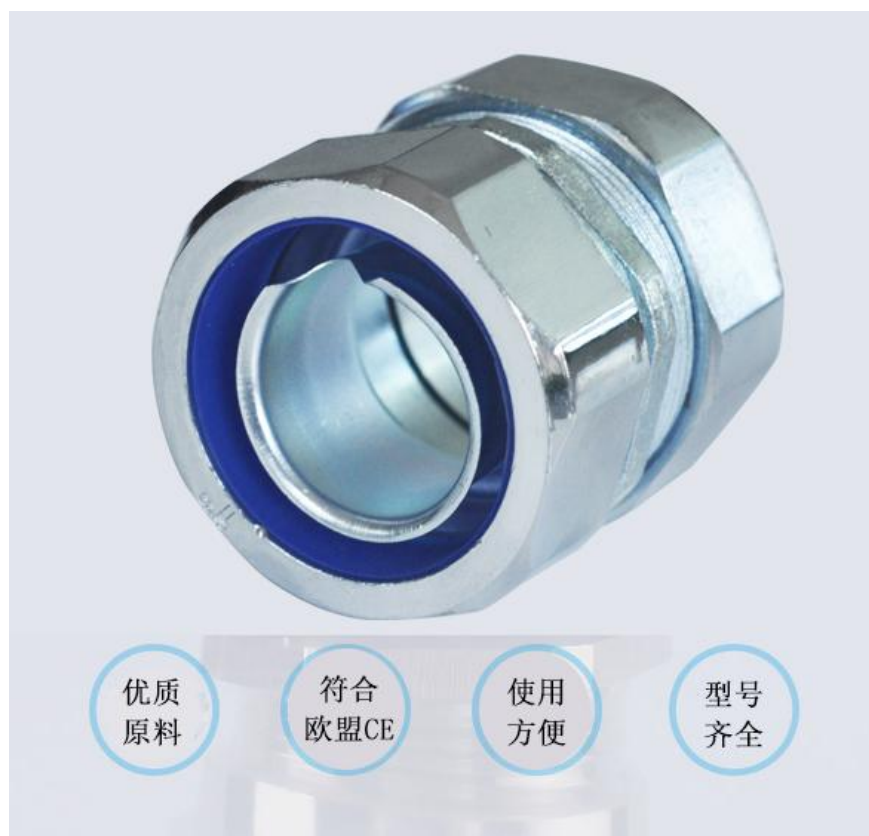

公称直径/Nominal diameter

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Product size	Thin tube	Product size
PN.	φ mm				
DGJ-G3/8-12	φ12	#12	17×2.25	#15	15.87×1.6
DGJ-G1/2-15	φ15	#15	21.25×2.75	#20	19.05×1.6
DGJ-G3/4-20	φ20	#20	26.75×2.75	#25	25.4×1.8
DGJ-G1-25	φ25	#25	33.5×3.35	#32	31.75×1.8
DGJ-G1-1/4-32	φ32	#32	42.25×3.25	#40	38.1×1.8
DGJ-G1-1/2-38	φ38	#40	48×3.35	#50	50.8×1.8
DGJ-G2-51	φ51	#50	60×3.5	#70	63.5×2.5
DGJ-G2-1/2-64	φ64	#70	75.5×3.75	#80	76.2×3.2

英制直径/Inch diameter

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Product size	Thin tube	Product size
PN.	φ mm				
DGJ-G3/8-12	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DGJ-G1/2-15	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DGJ-G3/4-20	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DGJ-G1-25	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DGJ-G1-1/4-32	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DGJ-G1-1/2-38	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DGJ-G2-51	2"	2"	60×3.5	2-1/2"	63.5×2.5
DGJ-G2-1/2-64	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

DNJ 型-自固式锌合金管接头


DNJ type - Zinc alloy flexible pipe connector

- 产品材料: 锌合金
- 防护等级: IP65
- 工作温度: -40° ~ 105°

•Product material: Zinc alloy

•Protection grade: IP65

•Operating temperature: - 40 ° ~ 105 °

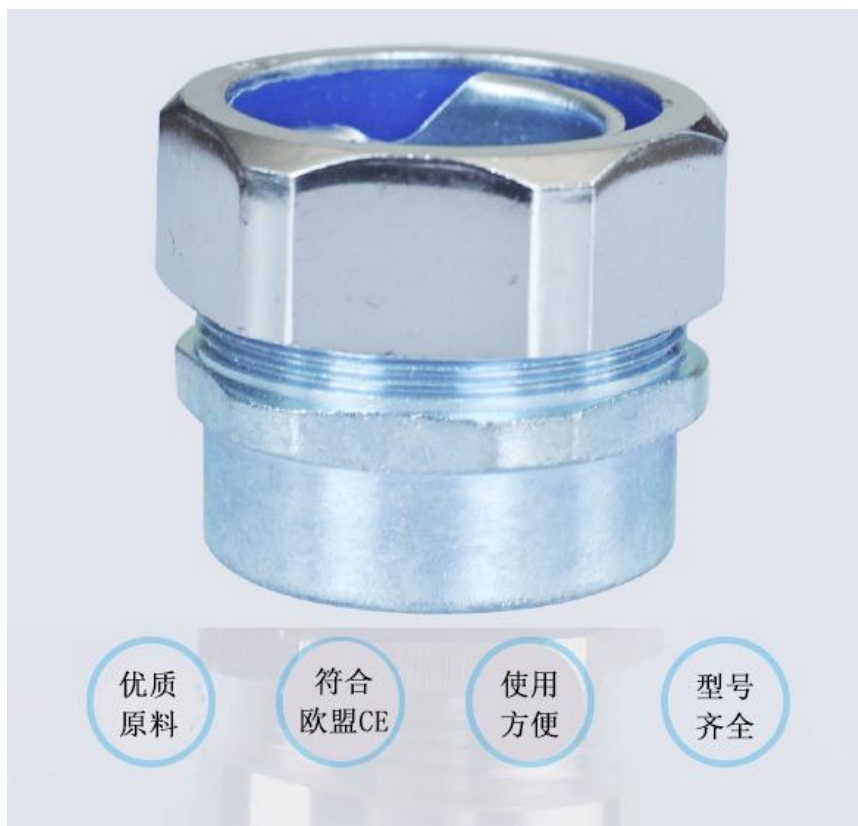

蓝江产品型号	适配软管	内螺纹	扳手尺寸
Product model	hose	F Thread	Wrench Size
PN.	φ mm	F	cap mm
DNJ-M16-10	φ10	M16×1.5	24
DNJ-M20-12	φ12	M20×1.5	27
DNJ-M20-15	φ15	M20×1.5	30
DNJ-M20-20	φ20	M20×1.5	36
DNJ-M25-20	φ20	M25×1.5	36
DNJ-M32-25	φ25	M32×1.5	42
DNJ-M40-32	φ32	M40×1.5	52
DNJ-M50-38	φ38	M50×1.5	60
DNJ-M63-51	φ51	M63×1.5	75
DNJ-G3/8-10	φ10	G3/8	24
DNJ-G3/8-12	φ12	G3/8	26
DNJ-G1/2-15	φ15	G1/2	30
DNJ-G3/4-20	φ20	G3/4	36
DNJ-G1-25	φ25	G1	42
DNJ-G1-1/4-32	φ32	G1-1/4	52
DNJ-G1-1/2-38	φ38	G1-1/2	60
DNJ-G2-51	φ51	G2	75

DWJ 型-自固式锌合金管接头

DWJ type - Zinc alloy flexible pipe connector

- 产品材料：锌合金
- 防护等级：IP65
- 工作温度：-40°~105°

•Product material: Zinc alloy

•Protection grade: IP65

•Operating temperature: - 40 ° ~ 105 °



蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度
Product model	hose	M Thread	Thread diameter	Thread length
PN.	φ mm	M	AG mm	GL mm
DWJ-M16-10	φ10	M16×1.5	16	10
DWJ-M20-12	φ12	M20×1.5	20	10
DWJ-M20-15	φ15	M20×1.5	20	12
DWJ-M20-20	φ20	M20×1.5	20	12
DWJ-M25-20	φ20	M25×1.5	25	12
DWJ-M32-25	φ25	M32×1.5	32	15
DWJ-M40-32	φ32	M40×1.5	40	15
DWJ-M50-38	φ38	M50×1.5	50	16
DWJ-M63-51	φ51	M63×1.5	63	16
DWJ-G3/8-10	φ10	G3/8	16.65	10
DWJ-G3/8-12	φ12	G3/8	16.65	10
DWJ-G1/2-15	φ15	G1/2	20.95	12
DWJ-G3/4-20	φ20	G3/4	26.44	12
DWJ-G1-25	φ25	G1	33.24	15
DWJ-G1-1/4-32	φ32	G1-1/4	41.91	15
DWJ-G1-1/2-38	φ38	G1-1/2	47.8	15
DWJ-G2-51	φ51	G2	59.61	15
DWJ-NPT3/8-10	φ10	NPT3/8	16.65	10
DWJ-NPT3/8-12	φ12	NPT3/8	16.65	10
DWJ-NPT1/2-15	φ15	NPT1/2	20.85	12
DWJ-NPT3/4-20	φ20	NPT3/4	26.3	12
DWJ-NPT1-25	φ25	NPT1	33.15	15
DWJ-NPT1-1/4-32	φ32	NPT1-1/4	41.85	15
DWJ-NPT1-1/2-38	φ38	NPT1-1/2	47.75	15
DWJ-NPT2-51	φ51	NPT2	59.55	15