

# DPJ 型-端接式不锈钢管接头

DPJ type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP66/68
- 工作温度：-40°~105°

- Product material: stainless steel
- Protection grade: IP66/68
- Operating temperature: - 40 °~ 105 °



## 产品尺寸表/Product size

蓝江产品型号	适配软管	公制螺纹	螺纹长度	扳手尺寸
Product model	hose	M Thread	Thread length	Wrench Size
PN.	φ mm	M	GL mm	cap mm
DPJ-M16-10-SS	φ10	M16×1.5	10	24
DPJ-M20-12-SS	φ12	M20×1.5	10	27
DPJ-M20-15-SS	φ15	M20×1.5	12	30
DPJ-M20-20-SS	φ20	M20×1.5	12	36
DPJ-M25-20-SS	φ20	M25×1.5	12	36
DPJ-M32-25-SS	φ25	M32×1.5	15	42
DPJ-M40-32-SS	φ32	M40×1.5	15	52
DPJ-M50-38-SS	φ38	M50×1.5	16	60
DPJ-M63-51-SS	φ51	M63×1.5	16	75
DPJ-G3/8-10-SS	φ10	G3/8	10	24
DPJ-G3/8-12-SS	φ12	G3/8	10	26
DPJ-G1/2-15-SS	φ15	G1/2	12	30
DPJ-G3/4-20-SS	φ20	G3/4	12	36
DPJ-G1-25-SS	φ25	G1	15	42
DPJ-G1-1/4-32-SS	φ32	G1-1/4	15	52
DPJ-G1-1/2-38-SS	φ38	G1-1/2	15	60
DPJ-G2-51-SS	φ51	G2	15	75
DPJ-NPT3/8-10-SS	φ10	NPT3/8	10	24
DPJ-NPT3/8-12-SS	φ12	NPT3/8	10	26
DPJ-NPT1/2-15-SS	φ15	NPT1/2	12	30
DPJ-NPT3/4-20-SS	φ20	NPT3/4	12	36
DPJ-NPT1-25-SS	φ25	NPT1	15	42
DPJ-NPT1-1/4-32-SS	φ32	NPT1-1/4	15	52
DPJ-NPT1-1/2-38-SS	φ38	NPT1-1/2	15	60
DPJ-NPT2-51-SS	φ51	NPT2	15	75

# DKJ 型-卡套式不锈钢管接头

DKJ type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP65
- 工作温度：-40° ~ 105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °



## 公称直径/Nominal diameter

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Pipe size	Thin pipe	Pipe size
PN.	mm				
DKJ-G3/8-12-SS	φ12	#12	17×2.25	#15	15.87×1.6
DKJ-G1/2-15-SS	φ15	#15	21.25×2.75	#20	19.05×1.6
DKJ-G3/4-20-SS	φ20	#20	26.75×2.75	#25	25.4×1.8
DKJ-G1-25-SS	φ25	#25	33.5×3.35	#32	31.75×1.8
DKJ-G1-1/4-32-SS	φ32	#32	42.25×3.25	#40	38.1×1.8
DKJ-G1-1/2-38-SS	φ38	#40	48×3.35	#50	50.8×1.8
DKJ-G2-51-SS	φ51	#50	60×3.5	#70	63.5×2.5
DKJ-G2-1/2-64-SS	φ64	#70	75.5×3.75	#80	76.2×3.2

## 英制直径/Inch diameter


蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Pipe size	Thin pipe	Pipe size
PN.	mm				
DKJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DKJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DKJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DKJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DKJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DKJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DKJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5
DKJ-G2-1/2-64-SS	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

# DGJ 型-自固式不锈钢管接头

DGJ type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP65
- 工作温度：-40°~105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 °~ 105 °

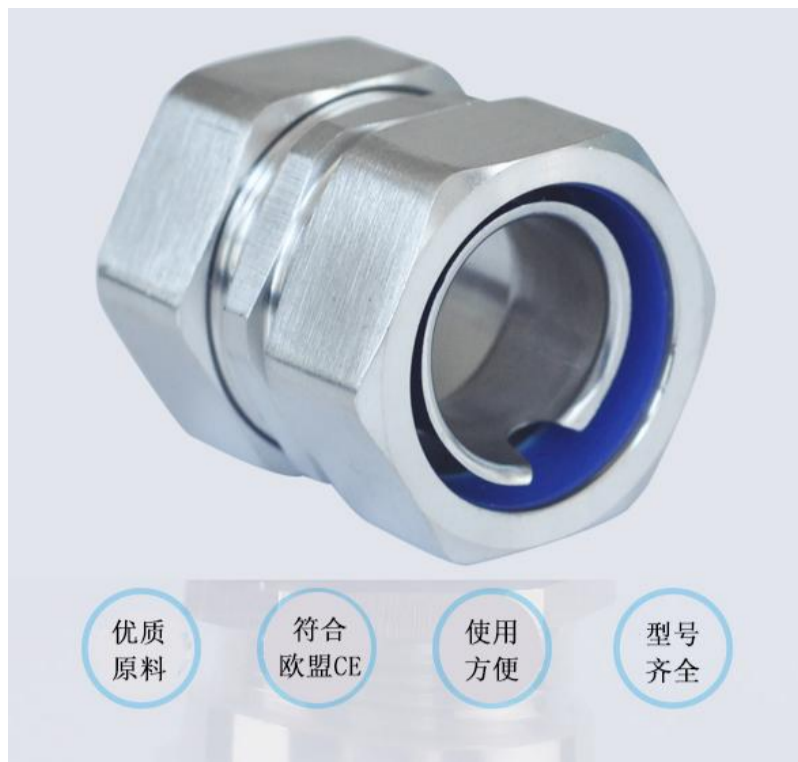

## 公称直径/Nominal diameter

蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Pipe size	Thin pipe	Pipe size
PN.	mm				
DGJ-G3/8-12-SS	φ12	#12	17×2.25	#15	15.87×1.6
DGJ-G1/2-15-SS	φ15	#15	21.25×2.75	#20	19.05×1.6
DGJ-G3/4-20-SS	φ20	#20	26.75×2.75	#25	25.4×1.8
DGJ-G1-25-SS	φ25	#25	33.5×3.35	#32	31.75×1.8
DGJ-G1-1/4-32-SS	φ32	#32	42.25×3.25	#40	38.1×1.8
DGJ-G1-1/2-38-SS	φ38	#40	48×3.35	#50	50.8×1.8
DGJ-G2-51-SS	φ51	#50	60×3.5	#70	63.5×2.5
DGJ-G2-1/2-64-SS	φ64	#70	75.5×3.75	#80	76.2×3.2

## 英制直径/Inch diameter


蓝江产品型号	适配软管	厚钢管	外径/壁厚	薄钢管	外径×壁厚
Product model	hose	Thick pipe	Pipe size	Thin pipe	Pipe size
PN.	mm				
DGJ-G3/8-12-SS	3/8"	3/8"	17×2.25	1/2"	15.87×1.6
DGJ-G1/2-15-SS	1/2"	1/2"	21.25×2.75	3/4"	19.05×1.6
DGJ-G3/4-20-SS	3/4"	3/4"	26.75×2.75	1"	25.4×1.8
DGJ-G1-25-SS	1"	1"	33.5×3.35	1-1/4"	31.75×1.8
DGJ-G1-1/4-32-SS	1-1/4"	1-1/4"	42.25×3.25	1-1/2"	38.1×1.8
DGJ-G1-1/2-38-SS	1-1/2"	1-1/2"	48×3.35	2"	50.8×1.8
DGJ-G2-51-SS	2"	2"	60×3.5	2-1/2"	63.5×2.5
DGJ-G2-1/2-64-SS	2-1/2"	2-1/2"	75.5×3.75	3"	76.2×3.2

# DNJ 型-内螺纹不锈钢管接头

DNJ type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP65
- 工作温度：-40° ~ 105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °

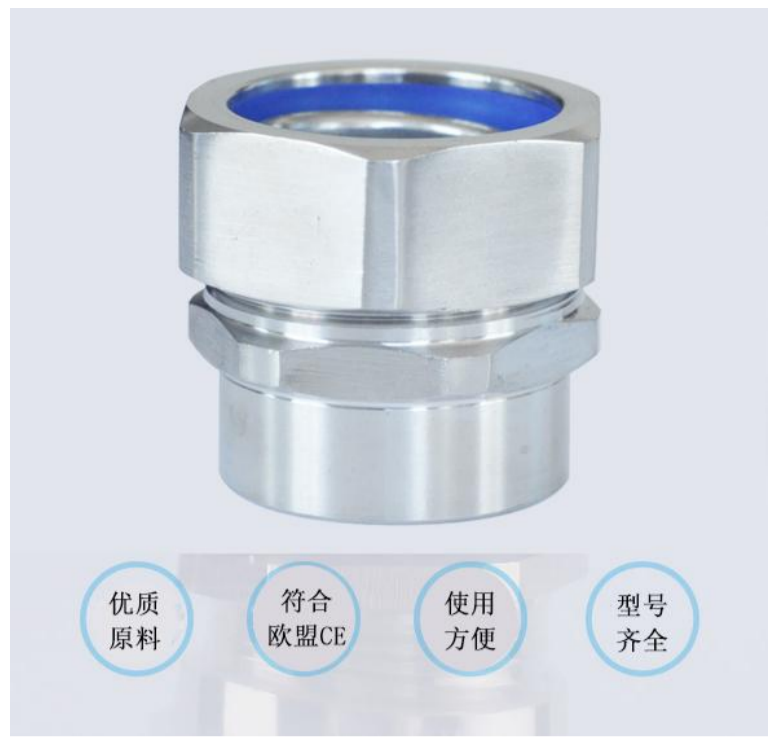

## 产品尺寸表/Product size

蓝江产品型号	适配软管	内螺纹	扳手尺寸
Product model	hose	F Thread	Wrench Size
PN.	φ mm	F	cap mm
DNJ-M16-10-SS	φ10	M16×1.5	24
DNJ-M20-12-SS	φ12	M20×1.5	27
DNJ-M20-15-SS	φ15	M20×1.5	30
DNJ-M20-20-SS	φ20	M20×1.5	36
DNJ-M25-20-SS	φ20	M25×1.5	36
DNJ-M32-25-SS	φ25	M32×1.5	42
DNJ-M40-32-SS	φ32	M40×1.5	52
DNJ-M50-38-SS	φ38	M50×1.5	60
DNJ-M63-51-SS	φ51	M63×1.5	75
DNJ-G3/8-10-SS	φ10	G3/8	24
DNJ-G3/8-12-SS	φ12	G3/8	26
DNJ-G1/2-15-SS	φ15	G1/2	30
DNJ-G3/4-20-SS	φ20	G3/4	36
DNJ-G1-25-SS	φ25	G1	42
DNJ-G1-1/4-32-SS	φ32	G1-1/4	52
DNJ-G1-1/2-38-SS	φ38	G1-1/2	60
DNJ-G2-51-SS	φ51	G2	75

# DWJ 型-弯角式不锈钢管接头

DWJ type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP65
- 工作温度：-40°~105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °



蓝江产品型号	适配软管	公制螺纹	螺纹直径	螺纹长度
Product model	hose	M Thread	Thread diameter	Thread length
PN.	φ mm	M	AG mm	GL mm
DWJ-M16-10-SS	φ10	M16×1.5	16	10
DWJ-M20-12-SS	φ12	M20×1.5	20	10
DWJ-M20-15-SS	φ15	M20×1.5	20	12
DWJ-M20-20-SS	φ20	M20×1.5	20	12
DWJ-M25-20-SS	φ20	M25×1.5	25	12
DWJ-M32-25-SS	φ25	M32×1.5	32	15
DWJ-M40-32-SS	φ32	M40×1.5	40	15
DWJ-M50-38-SS	φ38	M50×1.5	50	16
DWJ-M63-51-SS	φ51	M63×1.5	63	16
DWJ-G3/8-10-SS	φ10	G3/8	16.65	10
DWJ-G3/8-12-SS	φ12	G3/8	16.65	10
DWJ-G1/2-15-SS	φ15	G1/2	20.95	12
DWJ-G3/4-20-SS	φ20	G3/4	26.44	12
DWJ-G1-25-SS	φ25	G1	33.24	15
DWJ-G1-1/4-32-SS	φ32	G1-1/4	41.91	15
DWJ-G1-1/2-38-SS	φ38	G1-1/2	47.8	15
DWJ-G2-51-SS	φ51	G2	59.61	15
DWJ-NPT3/8-10-SS	φ10	NPT3/8	16.65	10
DWJ-NPT3/8-12-SS	φ12	NPT3/8	16.65	10
DWJ-NPT1/2-15-SS	φ15	NPT1/2	20.85	12
DWJ-NPT3/4-20-SS	φ20	NPT3/4	26.3	12
DWJ-NPT1-25-SS	φ25	NPT1	33.15	15
DWJ-NPT1-1/4-32-SS	φ32	NPT1-1/4	41.85	15
DWJ-NPT1-1/2-38-SS	φ38	NPT1-1/2	47.75	15
DWJ-NPT2-51-SS	φ51	NPT2	59.55	15

# RG 型-带锁紧式不锈钢管接头 M

RG type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP68
- 工作温度：-40°~105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 °~ 105 °



蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度
Product model	Thread size	Cable range	Adapter tube	Thread length
PN.	Metric	φ mm	φ mm	GL mm
RG6-M12-08-SS	M12×1.5	4~8	φ6	9
RG6-M12-05-SS	M12×1.5	3~5.5	φ6	9
RG10-M12-08-SS	M12×1.5	4~8	φ10	9
RG10-M16-10-SS	M16×1.5	6~10	φ10	9.5
RG10-M18-10-SS	M18×1.5	6~10	φ10	9.5
RG12-M20-09-SS	M20×1.5	5~9	φ12	12
RG12-M20-12-SS	M20×1.5	7~12	φ12	12
RG15-M20-14-SS	M20×1.5	8~14	φ15	12
RG20-M20-14-SS	M20×1.5	8~14	φ20	12
RG15-M22-14-SS	M22×1.5	8~14	φ15	12
RG15-M24-14-SS	M24×1.5	8~14	φ15	10.5
RG20-M25-18-SS	M25×1.5	13~18	φ20	12
RG25-M25-18-SS	M25×1.5	13~18	φ25	12
RG20-M27-18-SS	M27×1.5	13~18	φ20	12
RG20-M30-18-SS	M30×2.0	13~18	φ20	12.5
RG25-M32-25-SS	M32×1.5	18~25	φ25	12.5
RG25-M36-25-SS	M36×2.0	18~25	φ25	13
RG32-M40-32-SS	M40×1.5	25~31	φ32	14
RG32-M40-25-SS	M40×1.5	18~25	φ32	14
RG32-M42-32-SS	M42×2.0	25~31	φ32	15
RG32-M48-32-SS	M48×2.0	25~31	φ32	15
RG38-M50-41-SS	M50×1.5	33~41	φ38	15
RG38-M50-33-SS	M50×1.5	25~33	φ38	15
RG51-M60-44-SS	M60×2.0	36~44	φ51	15
RG51-M63-54-SS	M63×1.5	46~54	φ51	15

# RG 型-带锁紧式不锈钢管接头 G

RG type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP68
- 工作温度：-40°~105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 °~ 105 °



蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度
Product model	Thread size	Cable range	Adapter tube	Thread length
PN.	Metric	φ mm	φ mm	GL mm
RG6-G1/4-08-SS	G1/4	4~8	φ6	9
RG6-G1/4-05-SS	G1/4	3~5.5	φ6	9
RG10-G3/8-10-SS	G3/8	6~10	φ10	9.5
RG10-G3/8-07-SS	G3/8	4~7	φ10	9.5
RG15-G1/2-14-SS	G1/2	8~14	φ15	12
RG12-G1/2-12-SS	G1/2	7~12	φ15	12
RG12-G1/2-11-SS	G1/2	6~11	φ12	12
RG12-G1/2-09-SS	G1/2	5~9	φ12	12
RG20-G3/4-18-SS	G3/4	13~18	φ20	12
RG20-G3/4-16-SS	G3/4	12~16	φ20	12
RG25-G1-25-SS	G1	18~25	φ25	15
RG25-G1-22-SS	G1	17~22	φ25	15
RG32-G1-1/4-31-SS	G1-1/4	25~31	φ32	15
RG32-G1-1/4-25-SS	G1-1/4	18~25	φ32	15
RG38-G1-1/2-41-SS	G1-1/2	33~41	φ38	15
RG38-G1-1/2-33-SS	G1-1/2	25~33	φ38	15
RG32-G1-1/2-31-SS	G1-1/2	25~31	φ32	15
RG32-G1-1/2-25-SS	G1-1/2	18~25	φ32	15
RG51-G2-44-SS	G2	36~44	φ51	15

# RG 型-带锁紧式不锈钢管接头 NPT

RG type - stainless steel flexible pipe connector

- 产品材料：不锈钢
- 防护等级：IP68
- 工作温度：-40° ~ 105°

- Product material: stainless steel
- Protection grade: IP65
- Operating temperature: - 40 ° ~ 105 °



蓝江产品型号	螺纹规格	电缆范围	适配软管	螺纹长度
Product model	Thread size	Cable range	Adapter tube	Thread length
PN.	NPT	mm	φ mm	mm
RG6-NPT1/4-08-SS	NPT1/4	4 ~ 8	φ6	9
RG6-NPT1/4-05-SS	NPT1/4	3 ~ 5.5	φ6	9
RG10-NPT3/8-10-SS	NPT3/8	6 ~ 10	φ10	9.5
RG10-NPT3/8-07-SS	NPT3/8	4 ~ 7	φ10	9.5
RG15-NPT1/2-14-SS	NPT1/2	8 ~ 14	φ15	12
RG12-NPT1/2-12-SS	NPT1/2	7 ~ 12	φ15	12
RG12-NPT1/2-11-SS	NPT1/2	6 ~ 11	φ12	12
RG12-NPT1/2-09-SS	NPT1/2	5 ~ 9	φ12	12
RG20-NPT3/4-18-SS	NPT3/4	13 ~ 18	φ20	12
RG20-NPT3/4-16-SS	NPT3/4	12 ~ 16	φ20	12
RG25-NPT1-25-SS	NPT1	18 ~ 25	φ25	15
RG25-NPT1-22-SS	NPT1	17 ~ 22	φ25	15
RG32-NPT1-1/4-31-SS	NPT1-1/4	25 ~ 31	φ32	15
RG32-NPT1-1/4-25-SS	NPT1-1/4	18 ~ 25	φ32	15
RG38-NPT1-1/2-41-SS	NPT1-1/2	33 ~ 41	φ38	15
RG38-NPT1-1/2-33-SS	NPT1-1/2	25 ~ 33	φ38	15
RG32-NPT1-1/2-31-SS	NPT1-1/2	25 ~ 31	φ32	15
RG32-NPT1-1/2-25-SS	NPT1-1/2	18 ~ 25	φ32	15
RG51-NPT2-44-SS	NPT2	36 ~ 44	φ51	15