

Ex系列-防爆铜镀镍防水接头

Explosion proof Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械

订购说明: 默认不附螺母, 配扁型防水密封垫片

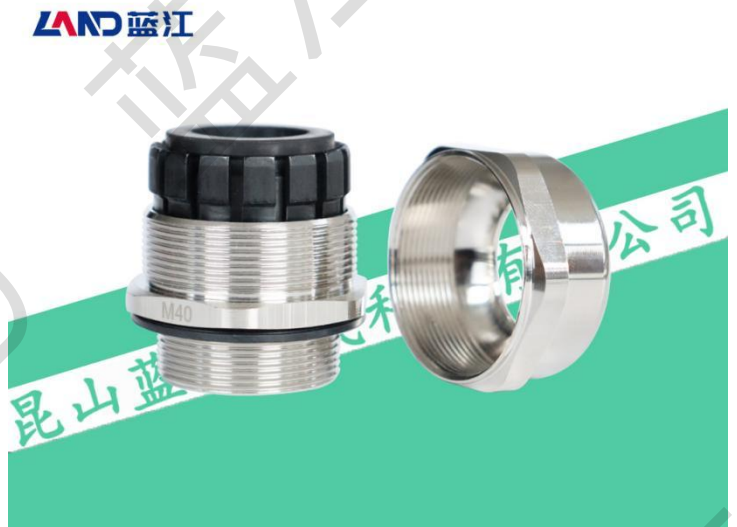

Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with flat washers



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-08	M12×1.5	12	4~8	8	17/17	50
MG12A-05	M12×1.5	12	3~5	8	17/17	50
MG16AS-08	M16×1.5	16	4~8	8	18/18	50
MG16AS-05	M16×1.5	16	3~5	8	18/18	50
MG16A-10	M16×1.5	16	6~10	9	22/22	50
MG16A-07	M16×1.5	16	4~7	9	22/22	50
MG16A-05	M16×1.5	16	3~5	9	22/22	50
MG16A-04	M16×1.5	16	2~4	9	22/22	50
MG18A-14	M18×1.5	18	8~14	9.5	26/26	50
MG18A-10	M18×1.5	18	6~10	9	22/22	50
MG18A-07	M18×1.5	18	4~7	9	22/22	50
MG20AS-12	M20×1.5	20	7~12	10	24/24	50
MG20AS-11	M20×1.5	20	6~11	10	24/24	50
MG20AS-09	M20×1.5	20	5~9	10	24/24	50
MG20A-14	M20×1.5	20	8~14	10	26/26	50
MG20A-12	M20×1.5	20	6~11	10	26/26	50
MG20A-09	M20×1.5	20	5~9	10	26/26	50
MG20A-06	M20×1.5	20	3~6.5	10	26/26	50
MG25A-18	M25×1.5	25	13~18	12	32/32	50
MG25A-16	M25×1.5	25	11~16	12	32/32	50
MG25A-14	M25×1.5	25	8~14	12	32/32	50
MG25A-10	M25×1.5	25	6~10	12	32/32	50
MG25A-08	M25×1.5	25	4~8	12	32/32	50
MG25A-06	M25×1.5	25	3~6	12	32/32	50
MG32A-25	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30	M40×1.5	40	24~30	15	50/50	10
MG40A-25	M40×1.5	40	18~25	15	50/50	10
MG50A-40	M50×1.5	50	33~40	15	59/59	10
MG50A-33	M50×1.5	50	25~33	15	59/59	10
MG63A-51	M63×1.5	63	46~51	15	73/73	10
MG63A-46	M63×1.5	63	40~46	15	73/73	10
MG63A-35	M63×1.5	63	28~35	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7A-08	PG7	12.5	4~8	8	17/17	50
PG7A-05	PG7	12.5	3~5	8	17/17	50
PG9A-08	PG9	15.2	4~8	8	18/18	50
PG9A-05	PG9	15.2	3~5	8	18/18	50
PG11A-10	PG11	18.6	6~10	9	22/22	50
PG11A-07	PG11	18.6	4~7	9	22/22	50
PG11A-05	PG11	18.6	3~5	9	22/22	50
PG11A-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-12	PG13.5	20.4	7~12	9.5	24/24	50
PG13.5A-11	PG13.5	20.4	6.5~10.5	9.5	24/24	50
PG13.5A-09	PG13.5	20.4	5~9	9.5	24/24	50
PG16A-14	PG16	22.5	8~14	10	26/26	50
PG16A-12	PG16	22.5	6~12	10	26/26	50
PG16A-06	PG16	22.5	3~6.5	10	26/26	50
PG21A-18	PG21	28.3	13~18	12	32/32	50
PG21A-16	PG21	28.3	11~16	12	32/32	50
PG21A-14	PG21	28.3	8~14	12	32/32	50
PG21A-10	PG21	28.3	6~10	12	32/32	50
PG21A-09	PG21	28.3	6~9	12	32/32	50
PG21A-08	PG21	28.3	4~8	12	32/32	50
PG21A-06	PG21	28.3	3~6.5	12	32/32	50
PG29A-25	PG29	37	18~25	12.5	40/40	20
PG29A-22	PG29	37	16~22	12.5	40/40	20
PG36A-30	PG36	47	24~30	15	50/50	10
PG36A-25	PG36	47	18~25	15	50/50	10
PG42A-40	PG42	54	33~40	15	59/59	10
PG42A-33	PG42	54	25~33	15	59/59	10
PG48A-51	PG48	59.3	44~51	15	73/73	10
PG48A-46	PG48	59.3	39~46	15	73/73	10
PG48A-35	PG48	59.3	28~35	15	73/73	10

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08	G1/4	13.15	4~8	8	17/17	50
G1/4A-05	G1/4	13.15	3~5	8	17/17	50
G3/8A-10	G3/8	16.66	6~10	9	22/22	50
G3/8A-07	G3/8	16.66	4~7	9	22/22	50
G3/8A-05	G3/8	16.66	3~5	9	22/22	50
G3/8A-04	G3/8	16.66	2~4	9	22/22	50
G1/2A-12	G1/2	20.95	7~12	9.5	24/24	50
G1/2A-11	G1/2	20.95	6~10.5	9.5	24/24	50
G1/2A-09	G1/2	20.95	5~9	9.5	24/24	50
G1/2A-14	G1/2	20.95	8~14	10	26/26	50
G1/2A-06	G1/2	20.95	3~6	10	26/26	50
G3/4A-18	G3/4	26.66	13~18	12	32/32	50
G3/4A-16	G3/4	26.66	11~16	12	32/32	50
G3/4A-14	G3/4	26.66	8~14	12	32/32	50
G3/4A-10	G3/4	26.66	6~10	12	32/32	50
G3/4A-09	G3/4	26.66	6~9	12	32/32	50
G3/4A-08	G3/4	26.66	4~8	12	32/32	50
G3/4A-06	G3/4	26.66	3~6.5	12	32/32	50
G1A-25	G1	33.2	18~25	12.5	40/40	20
G1A-22	G1	33.2	16~22	12.5	40/40	20
G1-1/4A-30	G1-1/4	41.9	24~30	15	50/50	10
G1-1/4A-25	G1-1/4	41.9	18~25	15	50/50	10
G1-1/2A-40	G1-1/2	47.8	33~40	15	59/59	10
G1-1/2A-33	G1-1/2	47.8	25~33	15	59/59	10
G2A-51	G2	59.6	44~51	15	68/68	10
G2A-46	G2	59.6	39~46	15	68/68	10
G2A-35	G2	59.6	28~35	15	68/68	10

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
NPT1/4A-08	NPT1/4	13.15	4~8	8	17	50
NPT1/4A-05	NPT1/4	13.15	3~5	8	17	50
NPT3/8A-10	NPT3/8	16.66	6~10	9	22	50
NPT3/8A-07	NPT3/8	16.66	4~7	9	22	50
NPT3/8A-05	NPT3/8	16.66	3~5	9	22	50
NPT3/8A-04	NPT3/8	16.66	2~4	9	22	50
NPT1/2A-12	NPT1/2	20.95	7~12	9.5	24	50
NPT1/2A-11	NPT1/2	20.95	6~10.5	9.5	24	50
NPT1/2A-09	NPT1/2	20.95	5~9	9.5	24	50
NPT1/2A-14	NPT1/2	20.95	8~14	10	26	50
NPT1/2A-06	NPT1/2	20.95	3~6	10	26	50
NPT3/4A-18	NPT3/4	26.66	13~18	12	32	50
NPT3/4A-16	NPT3/4	26.66	11~16	12	32	50
NPT3/4A-14	NPT3/4	26.66	8~14	12	32	50
NPT3/4A-10	NPT3/4	26.66	6~10	12	32	50
NPT3/4A-09	NPT3/4	26.66	6~9	12	32	50
NPT3/4A-08	NPT3/4	26.66	4~8	12	32	50
NPT3/4A-06	NPT3/4	26.66	3~6.5	12	32	50
NPT1A-25	NPT1	33.2	18~25	12.5	40	20
NPT1A-22	NPT1	33.2	16~22	12.5	40	20
NPT1-1/4A-30	NPT1-1/4	41.9	24~30	15	50	10
NPT1-1/4A-25	NPT1-1/4	41.9	18~25	15	50	10
NPT1-1/2A-40	NPT1-1/2	47.8	33~40	15	59	10
NPT1-1/2A-33	NPT1-1/2	47.8	25~33	15	59	10
NPT2A-51	NPT2	59.6	44~51	15	68	10
NPT2A-46	NPT2	59.6	39~46	15	68	10
NPT2A-35	NPT2	59.6	28~35	15	68	10

B系列-直通铜镀镍防水接头

B Series - Straight through brass nickel plated cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40°C~105°C，短时可达120°C

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG4B-02	M4×0.7	4	1.5~2	2.5	5/5	100
MG5B-03	M5×0.8	5	2.5~3	3	6/6	100
MG6B-03	M6×1.0	6	2.5~3	4	8/8	100
MG8B-04	M8×1.25	8	3~4	6	11/11	100
MG8B-05	M8×1.0	8	4~5.2	6	14/14	100
MG10B-06	M10×1.0	10	3~6.5	6	14/14	100
MG12B-06	M12×1.5	12	3~6.5	6	14/14	100
MG12B-08	M12×1.5	12	4~8	6	14/16	100
MG14B-06	M14×1.5	14	3~6.5	6	14/16	100
MG14B-08	M14×1.5	14	4~8	7	17/17	100
MG16B-08	M16×1.5	16	4~8	7	17/18	100
MG16B-10	M16×1.5	16	5~10	7	20/20	100
MG18B-10	M18×1.5	18	5~10	7	20/20	100
MG20B-10	M20×1.5	20	5~10	8	20/22	100
MG20B-12	M20×1.5	20	6~12	8	22/22	100
MG20B-14	M20×1.5	20	8~14	8	24/24	100
MG22B-12	M22×1.5	22	6~12	8	24/22	100
MG22B-14	M22×1.5	22	8~14	8	24/24	100
MG24B-14	M24×1.5	24	8~14	8	24/27	100
MG25B-14	M25×1.5	25	8~14	8	24/27	50
MG25B-16	M25×1.5	25	10~16	8	27/27	50
MG25B-18	M25×1.5	25	13~18	8	30/30	50
MG27B-16	M27×1.5(2)	27	11~16	8	30/27	50
MG27B-18	M27×1.5(2)	27	13~18	8	30/30	50
MG30B-16	M30×1.5(2)	30	11~16	8	30/27	50
MG30B-18	M30×1.5(2)	30	13~18	8	30/32	50
MG30B-20	M30×1.5(2)	30	15~20	8	30/32	50
MG32B-18	M32×1.5(2)	32	13~18	9	34	50
MG32B-22	M32×1.5(2)	32	15~22	9	34/34	50
MG32B-25	M32×1.5(2)	32	18~25	9	40/40	50
MG33B-22	M33×1.5(2)	33	15~22	9	34/36	50
MG36B-22	M36×1.5(2)	36	16~22	9	40/34	50
MG36B-25	M36×1.5(2)	36	18~25	9	40/40	50
MG40B-25	M40×1.5(2)	40	18~25	9	40/43	20
MG40B-28	M40×1.5(2)	40	20~28	10	43/43	20
MG40B-30	M40×1.5(2)	40	22~30	10	45/45	20
MG40B-32	M40×1.5(2)	40	24~32	10	50/50	20
MG42B-28	M42×1.5(2)	42	20~28	10	43/45	20
MG42B-30	M42×1.5(2)	42	22~30	10	45/50	20

MG48B-32	M48×1.5(2)	48	24~32	10	50/52	20
MG50B-32	M50×1.5(2)	50	24~32	10	57/55	20
MG50B-38	M50×1.5(2)	50	30~38	10	58/55	20
MG54B-38	M54×1.5(2)	54	30~38	12	57/55	20
MG56B-38	M56×1.5(2)	56	30~38	12	57/55	20
MG60B-44	M60×1.5(2)	60	37~44	12	64/64	10
MG63B-44	M63×1.5(2)	63	37~44	12	64/68	10
MG63B-53	M63×1.5(2)	63	43~53	15	78/76	10
MG64B-44	M64×1.5(2)	64	37~44	12	64/68	10
MG72B-52	M72×1.5(2)	72	43~53	15	73/78	1
MG75B-52	M75×1.5(2)	75	43~53	15	76/81	1
MG76B-52	M76×1.5(2)	76	43~53	15	76/81	1
MG80B-62	M80×1.5(2)	80	52~62	16	86/87	1
MG85B-62	M85×1.5(2)	85	52~62	16	92	1
MG85B-70	M85×1.5(2)	85	60~70	18	98	1
MG88B-70	M88×1.5(2)	88	60~70	17	98	1
MG90B-70	M90×1.5(2)	90	60~70	17	98	1
MG100B-80	M100×1.5(2)	100	70~80	22	110	1

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
PG7B-06	PG7	12.5	3~6.5	6	14/14	100
PG9B-08	PG9	15.2	4~8	7	17/17	100
PG9B-10	PG9	15.2	5~10	7	20/20	100
PG11B-10	PG11	18.6	5~10	7	20/20	100
PG13.5B-08	PG13.5	20.4	4~8	7	17/22	100
PG13.5B-10	PG13.5	20.4	5~10	7	20/22	100
PG13.5B-12	PG13.5	20.4	6~12	7	22/22	100
PG13.5B-14	PG13.5	20.4	8~14	7	24/24	100
PG16B-12	PG16	22.5	6~12	8	22/24	100
PG16B-14	PG16	22.5	8~14	8	24/24	100
PG19B-14	PG19	23.8	8~14	8	24/27	100
PG21B-16	PG21	28.3	10~16	8	27/30	50
PG21B-18	PG21	28.3	13~18	8	30/30	50
PG25B-18	PG25	30	13~18	8	30/32	50
PG29B-25	PG29	37	18~25	9	40/40	50
PG36B-25	PG36	47	18~25	10	40/50	20
PG36B-32	PG36	47	24~32	10	50/50	20
PG42B-38	PG42	54	30~38	10	58/58	10
PG48B-44	PG48	59.3	37~44	12	64/64	10
PG63B-52	PG63	71	42~52	15	76	10

产品参数表/G (PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Bhread	Hole size	Cable range	Bhread lengBh	Wrench Size	packaging
PN.	G	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
G1/4B-06	G1/4	13.15	3~6.5	6	14/16	100
G3/8B-08	G3/8	16.65	4~8	7	17/18	100
G1/2B-10	G1/2	20.95	5~10	8	20/22	100
G1/2B-12	G1/2	20.95	6~12	8	22/22	100
G1/2B-14	G1/2	20.95	8~14	8	24/24	100
G3/4B-14	G3/4	26.44	8~14	8	30/30	100
G3/4B-16	G3/4	26.44	11~16	8	30/30	100
G3/4B-18	G3/4	26.44	13~18	8	30/30	100
G1B-22	G1	33.24	16~22	9	34/36	50
G1B-25	G1	33.24	18~25	9	40/40	50
G1-1/4B-28	G1-1/4	41.91	22~28	10	43/45	20
G1-1/4B-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2B-32	G1-1/2	47.80	25~32	10	50/52	20
G2B-44	G2	59.61	37~44	12	64/64	10
G2-1/2B-52	G2-1/2	76	42~52	15	76/81	10
G3B-70	G3	90	65~70	18	98/98	10

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Bhread	Hole size	Cable range	Bhread lengBh	Wrench Size	packaging
PN.	NPT	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
NPT1/4B-06	NPT1/4	13.15	3~6.5	6	14/16	100
NPT3/8B-08	NPT3/8	16.65	4~8	7	17/18	100
NPT1/2B-10	NPT1/2	20.95	5~10	8	20/22	100
NPT1/2B-12	NPT1/2	20.95	6~12	8	22/22	100
NPT1/2B-14	NPT1/2	20.95	8~14	8	24/24	100
NPT3/4B-14	NPT3/4	26.44	8~14	8	30/30	100
NPT3/4B-16	NPT3/4	26.44	11~16	8	30/30	100
NPT3/4B-18	NPT3/4	26.44	13~18	8	30/30	100
NPT1B-22	NPT1	33.24	16~22	9	34/36	50
NPT1B-25	NPT1	33.24	18~25	9	40/40	50
NPT1-1/4B-28	NPT1-1/4	41.91	22~28	10	43/45	20
NPT1-1/4B-30	NPT1-1/4	41.91	23~30	10	45/45	20
NPT1-1/2B-32	NPT1-1/2	47.80	25~32	10	50/52	20
NPT2B-44	NPT2	59.61	37~44	12	64/64	10
NPT2-1/2B-52	NPT2-1/2	76	42~52	15	76/81	10
NPT3B-70	NPT3	90	65~70	18	98/98	10

T系列-半通铜镀镍防水接头

T Series - Straight through brass nickel plated cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙


产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封

LAND 蓝江

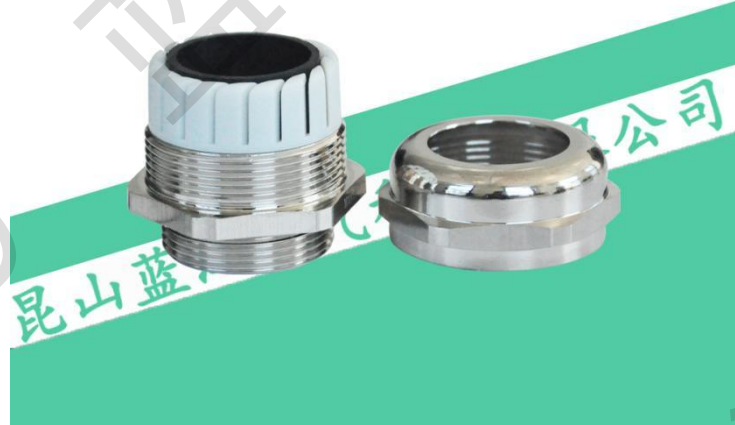

Product materials: Nickel Plated Brass


Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings

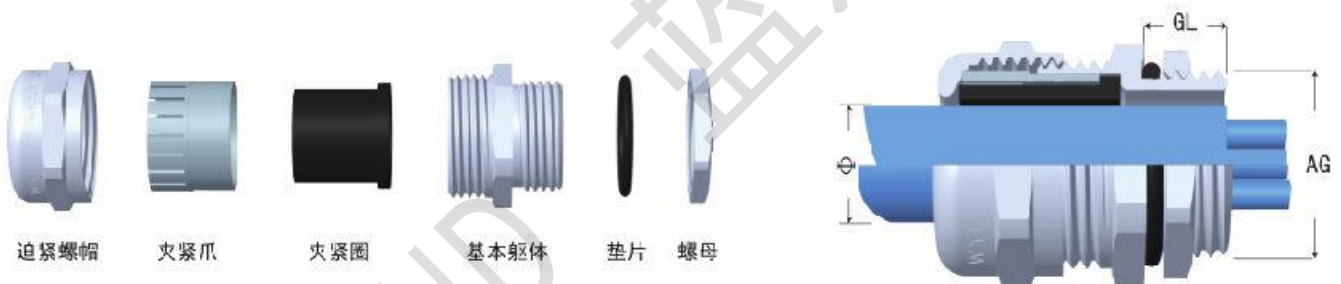

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	CaTle range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG8T-04	M8×1.25	8	3~4	6	11/11	100
MG10T-06	M10×1.0	10	3~6.5	6	14/14	100
MG12T-06	M12×1.5	12	3~6.5	6	14/14	100
MG12T-08	M12×1.5	12	4~8	6	14/16	100
MG14T-06	M14×1.5	14	3~6.5	6	14/16	100
MG14T-08	M14×1.5	14	4~8	7	17/17	100
MG16T-08	M16×1.5	16	4~8	7	17/18	100
MG16T-10	M16×1.5	16	5~10	7	20/20	100
MG18T-10	M18×1.5	18	5~10	7	20/20	100
MG20T-10	M20×1.5	20	5~10	8	20/22	100
MG20T-12	M20×1.5	20	6~12	8	22/22	100
MG20T-14	M20×1.5	20	8~14	8	24/24	100
MG22T-14	M22×1.5	22	8~14	8	24/24	100
MG24T-14	M24×1.5	24	8~14	8	24/27	100
MG25T-14	M25×1.5	25	8~14	8	24/27	50
MG25T-16	M25×1.5	25	10~16	8	27/27	50
MG25T-18	M25×1.5	25	13~18	8	30/30	50
MG27T-18	M27×1.5 (2)	27	13~18	8	30/30	50
MG30T-18	M30×1.5 (2)	30	13~18	8	30/32	50
MG30T-20	M30×1.5 (2)	30	15~20	8	30/32	50
MG32T-22	M32×1.5 (2)	32	15~22	9	34/34	50
MG32T-25	M32×1.5 (2)	32	18~25	9	40/40	50
MG33T-22	M33×1.5 (2)	33	15~22	9	34/36	50
MG36T-25	M36×1.5 (2)	36	18~25	9	40/40	50
MG40T-25	M40×1.5 (2)	40	18~25	9	40/43	20
MG40T-28	M40×1.5 (2)	40	20~28	10	43/43	20
MG40T-30	M40×1.5 (2)	40	22~30	10	45/45	20
MG40T-32	M40×1.5 (2)	40	24~32	10	50/50	20
MG42T-28	M42×1.5 (2)	42	20~28	10	43/45	20
MG48T-32	M48×1.5 (2)	48	24~32	10	50/52	20
MG50T-32	M50×1.5 (2)	50	24~32	10	57/55	20
MG50T-38	M50×1.5 (2)	50	30~38	10	58/55	20
MG60T-44	M60×1.5 (2)	60	37~44	12	64/64	10
MG63T-44	M63×1.5 (2)	63	37~44	12	64/68	10
MG63T-53	M63×1.5 (2)	63	43~53	15	78/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
PG7T-06	PG7	12.5	3~6.5	6	14/14	100
PG9T-08	PG9	15.2	4~8	7	17/17	100
PG11T-10	PG11	18.6	5~10	7	20/20	100
PG13.5T-12	PG13.5	20.4	6~12	7	22/22	100
PG16T-14	PG16	22.5	8~14	8	24/24	100
PG19T-14	PG19	23.8	8~14	8	24/27	100
PG21T-18	PG21	28.3	13~18	8	30/30	50
PG25T-18	PG25	30	13~18	8	30/32	50
PG29T-25	PG29	37	18~25	9	40/40	50
PG36T-32	PG36	47	24~32	10	50/50	20
PG42T-38	PG42	54	30~38	10	58/58	10
PG48T-44	PG48	59.3	37~44	12	64/64	10
PG63T-52	PG63	71	42~52	15	76	10
G1/4T-06	G1/4	13.15	3~6.5	6	14/16	100
G3/8T-08	G3/8	16.65	4~8	7	17/18	100
G1/2T-12	G1/2	20.95	6~12	8	22/22	100
G3/4T-18	G3/4	26.44	13~18	8	30/30	100
G1T-22	G1	33.24	16~22	9	34/36	50
G1T-25	G1	33.24	18~25	9	40/40	50
G1-1/4T-28	G1-1/4	41.91	22~28	10	43/45	20
G1-1/4T-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2T-32	G1-1/2	47.8	25~32	10	50/52	20
G2T-44	G2	59.61	37~44	12	64/64	10
NPT1/4T-06	NPT1/4	13.15	3~6.5	6	14/16	100
NPT3/8T-08	NPT3/8	16.65	4~8	7	17/18	100
NPT1/2T-12	NPT1/2	20.95	6~12	8	22/22	100
NPT3/4T-18	NPT3/4	26.44	13~18	8	30/30	100
NPT1T-22	NPT1	33.24	16~22	9	34/36	50
NPT1T-25	NPT1	33.24	18~25	9	40/40	50
NPT1-1/4T-28	NPT1-1/4	41.91	22~28	10	43/45	20
NPT1-1/4T-30	NPT1-1/4	41.91	23~30	10	45/45	20
NPT1-1/2T-32	NPT1-1/2	47.8	25~32	10	50/52	20
NPT2T-44	NPT2	59.61	37~44	12	64/64	10
NPT2-1/2T-52	NPT2-1/2	76	42~52	15	76/81	10
NPT3T-70	NPT3	90	65~70	18	98/98	10

A-EMC防磁波铜镀镍电缆防水接头

A-EMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃


设计特点：加厚黄铜镀镍配合三元乙丙橡胶制成，

多爪式防磁波片设计，紫铜材质制成，具有防电

磁干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配扁形密封垫片

LAND 蓝江

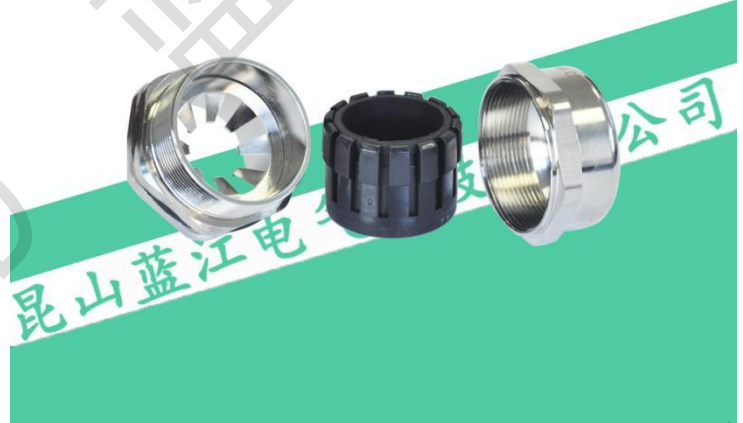

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Thick brass plated with nickel and made of EPDM rubber, with a multi claw anti magnetic wave plate design and made of purple copper material. It has the characteristics of anti electromagnetic interference, high protection level, and strong tensile strength

Ordering Tips: Default without nut, equipped with flat sealing gasket



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EMC-MG12A-08	M12×1.5	12	4~8	8	17/17	50
EMC-MG12A-05	M12×1.5	12	3~5	8	17/17	50
EMC-MG16AS-08	M16×1.5	16	4~8	8	18/18	50
EMC-MG16A-10	M16×1.5	16	6~10	9	22/22	50
EMC-MG16A-07	M16×1.5	16	4~7	9	22/22	50
EMC-MG20A-14	M20×1.5	20	8~14	10	26/26	50
EMC-MG20AS-12	M20×1.5	20	7~12	10	24/24	50
EMC-MG20AS-09	M20×1.5	20	5~9	10	24/24	50
EMC-MG25A-18	M25×1.5	25	13~18	12	32/32	50
EMC-MG25A-16	M25×1.5	25	11~16	12	32/32	50
EMC-MG32A-25	M32×1.5	32	18~25	12.5	40/40	20
EMC-MG32A-22	M32×1.5	32	16~22	12.5	40/40	20
EMC-MG40A-31	M40×1.5	40	24~31	15	50/50	10
EMC-MG40A-25	M40×1.5	40	18~25	15	50/50	10
EMC-MG50A-41	M50×1.5	50	33~41	15	59/59	10
EMC-MG50A-33	M50×1.5	50	25~33	15	59/59	10
EMC-MG63A-51	M63×1.5	63	46~51	15	73/73	10
EMC-MG63A-46	M63×1.5	63	40~46	15	73/73	10
EMC-PG7A-08	PG7	12.5	4~8	8	17/17	50
EMC-PG9A-08	PG9	15.2	4~8	8	18/18	50
EMC-PG11A-10	PG11	18.6	6~10	9	22/22	50
EMC-PG11A-07	PG11	18.6	4~7	9	22/22	50
EMC-PG13.5A-12	PG13.5	20.4	7~12	9.5	24/24	50
EMC-PG13.5A-09	PG13.5	20.4	5~9	9.5	24/24	50
EMC-PG16A-14	PG16	22.5	8~14	10	26/26	50
EMC-PG16A-11	PG16	22.5	6~11	10	26/26	50
EMC-PG21A-18	PG21	28.3	13~18	12	32/32	50
EMC-PG21A-16	PG21	28.3	11~16	12	32/32	50
EMC-PG29A-25	PG29	37	18~25	12.5	40/40	20
EMC-PG29A-22	PG29	37	16~22	12.5	40/40	20
EMC-PG36A-30	PG36	47	24~30	15	50/50	10
EMC-PG36A-25	PG36	47	18~25	15	50/50	10
EMC-PG42A-40	PG42	54	33~40	15	59/59	10
EMC-PG42A-33	PG42	54	25~33	15	59/59	10
EMC-PG48A-51	PG48	59.3	44~51	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
EMC-G1/4A-08	G1/4	13.15	4~8	8	17/17	50
EMC-G1/4A-05	G1/4	13.15	3~5	8	17/17	50
EMC-G3/8A-10	G3/8	16.66	6~10	9	22/22	50
EMC-G3/8A-07	G3/8	16.66	4~7	9	22/22	50
EMC-G1/2A-12	G1/2	20.95	7~12	9.5	24/24	50
EMC-G1/2A-09	G1/2	20.95	5~9	9.5	24/24	50
EMC-G1/2A-14	G1/2	20.95	8~14	10	26/26	50
EMC-G3/4A-18	G3/4	26.66	13~18	12	32/32	50
EMC-G3/4A-16	G3/4	26.66	11~16	12	32/32	50
EMC-G1A-25	G1	33.2	18~25	12.5	40/40	20
EMC-G1A-22	G1	33.2	16~22	12.5	40/40	20
EMC-G1-1/4A-31	G1-1/4	41.9	24~31	15	50/50	10
EMC-G1-1/4A-25	G1-1/4	41.9	18~25	15	50/50	10
EMC-G1-1/2A-41	G1-1/2	47.8	33~41	15	59/59	10
EMC-G1-1/2A-33	G1-1/2	47.8	25~33	15	59/59	10
EMC-G2A-51	G2	59.6	44~51	15	68/68	10
EMC-G2A-46	G2	59.6	39~46	15	68/68	10
EMC-NPT1/4A-08	NPT1/4	13.15	4~8	8	17	50
EMC-NPT1/4A-05	NPT1/4	13.15	3~5	8	17	50
EMC-NPT3/8A-10	NPT3/8	16.66	6~10	9	22	50
EMC-NPT3/8A-07	NPT3/8	16.66	4~7	9	22	50
EMC-NPT1/2A-12	NPT1/2	20.95	7~12	9.5	24	50
EMC-NPT1/2A-09	NPT1/2	20.95	5~9	9.5	24	50
EMC-NPT1/2A-14	NPT1/2	20.95	8~14	10	26	50
EMC-NPT3/4A-18	NPT3/4	26.66	13~18	12	32	50
EMC-NPT3/4A-16	NPT3/4	26.66	11~16	12	32	50
EMC-NPT1A-25	NPT1	33.2	18~25	12.5	40	20
EMC-NPT1A-22	NPT1	33.2	16~22	12.5	40	20
EMC-NPT1-1/4A-31	NPT1-1/4	41.9	24~31	15	50	10
EMC-NPT1-1/4A-25	NPT1-1/4	41.9	18~25	15	50	10
EMC-NPT1-1/2A-41	NPT1-1/2	47.8	33~41	15	59	10
EMC-NPT1-1/2A-33	NPT1-1/2	47.8	25~33	15	59	10
EMC-NPT2A-51	NPT2	59.6	44~51	15	68	10
EMC-NPT2A-46	NPT2	59.6	39~46	15	68	10

B-EMC防磁波铜镀镍电缆防水接头

B-EMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙


产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：采用黄铜镀镍，硅胶与尼龙夹紧爪制成，多爪式防磁波片设计，紫铜材质制成，具有防电磁干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配O型密封圈

LAND 蓝江

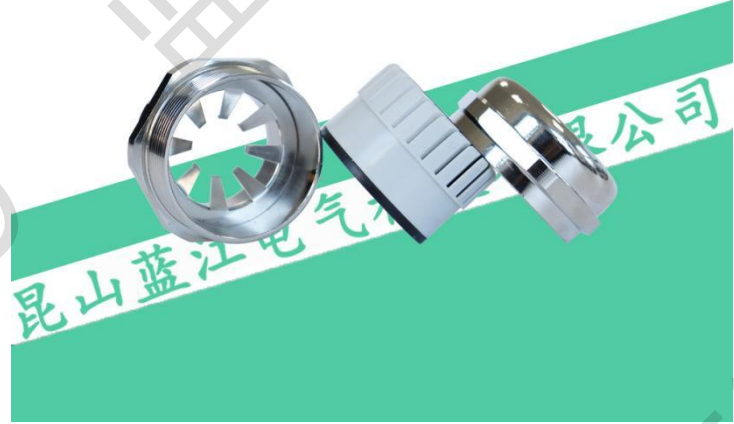

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of brass nickel plating, silicone and nylon clamping claws, multi claw anti magnetic wave plate design, made of purple copper material, with characteristics of anti electromagnetic interference, high protection level, strong tensile strength, etc

Ordering Tips: Default without nut, equipped with O-ring seal



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG10B-06	M10×1.5	10	3~6.5	6	14/14	100
EMC-MG12B-06	M12×1.5	12	3~6.5	6	14/14	100
EMC-MG12B-08	M12×1.5	14	4~8	6	14/16	100
EMC-MG14B-08	M14×1.5	14	4~8	7	17/17	100
EMC-MG16B-08	M16×1.5	16	4~8	7	17/18	100
EMC-MG16B-10	M16×1.5	16	5~10	7	20/20	100
EMC-MG18B-10	M18×1.5	18	5~10	7	20/20	100
EMC-MG20B-08	M20×1.5	20	4~8	8	17/22	100
EMC-MG20B-10	M20×1.5	20	5~10	8	20/22	100
EMC-MG20B-12	M20×1.5	20	6~12	8	22/22	100
EMC-MG20B-14	M20×1.5	20	8~14	8	24/24	100
EMC-MG22B-14	M22×1.5	22	8~14	8	24/24	100
EMC-MG24B-14	M24×1.5	24	8~14	8	24/27	100
EMC-MG25B-14	M25×1.5	25	8~14	8	24/27	50
EMC-MG25B-16	M25×1.5	25	10~16	8	27/27	50
EMC-MG25B-18	M25×1.5	25	13~18	8	30/30	50
EMC-MG27B-18	M27×2.0	27	13~18	8	30/30	50
EMC-MG30B-18	M30×2.0	30	13~18	8	30/32	50
EMC-MG30B-20	M30×2.0	30	15~20	8	30/32	50
EMC-MG32B-18	M32×1.5	32	13~18	9	34	50
EMC-MG32B-22	M32×1.5	32	15~22	9	34/34	50
EMC-MG32B-25	M32×1.5	32	18~25	9	40/40	50
EMC-MG33B-22	M33×2.0	33	15~22	9	34/36	50
EMC-MG36B-25	M36×2.0	36	18~25	9	40/40	50
EMC-MG40B-25	M40×1.5	40	18~25	9	40/43	20
EMC-MG40B-28	M40×1.5	40	20~28	10	43/43	20
EMC-MG40B-30	M40×1.5	40	22~30	10	45/45	20
EMC-MG40B-32	M40×1.5	40	24~32	10	50/50	20
EMC-MG42B-28	M42×2.0	42	20~28	10	50/50	20
EMC-MG48B-32	M48×2.0	48	24~32	10	50/52	20
EMC-MG50B-32	M50×1.5	50	24~32	10	57/55	10
EMC-MG50B-38	M50×1.5	50	30~38	10	57/55	10
EMC-MG60B-44	M60×2.0	60	37~44	12	64/64	10
EMC-MG63B-44	M63×1.5	63	37~44	12	64/68	10
EMC-MG64B-44	M64×2.0	64	37~44	12	64/68	10

产品参数表/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-PG7B-06	PG7	12.5	3~6.5	6	14/14	100
EMC-PG7B-08	PG7	12.5	4~8	7	14/14	100
EMC-PG9B-08	PG9	15.2	4~8	7	17/17	100
EMC-PG11B-10	PG11	18.6	5~10	7	20/20	100
EMC-PG13.5B-12	PG13.5	20.4	6~12	7	22/22	100
EMC-PG16B-14	PG16	22.5	8~14	8	24/24	100
EMC-PG19B-14	PG19	23.8	8~14	8	24/27	100
EMC-PG21B-18	PG21	28.3	13~18	8	30/30	50
EMC-PG25B-22	PG25	30	16~22	8	30/32	50
EMC-PG29B-25	PG29	37	18~25	9	40/40	20
EMC-PG36B-32	PG36	47	24~32	10	50/50	20
EMC-PG42B-38	PG42	54	30~38	10	58/58	10
EMC-PG48B-44	PG48	59.3	37~44	12	64/64	10
EMC-G1/4B-06	G1/4	13.15	3~6.5	6	14/16	100
EMC-G1/4B-08	G1/4	13.15	4~8	6	14/16	100
EMC-G3/8B-08	G3/8	16.65	4~8	7	17/18	100
EMC-G1/2B-12	G1/2	20.95	6~12	8	22/22	100
EMC-G3/4B-18	G3/4	26.44	13~18	8	30/30	100
EMC-G1B-22	G1	33.24	16~22	9	34/36	20
EMC-G1-1/4B-28	G1-1/4	41.91	22~28	10	43/45	20
EMC-G1-1/4B-30	G1-1/4	41.91	23~30	10	45/45	20
EMC-G1-1/2B-32	G1-1/2	47.80	25~32	10	50/52	10
EMC-G2B-44	G2	59.61	37~44	12	64/64	10
EMC-NPT1/4B-06	NPT1/4	13.15	3~6.5	6	14/16	100
EMC-NPT1/4B-08	NPT1/4	13.15	4~8	6	14/16	100
EMC-NPT3/8B-08	NPT3/8	16.65	4~8	7	17/18	100
EMC-NPT1/2B-12	NPT1/2	20.95	6~12	8	22/22	100
EMC-NPT3/4B-18	NPT3/4	26.44	13~18	8	30/30	50
EMC-NPT1B-22	NPT1	33.24	16~22	9	34/36	20
EMC-NPT1-1/4B-28	NPT1-1/4	41.91	22~28	10	43/45	20
EMC-NPT1-1/4B-30	NPT1-1/4	41.91	23~30	10	45/45	20
EMC-NPT1-1/2B-32	NPT1-1/2	47.80	25~32	10	50/52	10
EMC-NPT2B-44	NPT2	59.61	37~44	12	64/64	10

HEMC新能源防磁波铜镀镍电缆接头

HEMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍


螺纹规格：公制M牙

产品特性：符合CE， IP68

温度测试：-40℃～105℃， 短时可达120℃

设计特点：黄镀镍配合改性橡胶制成， 弹簧防磁波设计， 具有防电磁干扰， 防护等级高， 抗拉力强等特性

订购说明：默认不附螺母， 配O型密封圈

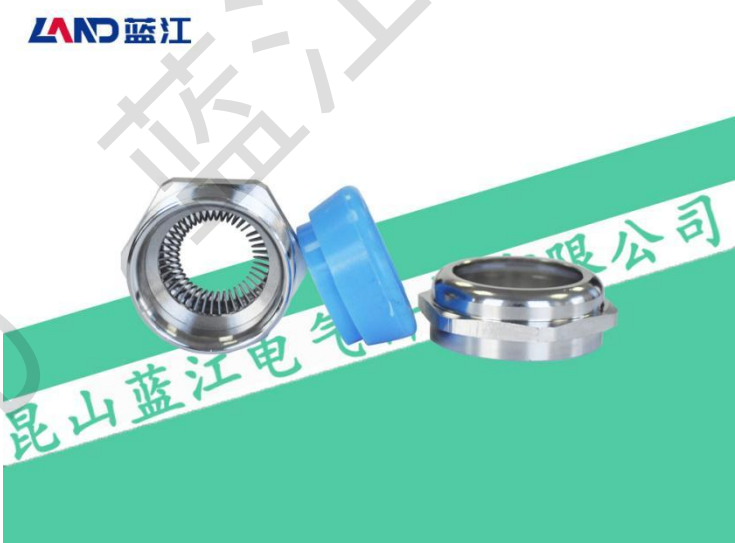

Product materials: Nickel Plated Brass

Thread Standard: Metric thread

Product Features: Compliant with CE, IP68

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of yellow nickel plating combined with modified rubber, with a spring anti magnetic wave design, it has the characteristics of anti electromagnetic interference, high protection level, and strong tensile strength

Ordering Tips: Default without nut, equipped with O-ring seal

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
HEMC-MG20-14	M20×1.5	20	8~14	7	24/24	50
HEMC-MG25-18	M25×1.5	25	13~18	9	30/30	50
HEMC-MG32-24	M32×1.5	32	18~24	11	36/36	20
HEMC-MG40-35	M40×1.5	40	28~35	11	50/46	10
HEMC-MG50-38	M50×1.5	50	30~38	12	57/55	10

T-EMC防磁波铜镀镍电缆防水接头

T-EMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍


螺纹规格：公制M牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

设计特点：弹片式防磁波片设计，紫铜材质制成，具有防电磁干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配O型密封圈

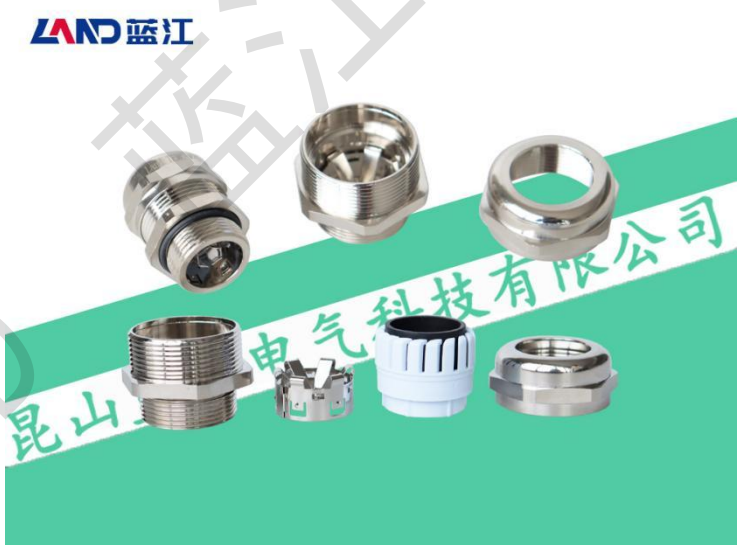

Product materials: Nickel Plated Brass

Thread Standard: Metric thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Shrapnel type anti magnetic wave plate design, made of purple copper material, anti electromagnetic interference

Ordering Tips: Default without nut, equipped with O-ring seal

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
TEMC-M16-10	M16×1.5	16	5～10	7	20/20	50
TEMC-M20-12	M20×1.5	20	6～12	7	22/22	50
TEMC-M20-14	M20×1.5	20	8～14	7	24/24	50
TEMC-M25-16	M25×1.5	25	10～16	8	27/27	50
TEMC-M25-18	M25×1.5	25	13～18	8	30/30	50
TEMC-M32-22	M32×1.5	32	15～22	9	34/34	20
TEMC-M32-25	M32×1.5	32	18～25	9	40/40	20

KEMC铠装防磁波铜镀镍电缆接头

KEMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：铠装式防磁波片设计，紫铜材质制成，具有防电磁干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配扁形密封垫片，部分型号需要定制

LAND 蓝江



Product materials: Nickel Plated Brass



Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: armor anti magnetic wave plate design, made of purple copper material, anti electromagnetic interference

Ordering Tips: Default without nut, equipped with flat sealing gasket, Some models require customization

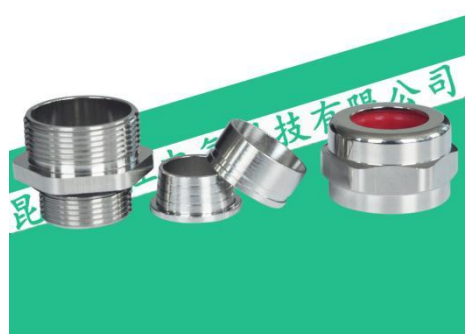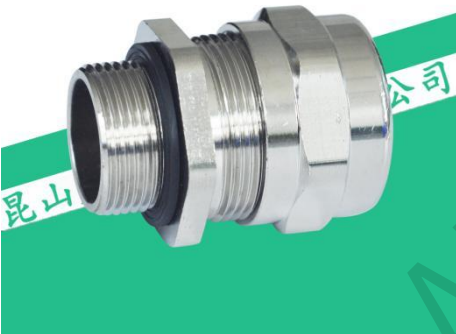

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	PCS
KEMC-M16-10	M16×1.5	16	6~10	9	50
KEMC-M20-14	M20×1.5	20	8~14	10	50
KEMC-M20-16	M20×1.5	20	11~16	10	50
KEMC-M20-18	M20×1.5	20	13~18	10	50
KEMC-M20-20	M20×1.5	20	15~20	10	50
KEMC-M25-14	M25×1.5	25	8~14	12	20
KEMC-M25-18	M25×1.5	25	13~18	12	20
KEMC-M25-21	M25×1.5	25	16~21	12	20
KEMC-M32-25	M32×1.5	32	18~25	12	10
KEMC-M32-28	M32×1.5	32	20~28	12	10
KEMC-M40-35	M40×1.5	40	26~35	15	10
KEMC-M50-41	M50×1.5	50	34~41	15	5
KEMC-M63-50	M63×1.5	63	40~50	18	1
KEMC-G1/2-14	G1/2	20.99	8~14	10	50
KEMC-G1/2-18	G1/2	20.99	13~18	10	50
KEMC-G1/2-21	G1/2	20.99	16~21	10	50
KEMC-G3/4-18	G3/4	26.44	13~18	12	20
KEMC-G3/4-21	G3/4	26.44	16~21	12	20
KEMC-G1-25	G1	33.25	18~25	12	10
KEMC-G1-28	G1	33.25	20~28	12	10
KEMC-G1-1/4-35	G1-1/4	41.91	26~35	15	10
KEMC-G1-1/2-41	G1-1/2	47.8	34~41	15	5
KEMC-G2-50	G2	59.61	40~50	18	1
KEMC-G2-55	G2	59.61	43~55	18	1
KEMC-NPT1/2-14	NPT1/2	20.99	8~14	10	50
KEMC-NPT1/2-18	NPT1/2	20.99	13~18	10	50
KEMC-NPT1/2-21	NPT1/2	20.99	16~21	10	50
KEMC-NPT3/4-18	NPT3/4	26.44	13~18	12	20
KEMC-NPT3/4-21	NPT3/4	26.44	16~21	12	20
KEMC-NPT1-25	NPT1	33.25	18~25	12	10
KEMC-NPT1-28	NPT1	33.25	20~28	12	10
KEMC-NPT1-1/4-35	NPT1-1/4	41.91	26~35	15	10
KEMC-NPT1-1/2-41	NPT1-1/2	47.8	34~41	15	5
KEMC-NPT2-50	NPT2	59.61	40~50	18	1

扁孔型铜镀镍电缆防水接头

Flat hole Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：加厚黄铜镀镍配合三元乙丙橡胶制成，扁


形密封圈分体设计，防护等级高，抗拉力强，适用于

各类扁电缆线及伴热带锁紧密封

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，配扁形密封垫片

LAND 蓝江

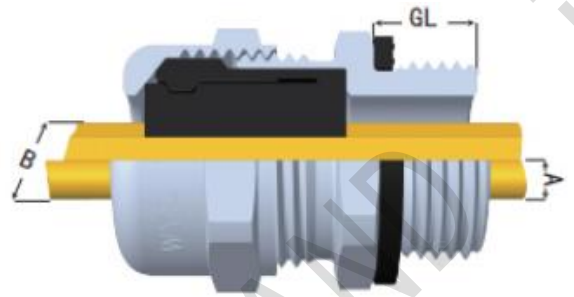

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Thick brass plated with nickel and made of EPDM rubber, with a flat sealing ring split design, high protection level, strong tensile strength, suitable for locking and sealing various flat cables and heat tracing belts

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
MG18A-0410	M18×1.5	18	4*10	9	26/26	50
MG18A-0814	M18×1.5	18	8*14	9	26/26	50
MG20AS-0508	M20×1.5	20	5*8	10	24/24	50
MG20AS-0712	M20×1.5	20	7*12	10	24/24	50
MG20A-0410	M20×1.5	20	4*10	10	26/26	50
MG20A-0814	M20×1.5	20	8*14	10	26/26	50
MG25A-0614	M25×1.5	25	7*14	12	32/32	50
MG32A-0519	M32×1.5	32	5*19	12.5	40/40	20
MG40A-1230	M40×1.5	40	12*30	15	50/50	10
MG40A-1232	M40×1.5	40	12*32	15	50/50	10
MG50A-1334	M50×1.5	50	13*34	15	59/59	10
MG63A-1642	M63×1.5	63	16*42	15	70/70	10
MG63A-2055	M63×1.5	63	20*55	15	70/70	10
PG13.5A-0508	PG13.5	20	5*8	10	24/24	50
PG13.5A-0712	PG13.5	20	7*12	10	24/24	50
PG16A-0410	PG16	20	4*10	10	26/26	50
PG16A-0814	PG16	20	8*14	10	26/26	50
PG21A-0614	PG21	25	7*14	12	32/32	50
PG29A-0519	PG29	32	5*19	12.5	40/40	20
PG36A-1230	PG36	40	12*30	15	50/50	10
PG36A-1232	PG36	40	12*32	15	50/50	10
PG42A-1334	PG42	50	13*34	15	59/59	10
PG48A-1642	PG48	63	16*42	15	70/70	10
PG48A-2055	PG48	63	20*55	15	70/70	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
G1/2A-0508	G1/2	20	5*8	10	24/24	50
G1/2A-0712	G1/2	20	7*12	10	24/24	50
G1/2A-0410	G1/2	20	4*10	10	26/26	50
G1/2A-0814	G1/2	20	8*14	10	26/26	50
G3/4A-0614	G3/4	25	7*14	12	32/32	50
G1A-0519	G1	32	5*19	12.5	40/40	20
G1-1/4A-1230	G1-1/4	40	12*30	15	50/50	10
G1-1/4A-1232	G1-1/4	40	12*32	15	50/50	10
G1-1/2A-1334	G1-1/2	50	13*34	15	59/59	10
G2A-1642	G2	63	16*42	15	70/70	10
G2A-2055	G2	63	20*55	15	70/70	10
NPT1/2A-0508	NPT1/2	20	5*8	10	24/24	50
NPT1/2A-0712	NPT1/2	20	7*12	10	24/24	50
NPT1/2A-0410	NPT1/2	20	4*10	10	26/26	50
NPT1/2A-0814	NPT1/2	20	8*14	10	26/26	50
NPT3/4A-0614	NPT3/4	25	7*14	12	32/32	50
NPT1A-0519	NPT1	32	5*19	12.5	40/40	20
NPT1-1/4A-1230	NPT1-1/4	40	12*30	15	50/50	10
NPT1-1/4A-1232	NPT1-1/4	40	12*32	15	50/50	10
NPT1-1/2A-1334	NPT1-1/2	50	13*34	15	59/59	10
NPT2A-1642	NPT2	63	16*42	15	70/70	10
NPT2A-2055	NPT2	63	20*55	15	70/70	10

二孔型铜镀镍电缆防水接头

Two holes Nickel Plated Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,


多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

LAND 蓝江

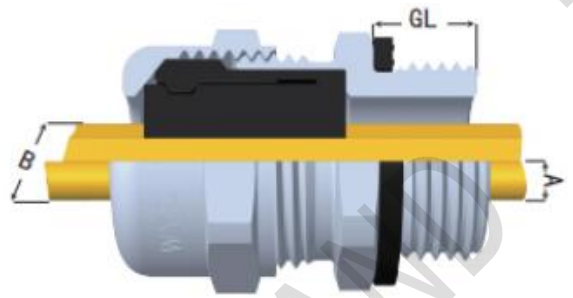

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H2-03	M12×1.5	12	1.5~3	8	17/17	50
MG16AS-H2-03	M16×1.5	16	1.5~3	8	18/18	50
MG16A-H2-02	M16×1.5	16	1.5~2.6	9	22/22	50
MG16A-H2-04	M16×1.5	16	2~4	9	22/22	50
MG18A-H2-02	M18×1.5	18	1.5~2.6	9	22/22	50
MG18A-H2-04	M18×1.5	18	2~4	9	22/22	50
MG18A-H2-06	M18×1.5	18	3~6	9.5	26/26	50
MG20AS-H2-05	M20×1.5	20	2~5	10	24/24	50
MG20A-H2-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H2-04	M20×1.5	20	2~4	10	26/26	50
MG20A-H2-05	M20×1.5	20	2~5	10	26/26	50
MG20A-H2-06	M20×1.5	20	3~6	10	26/26	50
MG20A-H2-07	M20×1.5	20	4~7	10	26/26	50
MG22A-H2-03	M22×1.5	22	1.5~3	10	26/26	50
MG22A-H2-04	M22×1.5	22	2~4	10	26/26	50
MG22A-H2-05	M22×1.5	22	2~5	10	26/26	50
MG22A-H2-06	M22×1.5	22	3~6	10	26/26	50
MG22A-H2-07	M22×1.5	22	4~7	10	26/26	50
MG25A-H2-05	M25×1.5	25	3~5.5	12	32/32	50
MG25A-H2-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H2-08	M25×1.5	25	5~8	12	32/32	50
MG25A-H2-09	M25×1.5	25	6~9	12	32/32	50
MG32A-H2-10	M32×1.5	32	6~10	12.5	40/40	20
MG32A-H2-12	M32×1.5	32	9~12	12.5	40/40	20
MG40A-H2-13	M40×1.5	40	9~13	15	50/50	10
MG50A-H2-15	M50×1.5	50	11~15	15	59/59	10
MG63A-H2-17	M63×1.5	63	14~17	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	cap mm	pcs
PG7A-H2-03	PG7	12.5	1.5~3	8	17/17	50
PG9A-H2-03	PG9	15.2	1.5~3	8	18/18	50
PG11A-H2-02	PG11	18.6	1.5~2.6	9	22/22	50
PG11A-H2-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-H2-05	PG13.5	20.4	2~5	9.5	24/24	50
PG16A-H2-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H2-04	PG16	22.5	2~4	10	26/26	50
PG16A-H2-05	PG16	22.5	2~5	10	26/26	50
PG16A-H2-06	PG16	22.5	3~6	10	26/26	50
PG16A-H2-07	PG16	22.5	4~7	10	26/26	50
PG19A-H2-03	PG19	23.8	1.5~3	10	26/26	50
PG19A-H2-04	PG19	23.8	2~4	10	26/26	50
PG19A-H2-05	PG19	23.8	2~5	10	26/26	50
PG19A-H2-06	PG19	23.8	3~6	10	26/26	50
PG19A-H2-07	PG19	23.8	4~7	10	26/26	50
PG21A-H2-05	PG21	28.3	3~5.5	12	32/32	50
PG21A-H2-06	PG21	28.3	3~6	12	32/32	50
PG21A-H2-08	PG21	28.3	5~8	12	32/32	50
PG21A-H2-09	PG21	28.3	6~9	12	32/32	50
PG25A-H2-05	PG25	29.8	3~5.5	12	32/32	50
PG25A-H2-06	PG25	29.8	3~6	12	32/32	50
PG25A-H2-08	PG25	29.8	5~8	12	32/32	50
PG25A-H2-09	PG25	29.8	6~9	12	32/32	50
PG29A-H2-10	PG29	37	6~10	12.5	40/40	20
PG29A-H2-12	PG29	37	9~12	12.5	40/40	20
PG36A-H2-13	PG36	47	9~13	15	50/50	10
PG42A-H2-15	PG42	54	11~15	15	59/59	10
PG48A-H2-17	PG48	59.3	14~17	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H2-03	G1/4	13.15	1.5~3	8	17/17	50
G3/8A-H2-04	G3/8	16.66	2~4	9	22/22	50
G1/2AS-H2-05	G1/2	20.95	2~5	9.5	24/24	50
G1/2A-H2-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H2-04	G1/2	20.95	2~4	10	26/26	50
G1/2A-H2-05	G1/2	20.95	2~5	10	26/26	50
G1/2A-H2-06	G1/2	20.95	3~6	10	26/26	50
G1/2A-H2-07	G1/2	20.95	4~7	10	26/26	50
G3/4A-H2-05	G3/4	26.66	3~5.5	12	32/32	50
G3/4A-H2-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H2-08	G3/4	26.66	5~8	12	32/32	50
G3/4A-H2-09	G3/4	26.66	6~9	12	32/32	50
G1A-H2-10	G1	33.2	6~10	12.5	40/40	20
G1A-H2-12	G1	33.2	9~12	12.5	40/40	20
G1-1/4A-H2-13	G1-1/4	41.9	9~13	15	50/50	10
G1-1/2A-H2-15	G1-1/2	47.8	11~15	15	59/59	10
G2A-H2-17	G2	59.6	14~17	15	68/68	10
NPT1/4A-H2-03	NPT1/4	13.15	1.5~3	8	17/17	50
NPT3/8A-H2-04	NPT3/8	16.66	2~4	9	22/22	50
NPT1/2AS-H2-05	NPT1/2	20.95	2~5	9.5	24/24	50
NPT1/2A-H2-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H2-04	NPT1/2	20.95	2~4	10	26/26	50
NPT1/2A-H2-05	NPT1/2	20.95	2~5	10	26/26	50
NPT1/2A-H2-06	NPT1/2	20.95	3~6	10	26/26	50
NPT1/2A-H2-07	NPT1/2	20.95	4~7	10	26/26	50
NPT3/4A-H2-05	NPT3/4	26.66	3~5.5	12	32/32	50
NPT3/4A-H2-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H2-08	NPT3/4	26.66	5~8	12	32/32	50
NPT3/4A-H2-09	NPT3/4	26.66	6~9	12	32/32	50
NPT1A-H2-10	NPT1	33.2	6~10	12.5	40/40	20
NPT1A-H2-12	NPT1	33.2	9~12	12.5	40/40	20
NPT1-1/4A-H2-13	NPT1-1/4	41.9	9~13	15	50/50	10
NPT1-1/2A-H2-15	NPT1-1/2	47.8	11~15	15	59/59	10
NPT2A-H2-17	NPT2	59.6	14~17	15	68/68	10

三孔型铜镀镍电缆防水接头

Three holes Nickel Plated Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,


多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

LAND 蓝江

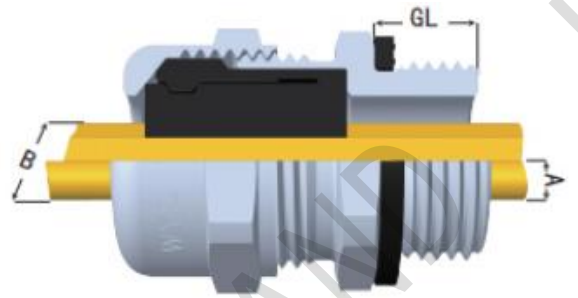

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H3-02	M12×1.5	12	1~2.6	8	17/17	50
MG16AS-H3-02	M16×1.5	16	1~2.6	8	18/18	50
MG16A-H3-03	M16×1.5	16	1.5~3	9	22/22	50
MG16A-H3-04	M16×1.5	16	2~4	9	22/22	50
MG18A-H3-03	M18×1.5	18	1.5~3	9	22/22	50
MG18A-H3-04	M18×1.5	18	2~4	9	22/22	50
MG18A-H3-03	M18×1.5	18	1.5~3	9.5	26/26	50
MG18A-H3-05	M18×1.5	18	2~5	9.5	26/26	50
MG18A-H3-06	M18×1.5	18	3~6	9.5	26/26	50
MG20AS-H3-05	M20×1.5	20	2~5	10	24/24	50
MG20A-H3-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H3-05	M20×1.5	20	2~5	10	26/26	50
MG20A-H3-06	M20×1.5	20	3~6	10	26/26	50
MG22A-H3-03	M22×1.5	22	1.5~3	10	26/26	50
MG22A-H3-05	M22×1.5	22	2~5	10	26/26	50
MG22A-H3-06	M22×1.5	22	3~6	10	26/26	50
MG25A-H3-05	M25×1.5	25	2~5	12	32/32	50
MG25A-H3-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H3-07	M25×1.5	25	4~7	12	32/32	50
MG25A-H3-08	M25×1.5	25	5~8	12	32/32	50
MG32A-H3-10	M32×1.5	32	6~10	12.5	40/40	20
MG40A-H3-11	M40×1.5	40	8~11	15	50/50	10
MG40A-H3-13	M40×1.5	40	10~13	15	50/50	10
MG40A-H3-14	M40×1.5	40	11~14	15	50/50	10
MG50A-H3-12	M50×1.5	50	9~12	15	59/59	10
MG63A-H3-13	M63×1.5	63	9~13	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
PG7A-H3-02	PG7	12.5	1~2.6	8	17/17	50
PG9A-H3-02	PG9	15.2	1~2.3	8	18/18	50
PG11A-H3-03	PG11	18.6	1.5~3	9	22/22	50
PG11A-H3-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-H3-05	PG13.5	20.4	2~5	9.5	24/24	50
PG16A-H3-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H3-05	PG16	22.5	2~5	10	26/26	50
PG16A-H3-06	PG16	22.5	3~6	10	26/26	50
PG19A-H3-03	PG19	23.8	1.5~3	10	26/26	50
PG19A-H3-05	PG19	23.8	2~5	10	26/26	50
PG19A-H3-06	PG19	23.8	3~6	10	26/26	50
PG21A-H3-05	PG21	28.3	2~5	12	32/32	50
PG21A-H3-06	PG21	28.3	3~6	12	32/32	50
PG21A-H3-07	PG21	28.3	4~7	12	32/32	50
PG21A-H3-08	PG21	28.3	5~8	12	32/32	50
PG25A-H3-05	PG25	29.8	2~5	12	32/32	50
PG25A-H3-06	PG25	29.8	3~6	12	32/32	50
PG25A-H3-07	PG25	29.8	4~7	12	32/32	50
PG25A-H3-08	PG25	29.8	5~8	12	32/32	50
PG29A-H3-10	PG29	37	6~10	12.5	40/40	20
PG36A-H3-11	PG36	47	8~11	15	50/50	10
PG36A-H3-13	PG36	47	10~13	15	50/50	10
PG36A-H3-14	PG36	47	11~14	15	50/50	10
PG42A-H3-12	PG42	54	9~12	15	59/59	10
PG48A-H3-13	PG48	59.3	9~13	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H3-02	G1/4	13.15	1~2.6	8	17/17	50
G3/8A-H3-04	G3/8	16.66	2~4	9	22/22	50
G1/2AS-H3-05	G1/2	20.95	2~5	9.5	24/24	50
G1/2A-H3-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H3-05	G1/2	20.95	2~5	10	26/26	50
G1/2A-H3-06	G1/2	20.95	3~6	10	26/26	50
G3/4A-H3-05	G3/4	26.66	2~5	12	32/32	50
G3/4A-H3-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H3-07	G3/4	26.66	4~7	12	32/32	50
G3/4A-H3-08	G3/4	26.66	5~8	12	32/32	50
G1A-H3-10	G1	33.2	6~10	12.5	40/40	20
G1-1/4A-H3-11	G1-1/4	41.9	8~11	15	50/50	10
G1-1/4A-H3-13	G1-1/4	41.9	10~13	15	50/50	10
G1-1/4A-H3-14	G1-1/4	41.9	11~14	15	50/50	10
G1-1/2A-H3-12	G1-1/2	47.8	9~12	15	59/59	10
G2A-H3-13	G2	59.6	9~13	15	68/68	10
NPT1/4A-H3-02	NPT1/4	13.15	1~2.6	8	17/17	50
NPT3/8A-H3-04	NPT3/8	16.66	2~4	9	22/22	50
NPT1/2AS-H3-05	NPT1/2	20.95	2~5	9.5	24/24	50
NPT1/2A-H3-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H3-05	NPT1/2	20.95	2~5	10	26/26	50
NPT1/2A-H3-06	NPT1/2	20.95	3~6	10	26/26	50
NPT3/4A-H3-05	NPT3/4	26.66	2~5	12	32/32	50
NPT3/4A-H3-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H3-07	NPT3/4	26.66	4~7	12	32/32	50
NPT3/4A-H3-08	NPT3/4	26.66	5~8	12	32/32	50
NPT1A-H3-10	NPT1	33.2	6~10	12.5	40/40	20
NPT1-1/4A-H3-11	NPT1-1/4	41.9	8~11	15	50/50	10
NPT1-1/4A-H3-13	NPT1-1/4	41.9	10~13	15	50/50	10
NPT1-1/4A-H3-14	NPT1-1/4	41.9	11~14	15	50/50	10
NPT1-1/2A-H3-12	NPT1-1/2	47.8	9~12	15	59/59	10
NPT2A-H3-13	NPT2	59.6	9~13	15	68/68	10

四孔型铜镀镍电缆防水接头

Four holes Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃



设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，

多孔密封圈分体设计，防护等级高，抗拉力强，可以

同时锁紧多根电缆而保持密封状态

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，配扁形密封垫片

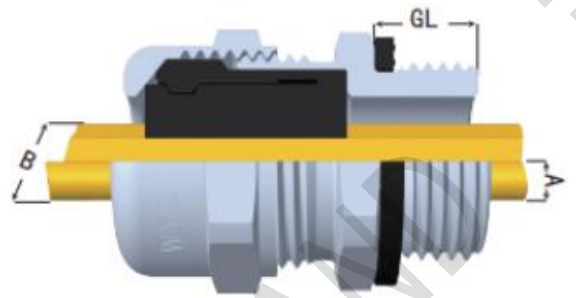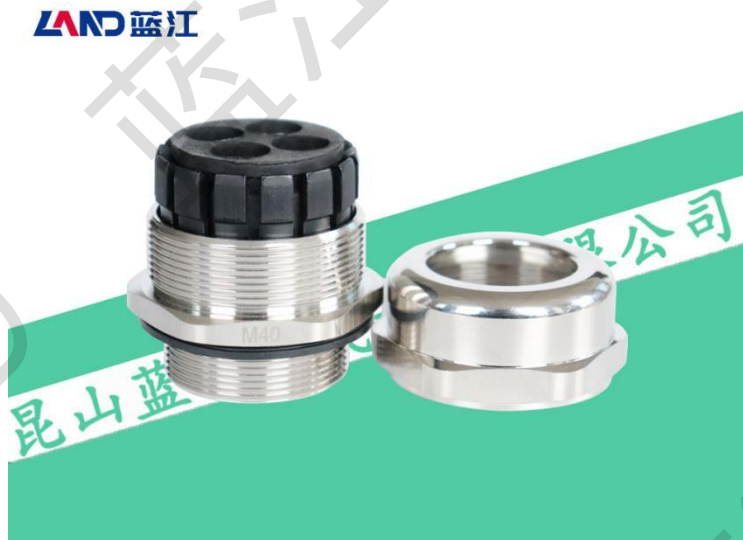

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H4-02	M12×1.5	12	1~2.3	8	17/17	50
MG16AS-H4-02	M16×1.5	16	1~2.3	8	18/18	50
MG16A-H4-03	M16×1.5	16	1.5~3	9	22/22	50
MG18A-H4-03	M18×1.5	18	1.5~3	9	22/22	50
MG18A-H4-05	M18×1.5	18	2~4.5	9.5	26/26	50
MG20AS-H4-04	M20×1.5	20	2~4	10	24/24	50
MG20A-H4-03	M20×1.5	20	1~2.5	10	26/26	50
MG20A-H4-04	M20×1.5	20	1.5~3.5	10	26/26	50
MG20A-H4-05	M20×1.5	20	2~4.5	10	26/26	50
MG25A-H4-05	M25×1.5	25	2~5	12	32/32	50
MG25A-H4-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H4-07	M25×1.5	25	4~7	12	32/32	50
MG25A-H4-08	M25×1.5	25	5~8	12	32/32	50
MG25A-H4-09	M25×1.5	25	6~9	12	32/32	50
MG32A-H4-07	M32×1.5	32	4~7	12.5	40/40	20
MG32A-H4-09	M32×1.5	32	6~9	12.5	40/40	20
MG40A-H4-11	M40×1.5	40	8~11	15	50/50	10
MG40A-H4-12	M40×1.5	40	9~12	15	50/50	10
PG7A-H4-02	PG7	12.5	1~2.3	8	17/17	50
PG9A-H4-02	PG9	15.2	1~2.3	8	18/18	50
PG11A-H4-03	PG11	18.6	1.5~3	9	22/22	50
PG13.5A-H4-04	PG13.5	20.4	2~4	9.5	24/24	50
PG16A-H4-03	PG16	22.5	1~2.5	10	26/26	50
PG16A-H4-04	PG16	22.5	1.5~3.5	10	26/26	50
PG16A-H4-05	PG16	22.5	2~4.5	10	26/26	50
PG21A-H4-05	PG21	28.3	2~5	12	32/32	50
PG21A-H4-06	PG21	28.3	3~6	12	32/32	50
PG21A-H4-07	PG21	28.3	4~7	12	32/32	50
PG21A-H4-08	PG21	28.3	5~8	12	32/32	50
PG21A-H4-09	PG21	28.3	6~9	12	32/32	50
PG29A-H4-07	PG29	37	4~7	12.5	40/40	20
PG29A-H4-09	PG29	37	6~9	12.5	40/40	20
PG36A-H4-11	PG36	47	8~11	15	50/50	10
PG36A-H4-12	PG36	47	9~12	15	50/50	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H4-02	G1/4	13.15	1~2.3	8	17/17	50
G3/8A-H4-03	G3/8	16.66	1.5~3	9	22/22	50
G1/2AS-H4-04	G1/2	20.95	2~4	9.5	24/24	50
G1/2A-H4-03	G1/2	20.95	1~2.5	10	26/26	50
G1/2A-H4-04	G1/2	20.95	1.5~3.5	10	26/26	50
G1/2A-H4-05	G1/2	20.95	2~4.5	10	26/26	50
G3/4A-H4-05	G3/4	26.66	2~5	12	32/32	50
G3/4A-H4-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H4-07	G3/4	26.66	4~7	12	32/32	50
G3/4A-H4-08	G3/4	26.66	5~8	12	32/32	50
G3/4A-H4-09	G3/4	26.66	6~9	12	32/32	50
G1A-H4-07	G1	33.2	4~7	12.5	40/40	20
G1A-H4-09	G1	33.2	6~9	12.5	40/40	20
G1-1/4A-H4-11	G1-1/4	41.9	8~11	15	50/50	10
G1-1/4A-H4-12	G1-1/4	41.9	9~12	15	50/50	10
NPT1/4A-H4-02	NPT1/4	13.15	1~2.3	8	17/17	50
NPT3/8A-H4-03	NPT3/8	16.66	1.5~3	9	22/22	50
NPT1/2AS-H4-04	NPT1/2	20.95	2~4	9.5	24/24	50
NPT1/2A-H4-03	NPT1/2	20.95	1~2.5	10	26/26	50
NPT1/2A-H4-04	NPT1/2	20.95	1.5~3.5	10	26/26	50
NPT1/2A-H4-05	NPT1/2	20.95	2~4.5	10	26/26	50
NPT3/4A-H4-05	NPT3/4	26.66	2~5	12	32/32	50
NPT3/4A-H4-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H4-07	NPT3/4	26.66	4~7	12	32/32	50
NPT3/4A-H4-08	NPT3/4	26.66	5~8	12	32/32	50
NPT3/4A-H4-09	NPT3/4	26.66	6~9	12	32/32	50
NPT1A-H4-07	NPT1	33.2	4~7	12.5	40/40	20
NPT1A-H4-09	NPT1	33.2	6~9	12.5	40/40	20
NPT1-1/4A-H4-11	NPT1-1/4	41.9	8~11	15	50/50	10
NPT1-1/4A-H4-12	NPT1-1/4	41.9	9~12	15	50/50	10

五孔型铜镀镍电缆防水接头

Five holes Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，


多孔密封圈分体设计，防护等级高，抗拉力强，可以

同时锁紧多根电缆而保持密封状态

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，配扁形密封垫片

LAND 蓝江

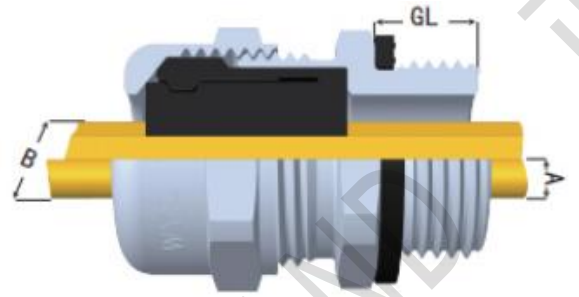

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG18A-H5-04	M18×1.5	18	2~4	9.5	26/26	50
MG20A-H5-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H5-04	M20×1.5	20	2~4	10	26/26	50
MG25A-H5-05	M25×1.5	25	3~5	12	32/32	50
MG25A-H5-06	M25×1.5	25	4~6	12	32/32	50
MG32A-H5-08	M32×1.5	32	5~8	12.5	40/40	20
MG40A-H5-08	M40×1.5	40	5~8	15	50/50	10
MG40A-H5-09	M40×1.5	40	6~9	15	50/50	10
PG16A-H5-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H5-04	PG16	22.5	2~4	10	26/26	50
PG21A-H5-05	PG21	28.3	3~5	12	32/32	50
PG21A-H5-06	PG21	28.3	4~6	12	32/32	50
PG29A-H5-08	PG29	37	5~8	12.5	40/40	20
PG36A-H5-08	PG36	47	5~8	15	50/50	10
PG36A-H5-09	PG36	47	6~9	15	50/50	10
G1/2A-H5-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H5-04	G1/2	20.95	2~4	10	26/26	50
G3/4A-H5-05	G3/4	26.66	3~5	12	32/32	50
G3/4A-H5-06	G3/4	26.66	4~6	12	32/32	50
G1A-H5-08	G1	33.2	5~8	12.5	40/40	20
G1-1/4A-H5-08	G1-1/4	41.9	5~8	15	50/50	10
G1-1/4A-H5-09	G1-1/4	41.9	6~9	15	50/50	10
NPT1/2A-H5-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H5-04	NPT1/2	20.95	2~4	10	26/26	50
NPT3/4A-H5-05	NPT3/4	26.66	3~5	12	32/32	50
NPT3/4A-H5-06	NPT3/4	26.66	4~6	12	32/32	50
NPT1A-H5-08	NPT1	33.2	5~8	12.5	40/40	20
NPT1-1/4A-H5-08	NPT1-1/4	41.9	5~8	15	50/50	10
NPT1-1/4A-H5-09	NPT1-1/4	41.9	6~9	15	50/50	10

六孔型铜镀镍电缆防水接头

Six holes Nickel Plated Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,



多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

LAND 蓝江

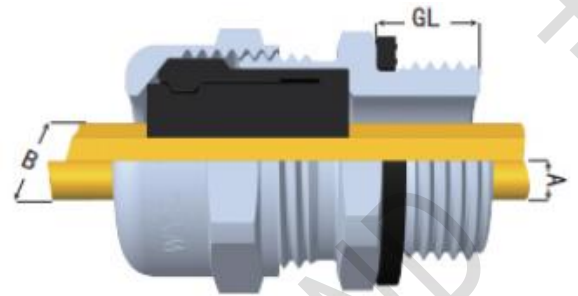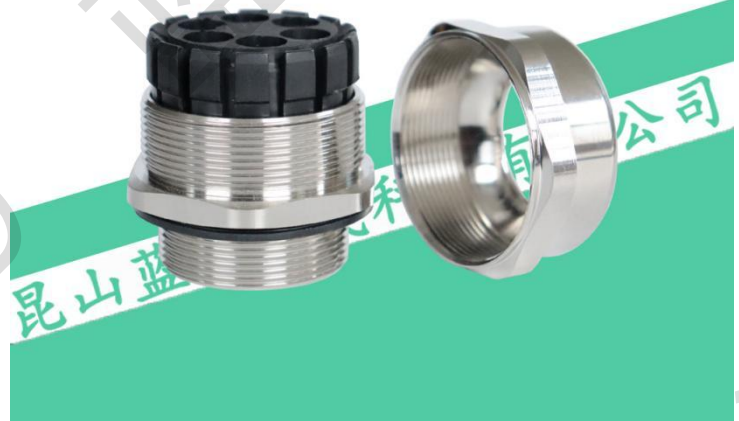

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG16A-H6-02	M16×1.5	16	1~2.1	9	22/22	50
MG18A-H6-04	M18×1.5	18	2~4	9.5	26/26	50
MG18A-H6-02	M18×1.5	18	1~2.1	9	22/22	50
MG20A-H6-03	M20×1.5	20	2~3.5	10	26/26	50
MG20A-H6-04	M20×1.5	20	2~4	10	26/26	50
MG25A-H6-05	M25×1.5	25	3~5	12	32/32	50
MG32A-H6-05	M32×1.5	32	3~5	12.5	40/40	20
MG32A-H6-07	M32×1.5	32	4~7	12.5	40/40	20
MG40A-H6-08	M40×1.5	40	5~8	15	50/50	10
MG63A-H6-12	M50×1.5	63	8~12	15	73/73	10
PG11A-H6-02	PG11	18.6	1~2.1	9	22/22	50
PG16A-H6-03	PG16	22.5	2~3.5	10	26/26	50
PG16A-H6-04	PG16	22.5	2~4	10	26/26	50
PG21A-H6-05	PG21	28.3	3~5	12	32/32	50
PG29A-H6-05	PG29	37	3~5	12.5	40/40	20
PG29A-H6-07	PG29	37	4~7	12.5	40/40	20
PG36A-H6-08	PG36	47	5~8	15	50/50	10
PG48A-H6-12	PG48	59.3	8~12	15	73/73	10
G3/8A-H6-02	G3/8	16.66	1~2.1	9	22/22	50
G1/2A-H6-03	G1/2	20.95	2~3.5	10	26/26	50
G1/2A-H6-04	G1/2	20.95	2~4	10	26/26	50
G3/4A-H6-05	G3/4	26.66	3~5	12	32/32	50
G1A-H6-05	G1	33.2	3~5	12.5	40/40	20
G1A-H6-07	G1	33.2	4~7	12.5	40/40	20
G1-1/4A-H6-08	G1-1/4	41.9	5~8	15	50/50	10
G2A-H6-12	G2	59.6	8~12	15	68/68	10
NPT3/8A-H6-02	NPT3/8	16.66	1~2.1	9	22/22	50
NPT1/2A-H6-03	NPT1/2	20.95	2~3.5	10	26/26	50
NPT1/2A-H6-04	NPT1/2	20.95	2~4	10	26/26	50
NPT3/4A-H6-05	NPT3/4	26.66	3~5	12	32/32	50
NPT1A-H6-05	NPT1	33.2	3~5	12.5	40/40	20
NPT1A-H6-07	NPT1	33.2	4~7	12.5	40/40	20
NPT1-1/4A-H6-08	NPT1-1/4	41.9	5~8	15	50/50	10
NPT2A-H6-12	NPT2	59.6	8~12	15	68/68	10

七孔型铜镀镍电缆防水接头

Seven holes Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃



设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，

多孔密封圈分体设计，防护等级高，抗拉力强，可以

同时锁紧多根电缆而保持密封状态

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，配扁形密封垫片

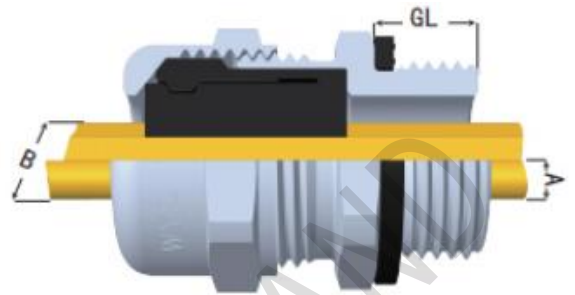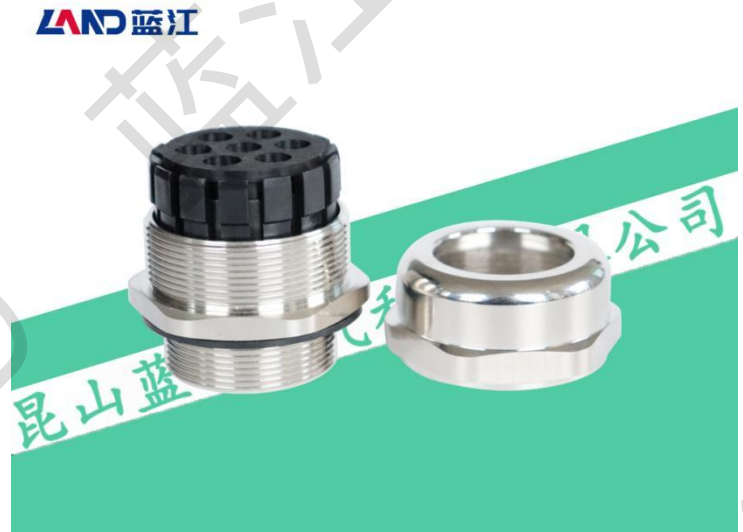

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

七孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG25A-H7-04	M25×1.5	25	2~4	12	32/32	50
MG32A-H7-06	M32×1.5	32	4~6	12.5	40/40	20
MG40A-H7-08	M40×1.5	40	5~8	15	50/50	10
PG21A-H7-04	PG21	28.3	2~4	12	32/32	50
PG29A-H7-06	PG29	37	4~6	12.5	40/40	20
PG36A-H7-08	PG36	47	5~8	15	50/50	10
G3/4A-H7-04	G3/4	26.66	2~4	12	32/32	50
G1A-H7-06	G1	33.2	4~6	12.5	40/40	20
G1-1/4A-H7-08	G1-1/4	41.9	5~8	15	50/50	10
NPT3/4A-H7-04	NPT3/4	26.66	2~4	12	32/32	50
NPT1A-H7-06	NPT1	33.2	4~6	12.5	40/40	20
NPT1-1/4A-H7-08	NPT1-1/4	41.9	5~8	15	50/50	10

八孔型铜镀镍电缆防水接头

Eight holes Nickel Plated Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,


多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

LAND 蓝江

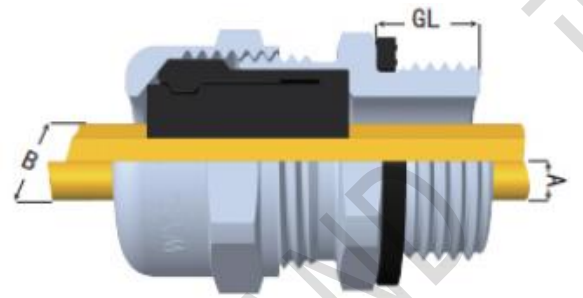

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket


八孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG16A-H8-02	M16×1.5	16	1~2.1	9	22/22	50
MG18A-H8-02	M18×1.5	18	1~2.1	9	22/22	50
MG25A-H8-04	M25×1.5	25	2~4	12	32/32	50
MG32A-H8-05	M32×1.5	32	3~5	12.5	40/40	20
MG40A-H8-04	M40×1.5	40	3~4	15	50/50	10
MG40A-H8-06	M40×1.5	40	4~6	15	50/50	10
PG11A-H8-02	PG11	18.6	1~2.1	9	22/22	50
PG21A-H8-04	PG21	28.3	2~4	12	32/32	50
PG29A-H8-05	PG29	37	3~5	12.5	40/40	20
PG36A-H8-04	PG36	47	3~4	15	50/50	10
PG36A-H8-06	PG36	47	4~6	15	50/50	10
G3/8A-H8-02	G3/8	16.66	1~2.1	9	22/22	50
G3/4A-H8-04	G3/4	26.66	2~4	12	32/32	50
G1A-H8-05	G1	33.2	3~5	12.5	40/40	20
G1-1/4A-H8-04	G1-1/4	41.9	3~4	15	50/50	10
G1-1/4A-H8-06	G1-1/4	41.9	4~6	15	50/50	10
NPT3/8A-H8-02	NPT3/8	16.66	1~2.1	9	22/22	50
NPT3/4A-H8-04	NPT3/4	26.66	2~4	12	32/32	50
NPT1A-H8-05	NPT1	33.2	3~5	12.5	40/40	20
NPT1-1/4A-H8-04	NPT1-1/4	41.9	3~4	15	50/50	10
NPT1-1/4A-H8-06	NPT1-1/4	41.9	4~6	15	50/50	10

九孔型铜镀镍电缆防水接头

Nine holes Nickel Plated Brass cable gland

- 产品材料：黄铜镀镍
- 螺纹规格：M牙，PG牙，G(PF)牙，NPT牙
- 产品特性：符合CE，IP68、UL94V-2
- 温度测试：-40℃~105℃，短时可达120℃
- 设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆而保持密封状态
- 订购说明：默认不附螺母，配扁形密封垫片

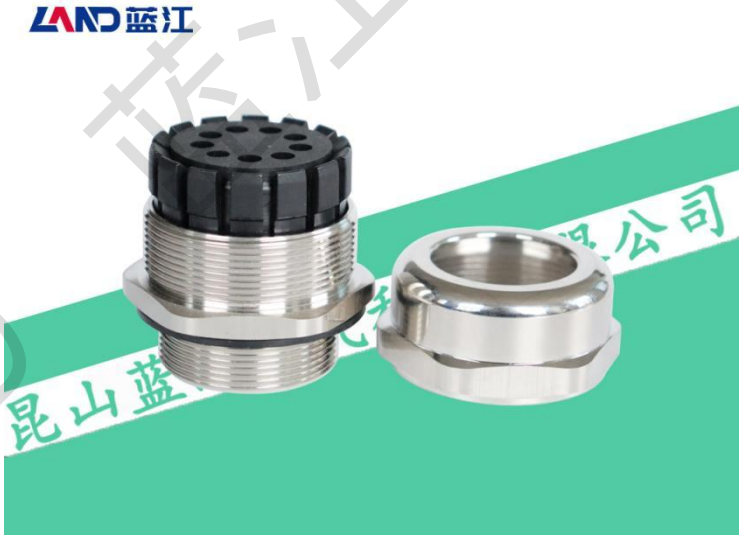

- Product materials:** Nickel Plated Brass
- Thread Standard:** Metric thread, PG thread, G thread, NPT thread
- Product Features:** Compliant with CE, IP68、UL94V-2
- Temperature test:** -40 ° C to 105 ° C, short-term 120 ° C
- Design Features:** Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state
- Ordering Tips:** Default without nut, equipped with flat sealing gasket


·九孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG40A-H9-05	M40×1.5	40	3~5	15	50/50	10
PG36A-H9-05	PG36	47	3~5	15	50/50	10
G1-1/4A-H9-05	G1-1/4	41.9	3~5	15	50/50	10
NPT1-1/4A-H9-05	NPT1-1/4	41.9	3~5	15	50/50	10

十孔型铜镀镍电缆防水接头

Ten holes Nickel Plated Brass cable gland

- 产品材料：黄铜镀镍
- 螺纹规格：M牙，PG牙，G(PF)牙，NPT牙
- 产品特性：符合CE，IP68、UL94V-2
- 温度测试：-40℃~105℃，短时可达120℃
- 设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆而保持密封状态
- 订购说明：默认不附螺母，配扁形密封垫片

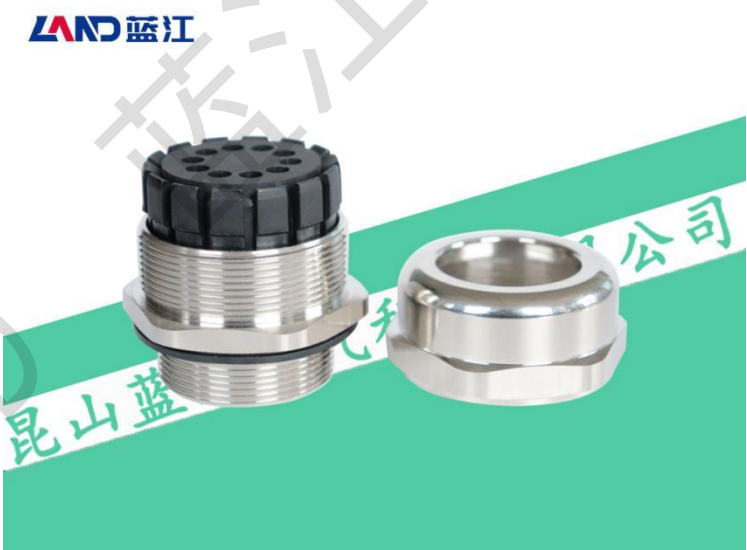

- Product materials: Nickel Plated Brass
- Thread Standard: Metric thread, PG thread, G thread, NPT thread
- Product Features: Compliant with CE, IP68、UL94V-2
- Temperature test: -40 ° C to 105 ° C, short-term 120 ° C
- Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state
- Ordering Tips: Default without nut, equipped with flat sealing gasket

·十孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	φ mm	φ mm	GL mm	cap mm	pcs
MG40A-H10-05	M40×1.5	40	3~5	15	50/50	10
PG36A-H10-05	PG36	47	3~5	15	50/50	10
G1-1/4A-H10-05	G1-1/4	41.9	3~5	15	50/50	10
NPT1-1/4A-H10-05	NPT1-1/4	41.9	3~5	15	50/50	10

双锁紧铜镀镍电缆防水接头

Double locking brass nickel plated cable gland

产品材料: 默认黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍配合三元乙丙橡胶及尼龙夹爪制成, 双层锁紧设计, 使其不紧能够有效密封电缆线, 还能锁紧电缆护套, 防护等级高, 抗拉力强

订购说明: NPT螺纹默认不附螺母, 配套O型密封圈, 部分型号需要定制, 具体交期咨询客户经理

Product materials: Nickel Plated Brass

Thread Standard: M、PG 、 G(PF) 、 NPT thread


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass nickel plated with EPDM rubber and nylon clamps, with a double-layer locking design that effectively seals the cable and locks the cable sheath. It has a high protection level and strong tensile strength

Ordering Tips: NPT thread does not come with a nut by default and comes with an O-ring seal. Some models require customization, please consult the customer manager for specific delivery time

LAND 蓝江

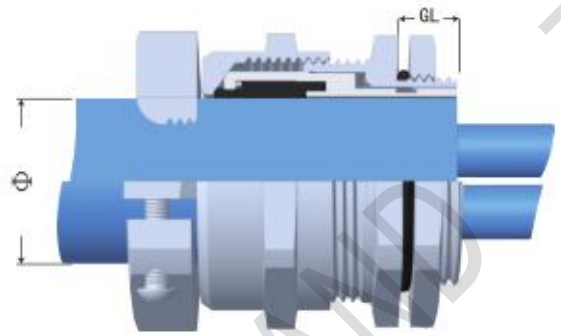

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cale range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SJ-M12-08	M12×1.5	12	4~8	6	14/16	50
SJ-M16-08	M16×1.5	16	4~8	7	17/18	50
SJ-M16-10	M16×1.5	16	5~10	7	20/20	50
SJ-M18-10	M18×1.5	18	5~10	7	20/20	50
SJ-M20-12	M20×1.5	20	6~12	7	22/22	50
SJ-M20-14	M20×1.5	20	8~14	7	24/24	50
SJ-M22-14	M22×1.5	22	8~14	8	24/24	50
SJ-M24-14	M24×1.5	24	8~14	8	24/27	50
SJ-M25-14	M25×1.5	25	8~14	8	24/27	50
SJ-M25-18	M25×1.5	25	13~18	8	30/30	50
SJ-M27-18	M27×2.0	27	13~18	8	30/30	20
SJ-M30-18	M30×2.0	30	13~18	8	30/32	20
SJ-M32-25	M32×1.5	32	18~25	9	40/40	20
SJ-M36-25	M36×2.0	36	18~25	9	40/40	20
SJ-M40-30	M40×1.5	40	22~30	10	45/45	10
SJ-M40-32	M40×1.5	40	24~32	10	50/50	10
SJ-M48-32	M48×2.0	48	24~32	10	50/52	10
SJ-M50-38	M50×1.5	50	30~38	12	57/55	5
SJ-M60-44	M60×2.0	60	37~44	12	64/64	5
SJ-M63-44	M63×1.5	63	37~44	12	64/68	5
SJ-PG7-08	PG7	12.5	4~8	7	17/17	50
SJ-PG9-08	PG9	15.2	4~8	7	17/17	50
SJ-PG11-10	PG11	18.6	5~10	7	20/20	50
SJ-PG13.5-12	PG13.5	20.5	6~12	7	22/22	50
SJ-PG16-14	PG16	22.5	8~14	8	24/24	50
SJ-PG21-18	PG21	28.3	13~18	8	30/30	50
SJ-PG25-20	PG25	29.8	15~20	8	30/32	20
SJ-PG29-25	PG29	37	18~25	9	40/40	20
SJ-PG36-32	PG36	47	24~32	10	50/50	10
SJ-PG42-38	PG42	54	30~38	10	58/58	5
SJ-PG48-44	PG48	59.8	37~44	12	64/64	5

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SJ-G1/4-08	G1/4	13.15	4~8	6	14/16	50
SJ-G3/8-08	G3/8	16.65	4~8	7	17/18	50
SJ-G1/2-12	G1/2	20.95	6~12	8	22/22	50
SJ-G1/2-14	G1/2	20.95	8~14	8	22/24	50
SJ-G3/4-18	G3/4	26.44	13~18	8	30/30	50
SJ-G1-22	G1	33.24	16~22	9	34/36	20
SJ-G1-25	G1	33.24	18~25	9	34/40	20
SJ-G1-1/4-30	G1-1/4	41.91	23~30	10	45/45	10
SJ-G1-1/4-32	G1-1/4	41.91	26~32	10	45/50	10
SJ-G1-1/2-32	G1-1/2	47.8	25~32	10	50/52	5
SJ-G1-1/2-38	G1-1/2	47.8	32~38	10	50/58	5
SJ-G2-44	G2	59.61	37~44	12	64/64	5
SJ-NPT1/4-08	NPT1/4	13.15	4~8	6	14/16	50
SJ-NPT3/8-08	NPT3/8	16.65	4~8	7	17/18	50
SJ-NPT1/2-12	NPT1/2	20.95	6~12	8	22/22	50
SJ-NPT1/2-14	NPT1/2	20.95	8~14	8	22/24	50
SJ-NPT3/4-18	NPT3/4	26.44	13~18	8	30/30	50
SJ-NPT1-22	NPT1	33.24	16~22	9	34/36	20
SJ-NPT1-25	NPT1	33.24	18~25	9	34/40	20
SJ-NPT1-1/4-30	NPT1-1/4	41.91	23~30	10	45/45	10
SJ-NPT1-1/4-32	NPT1-1/4	41.91	26~32	10	45/50	10
SJ-NPT1-1/2-32	NPT1-1/2	47.8	25~32	10	50/52	5
SJ-NPT1-1/2-38	NPT1-1/2	47.8	32~38	10	50/58	5
SJ-NPT2-44	NPT2	59.61	37~44	12	64/64	5

接管式铜镀镍电缆防水接头

Pipe connected brass nickel plated cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍制成, 配合三元乙丙密封圈, 使产品具有防护等级高, 耐候性强等特性, 另结构采用内外丝接管设计, 可与各类管件进行对接

订购说明: NPT螺纹默认不附螺母, 配扁形密封垫片, 部分型号需要定制

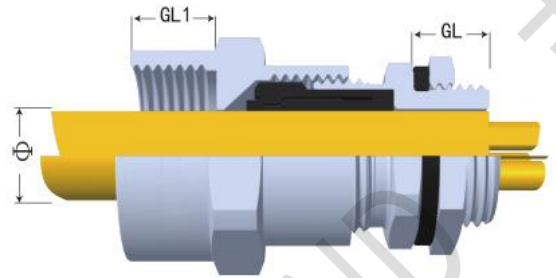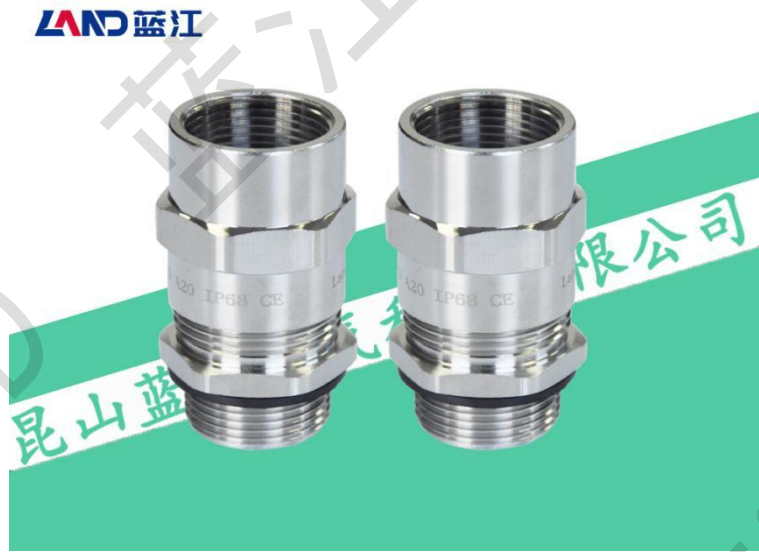

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of nickel plated brass and is equipped with a EPDM sealing ring, which gives the product high protection level and strong weather resistance. In addition, the structure adopts an inner and outer wire connection design, which can be docked with various types of pipe fittings

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread length	Wrench Size	packaging
PN.	External	internal	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M20A-12	M20×1.5	M20×1.5	7~12	12	24/24	20
JGEX-M20A-11	M20×1.5	M20×1.5	6~10.5	12	24/24	20
JGEX-M20A-09	M20×1.5	M20×1.5	5~9	12	24/24	20
JGEX-M25A-18	M25×1.5	M25×1.5	13~18	12	32/32	20
JGEX-M25A-16	M25×1.5	M25×1.5	11~16	12	32/32	20
JGEX-M25A-14	M25×1.5	M25×1.5	8~14	12	32/32	20
JGEX-M25A-10	M25×1.5	M25×1.5	6~10	12	32/32	20
JGEX-M32A-25	M32×1.5	M32×1.5	18~25	12.5	40/40	20
JGEX-M32A-22	M32×1.5	M32×1.5	16~22	12.5	40/40	20
JGEX-G1/2A-12	G1/2	G1/2	7~12	12	24/24	20
JGEX-G1/2A-11	G1/2	G1/2	6~10.5	12	24/24	20
JGEX-G1/2A-09	G1/2	G1/2	5~9	12	24/24	20
JGEX-G3/4A-18	G3/4	G3/4	13~18	12	32/32	20
JGEX-G3/4A-16	G3/4	G3/4	11~16	12	32/32	20
JGEX-G3/4A-14	G3/4	G3/4	8~14	12	32/32	20
JGEX-G3/4A-10	G3/4	G3/4	6~10	12	32/32	20
JGEX-G1A-25	G1	G1	18~25	12.5	40/40	20
JGEX-G1A-22	G1	G1	16~22	12.5	40/40	20
JGEX-NPT1/2A-12	G1/2	G1/2	7~12	12	24/24	20
JGEX-NPT1/2A-11	G1/2	G1/2	6~10.5	12	24/24	20
JGEX-NPT1/2A-09	G1/2	G1/2	5~9	12	24/24	20
JGEX-NPT3/4A-18	G3/4	G3/4	13~18	12	32/32	20
JGEX-NPT3/4A-16	G3/4	G3/4	11~16	12	32/32	20
JGEX-NPT3/4A-14	G3/4	G3/4	8~14	12	32/32	20
JGEX-NPT3/4A-10	G3/4	G3/4	6~10	12	32/32	20
JGEX-NPT1A-22	G1	G1	16~22	12.5	40/40	20
JGEX-NPT1A-25	G1	G1	18~25	12.5	40/40	20

防折弯铜镀镍电缆防水接头

Stress relief brass nickel plated cable gland

产品材料: 默认黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品采用黄铜镀镍, 三元乙丙橡胶, 结合不锈钢弹簧制成, 使其在设备工作过程中, 对电缆进行有效扭曲折弯保护, 防护等级高, 抗拉力强

订购说明: 默认标配螺母, O型密封圈, 部分型号需要定制, 具体交期咨询销售经理

LAND 蓝江

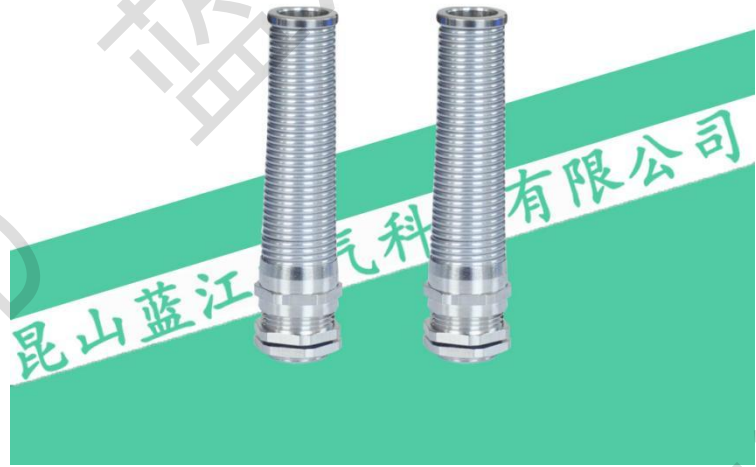

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass plated with nickel, EPDM rubber, and combined with stainless steel springs to effectively twist and bend cables during equipment operation. It has a high protection level and strong tensile strength

Ordering Tips: Default standard includes nuts and O-ring seals, some models require customization, please consult the sales manager for specific delivery time

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG6B-P-03	M6×1.0	6	2.5~3	4	8/8	50
MG8B-P-04	M8×1.0	8	3~4	6	11/11	50
MG10B-P-06	M10×1.5	10	3~6.5	7	14/14	50
MG12B-P-06	M12×1.5	12	3~6.5	6	14/14	50
MG12B-P-08	M14×1.5	12	4~8	6	14/16	50
MG14B-P-08	M14×1.5	14	4~8	7	17/17	50
MG16B-P-08	M16×1.5	16	4~8	7	17/18	50
MG16B-P-10	M16×1.5	16	5~10	7	20/20	50
MG18B-P-10	M18×1.5	18	5~10	7	20/20	50
MG20B-P-12	M20×1.5	20	6~12	7	22/22	50
MG20B-P-14	M20×1.5	20	8~14	7	24/24	20
MG22B-P-14	M22×1.5	22	8~14	8	24/24	20
MG25B-P-16	M25×1.5	25	10~16	8	27/27	20
MG25B-P-18	M25×1.5	25	13~18	8	30/30	20
MG32B-P-22	M32×1.5	32	15~22	9	34/34	20
PG7B-P-06	PG7	12.5	3~6.5	6	14/14	50
PG9B-P-08	PG9	15.2	4~8	7	17/17	50
PG11B-P-10	PG11	18.6	5~10	7	20/20	50
PG13.5B-P-12	PG13.5	20.5	6~12	7	22/22	50
PG16B-P-14	PG16	22.5	8~14	8	24/24	20
PG21B-P-18	PG21	28.3	13~18	8	30/30	20
PG36B-P-32	PG36	47	24~32	10	50/50	10
G1/4B-P-06	G1/4	13.15	3~6.5	6	14/14	50
G3/8B-P-08	G3/8	16.65	4~8	7	17/17	50
G1/2B-P-12	G1/2	20.95	6~12	7	22/22	50
G3/4B-P-18	G3/4	26.44	13~18	8	30/30	20

90度弯角铜镀镍电缆防水接头

90 degree angled brass nickel plated cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍制成, 90度弯角穿线设计, 半通螺帽压紧密封, 使得电缆在需要转角过程中, 更加美观与便捷, 防护等级高, 抗拉力强

订购说明: NPT螺纹默认不附螺母, 部分型号需要定制

LAND 蓝江

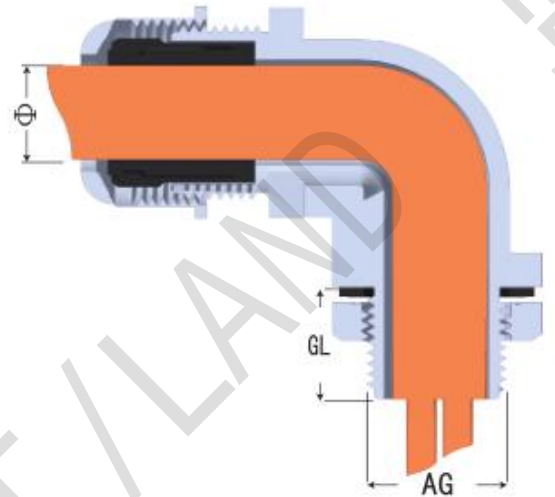

Product materials: Nickel Plated Brass

Thread Standard: M thread, G thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of nickel plated brass, with a 90 degree bending angle threading design and a semi threaded nut that is tightly sealed, making the cable more beautiful and convenient during the process of turning. It has a high protection level and strong tensile strength

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12B-E-06	M12×1.5	12	3~6.5	6	14/14	20
MG12B-E-08	M12×1.5	14	4~8	6	14/16	20
MG14B-E-08	M14×1.5	14	4~8	7	17/17	20
MG16B-E-08	M16×1.5	16	4~8	7	17/18	20
MG16B-E-10	M16×1.5	16	5~10	7	20/20	20
MG18B-E-10	M18×1.5	18	5~10	7	20/20	20
MG20B-E-12	M20×1.5	20	6~12	8	22/22	20
MG25B-E-18	M25×1.5	25	13~18	8	30/30	20
MG32B-E-25	M32×1.5	32	18~25	9	40/40	20
MG40B-E-30	M40×1.5	40	22~30	10	45/45	20
MG50B-E-32	M50×1.5	50	24~32	10	57/55	20
MG63B-E-44	M63×1.5	63	37~44	12	64/68	20
G1/4B-E-06	G1/4	13.15	3~6.5	6	14/16	20
G3/8B-E-10	G3/8	16.65	6~10	7	17/18	20
G1/2B-E-12	G1/2	20.95	6~12	8	22/22	20
G3/4B-E-18	G3/4	26.44	13~18	8	30/30	20
G1B-E-22	G1	33.24	16~22	9	34/36	20
G1-1/4B-E-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2B-E-32	G1-1/2	47.80	25~32	10	50/52	20
G2B-E-44	G2	59.61	37~44	12	64/64	20

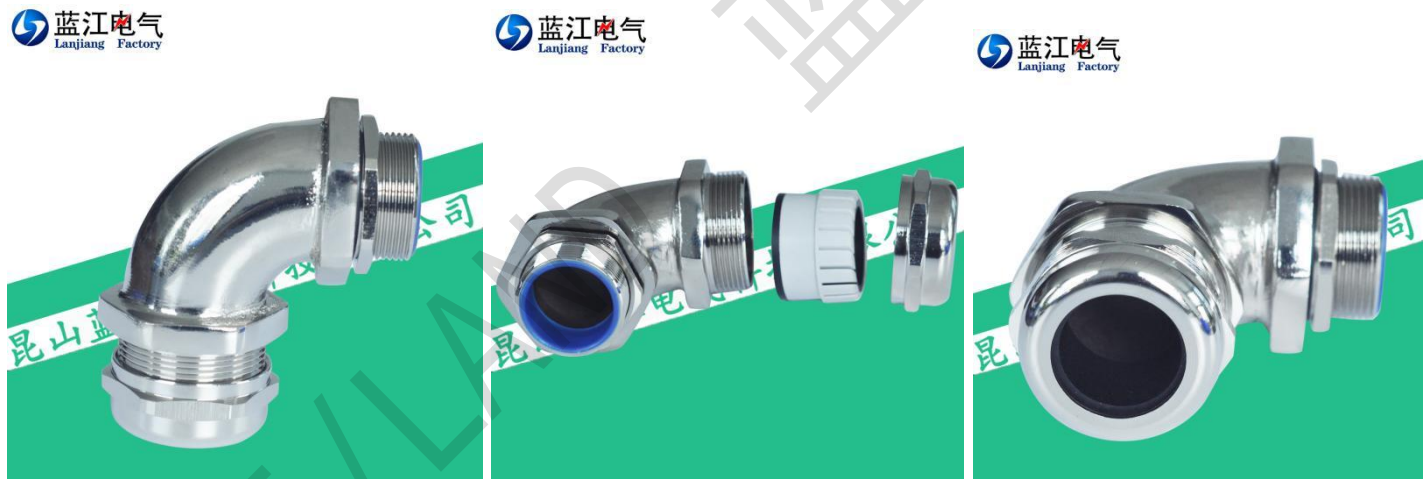

硅胶铜镀镍电缆防水接头

Silicone Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G牙，NPT牙

产品特性：符合CE，IP68

温度测试：-20℃～180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，耐高温，防护等级高

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term 220 ° C

Design Features: Silicone sealing ring, high temperature resistance, high protection level

产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	M-PG-G-NPT	mm	mm	nut/cap mm	PCS
MG12C-06	M12×1.5	4~6	6	16	100
MG14C-08	M14×1.5	5~8	7	18	100
MG16C-08	M16×1.5	5~8	7	18	100
MG18C-10	M18×1.5	8~10	7	20	100
MG20C-12	M20×1.5	10~12	8	22	50
PG7C-06	PG7	4~6	6	16	100
PG9C-08	PG9	6~8	7	18	100
PG11C-10	PG11	8~10	7	20	100
PG13.5C-12	PG13.5	10~12	8	22	50



耐高温铜镀镍电缆防水接头

High temperature Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68

温度测试：-20℃~180℃，短时可达220℃

设计特点：本产品采用黄铜镀镍与改性硅橡胶制成，

使其具有耐高温，防护等级高，抗拉力强等特性

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：NPT默认不附螺母，部分型号需要定制

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: This product is made of brass plated with nickel and modified silicone rubber, which gives it high temperature resistance, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit

Ordering Tips: NPT does not come with nuts by default, some models require customization

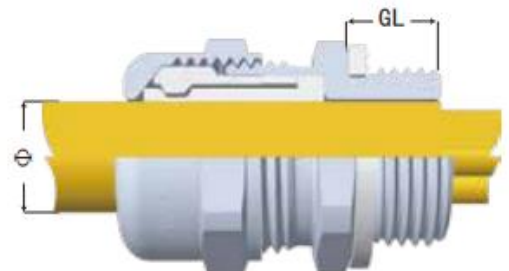

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-HT	M12×1.5	12	4~8	8	17/17	50
MG16A-08-HT	M16×1.5	16	4~8	8	18/18	50
MG16A-10-HT	M16×1.5	16	6~10	9	22/22	50
MG20A-14-HT	M20×1.5	20	8~14	10	26/26	50
MG20A-12-HT	M20×1.5	20	7~12	10	26/26	50
MG25A-18-HT	M25×1.5	25	13~18	12	32/32	50
MG25A-16-HT	M25×1.5	25	11~16	12	32/32	50
MG32A-25-HT	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22-HT	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30-HT	M40×1.5	40	24~30	15	50/50	10
MG50A-40-HT	M50×1.5	50	33~40	15	59/59	10
MG63A-45-HT	M63×1.5	63	38~45	15	68/68	10
PG7A-08-HT	PG7	12.5	4~8	8	17/17	50
PG9A-08-HT	PG9	15.2	4~8	8	18/18	50
PG11A-10-HT	PG11	18.6	6~10	9	22/22	50
PG13.5A-12-HT	PG13.5	20.5	7~12	10	24/24	50
PG16A-14-HT	PG16	22.5	8~14	10	26/26	50
PG16A-12-HT	PG16	22.5	7~12	10	26/26	50
PG21A-18-HT	PG21	28.3	13~18	12	32/32	50
PG21A-16-HT	PG21	28.3	11~16	12	32/32	50
PG29A-25-HT	PG29	37	18~25	12.5	40/40	20
PG29A-22-HT	PG29	37	16~22	12.5	40/40	20
PG36A-30-HT	PG36	47	24~30	15	50/50	10
PG42A-40-HT	PG42	54	33~40	15	59/59	10
PG48A-45-HT	PG48	59.3	38~45	15	68/68	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08-HT	G1/4	13.15	4~8	8	17/17	50
G3/8A-10-HT	G3/8	16.65	6~10	9	22/22	50
G1/2A-12-HT	G1/2	20.95	7~12	9.5	26/26	50
G1/2A-14-HT	G1/2	20.95	8~14	10	26/26	50
G3/4A-18-HT	G3/4	26.44	13~18	12	32/32	50
G3/4A-16-HT	G3/4	26.44	11~16	12	32/32	50
G1A-25-HT	G1	33.24	18~25	12.5	40/40	20
G1A-22-HT	G1	33.24	18~25	12.5	40/40	20
G1-1/4A-30-HT	G1-1/4	41.91	24~30	15	50/50	10
G1-1/2A-40-HT	G1-1/2	47.8	33~40	15	59/59	10
G2A-45-HT	G2	59.61	38~45	15	68/68	10
NPT1/4A-08-HT	NPT1/4	13.15	4~8	8	17/17	50
NPT3/8A-10-HT	NPT3/8	16.65	6~10	9	22/22	50
NPT1/2A-12-HT	NPT1/2	20.95	7~12	9.5	26/26	50
NPT1/2A-14-HT	NPT1/2	20.95	8~14	10	26/26	50
NPT3/4A-18-HT	NPT3/4	26.44	13~18	12	32/32	50
NPT3/4A-16-HT	NPT3/4	26.44	11~16	12	32/32	50
NPT1A-25-HT	NPT1	33.24	18~25	12.5	40/40	20
NPT1A-22-HT	NPT1	33.24	16~22	12.5	40/40	20
NPT1-1/4A-30-HT	NPT1-1/4	41.91	24~30	15	50/50	10
NPT1-1/2A-40-HT	NPT1-1/2	47.8	33~40	15	59/59	10
NPT2A-45-HT	NPT2	59.61	38~45	15	68/68	10

阻燃铜镀镍电缆防水接头

Flame retardant Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙


产品特性：符合CE，IP68、UL94V-0

温度测试：-40℃~105℃，短时可达120℃

设计特点：本产品采用黄铜镀镍与改性阻燃橡胶制成，使其具有防火阻燃，防护等级高，抗拉力强等特性

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：NPT牙默认不附螺母，部分型号需要定制

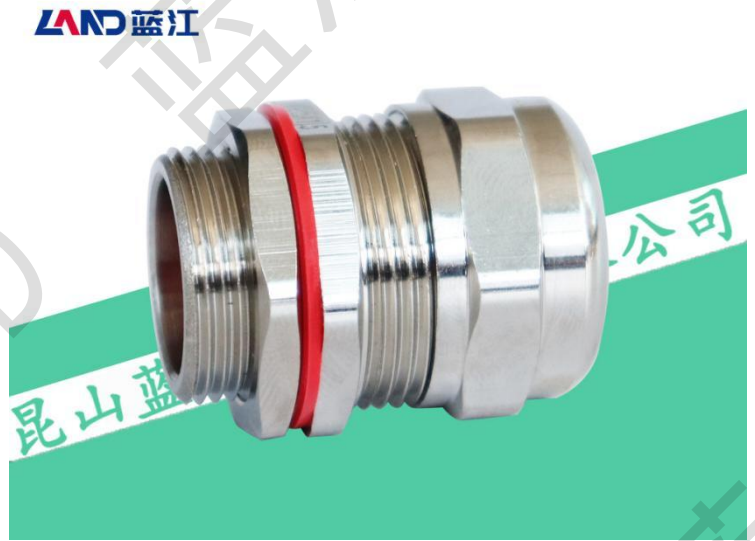

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass nickel plated and modified flame-retardant rubber, which gives it the characteristics of fire resistance, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: NPT does not come with nuts by default, some models require customization



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-V0	M12×1.5	12	4~8	8	17/17	50
MG16A-08-V0	M16×1.5	16	4~8	8	18/18	50
MG16A-10-V0	M16×1.5	16	6~10	9	22/22	50
MG20A-14-V0	M20×1.5	20	8~14	10	26/26	50
MG20A-12-V0	M20×1.5	20	7~12	10	26/26	50
MG25A-18-V0	M25×1.5	25	13~18	12	32/32	50
MG25A-16-V0	M25×1.5	25	11~16	12	32/32	50
MG32A-25-V0	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22-V0	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30-V0	M40×1.5	40	24~30	15	50/50	10
MG50A-40-V0	M50×1.5	50	33~40	15	59/59	10
MG63A-45-V0	M63×1.5	63	38~45	15	68/68	10
PG7A-08-V0	PG7	12.5	4~8	8	17/17	50
PG9A-08-V0	PG9	15.2	4~8	8	18/18	50
PG11A-10-V0	PG11	18.6	6~10	9	22/22	50
PG13.5A-12-V0	PG13.5	20.5	7~12	10	24/24	50
PG16A-14-V0	PG16	22.5	8~14	10	26/26	50
PG16A-12-V0	PG16	22.5	7~12	10	26/26	50
PG21A-18-V0	PG21	28.3	13~18	12	32/32	50
PG21A-16-V0	PG21	28.3	11~16	12	32/32	50
PG29A-25-V0	PG29	37	18~25	12.5	40/40	20
PG29A-22-V0	PG29	37	16~22	12.5	40/40	20
PG36A-30-V0	PG36	47	24~30	15	50/50	10
PG42A-40-V0	PG42	54	33~40	15	59/59	10
PG48A-45-V0	PG48	59.3	38~45	15	68/68	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08-V0	G1/4	13.15	4~8	8	17/17	50
G3/8A-10-V0	G3/8	16.65	6~10	9	22/22	50
G1/2A-12-V0	G1/2	20.95	7~12	9.5	26/26	50
G1/2A-14-V0	G1/2	20.95	8~14	10	26/26	50
G3/4A-18-V0	G3/4	26.44	13~18	12	32/32	50
G3/4A-16-V0	G3/4	26.44	11~16	12	32/32	50
G1A-25-V0	G1	33.24	18~25	12.5	40/40	20
G1A-22-V0	G1	33.24	18~25	12.5	40/40	20
G1-1/4A-30-V0	G1-1/4	41.91	24~30	15	50/50	10
G1-1/2A-40-V0	G1-1/2	47.8	33~40	15	59/59	10
G2A-45-V0	G2	59.61	38~45	15	68/68	10
NPT1/4A-08-V0	NPT1/4	13.15	4~8	8	17/17	10
NPT3/8A-10-V0	NPT3/8	16.65	6~10	9	22/22	50
NPT1/2A-12-V0	NPT1/2	20.95	7~12	9.5	26/26	50
NPT1/2A-14-V0	NPT1/2	20.95	8~14	10	26/26	50
NPT3/4A-18-V0	NPT3/4	26.44	13~18	12	32/32	50
NPT3/4A-16-V0	NPT3/4	26.44	11~16	12	32/32	50
NPT1A-25-V0	NPT1	33.24	18~25	12.5	40/40	50
NPT1A-22-V0	NPT1	33.24	16~22	12.5	40/40	20
NPT1-1/4A-30-V0	NPT1-1/4	41.91	24~30	15	50/50	20
NPT1-1/2A-40-V0	NPT1-1/2	47.8	33~40	15	59/59	10
NPT2A-45-V0	NPT2	59.61	38~45	15	68/68	10

DEX2系列-单密封铜镀镍铠装防爆填料函

DEX2 Explosion-proof Nickel Plated Brass Armored cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品胶泥型单密封出线设计, 内部为



铠装夹紧装置, 采用单密封结构, 具有防水防爆, 防

护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: NPT默认不附螺母, 部分型号需要定制

LAND 蓝江

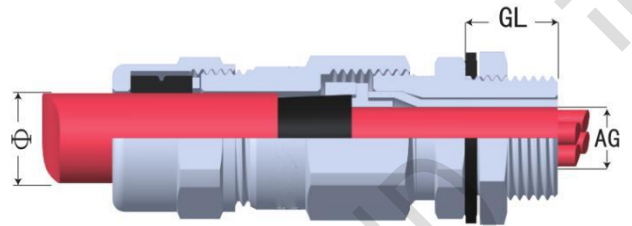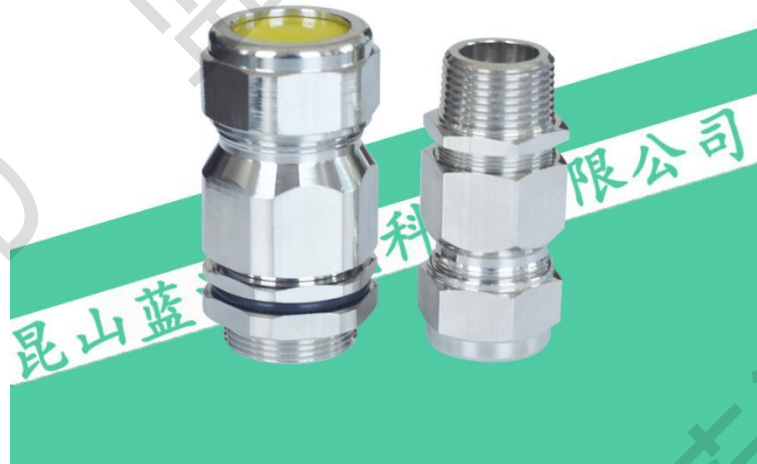

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP66, SYEx, ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a single sealed lead out design with adhesive mud type, and an armored clamping device inside. It adopts a single sealed structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
DEX2-M20-16	M20×1.5	12~16	6~10	15	20
DEX2-M20-20	M20×1.5	15~20	11~15	15	20
DEX2-M25-20	M25×1.5	15~20	11~15	15	20
DEX2-M25-25	M25×1.5	17~25	11~15	15	20
DEX2-M32-25	M32×1.5	17~25	15~20	15	10
DEX2-M32-25	M32×1.5	23~32	15~20	15	10
DEX2-M40-32	M40×1.5	23~32	18~26	15	10
DEX2-M50-40	M50×1.5	34~40	28~32	15	5
DEX2-M63-50	M63×1.5	44~50	35~45	15	5
DEX2-G1/2-16	G1/2	12~16	6~10	15	20
DEX2-G1/2-20	G1/2	15~20	11~15	15	20
DEX2-G3/4-20	G3/4	15~20	11~15	15	20
DEX2-G3/4-25	G3/4	17~25	11~15	15	20
DEX2-G1-25	G1	17~25	15~20	15	10
DEX2-G1-32	G1	23~32	15~20	15	10
DEX2-G1-1/4-32	G1-1/4	23~32	18~26	15	10
DEX2-G1-1/2-40	G1-1/2	34~40	28~32	15	5
DEX2-G2-50	G2	44~50	35~45	15	5
DEX2-NPT1/2-16	NPT1/2	12~16	6~10	15	20
DEX2-NPT1/2-20	NPT1/2	15~20	11~15	15	20
DEX2-NPT3/4-20	NPT3/4	15~20	11~15	15	20
DEX2-NPT3/4-25	NPT3/4	17~25	11~15	15	20
DEX2-NPT1-25	NPT1	17~25	15~20	15	10
DEX2-NPT1-32	NPT1	23~32	15~20	15	10
DEX2-NPT1-1/4-32	NPT1-1/4	23~32	18~26	15	10
DEX2-NPT1-1/2-40	NPT1-1/2	34~40	28~32	15	5
DEX2-NPT2-50	NPT2	44~50	35~45	15	5

SKZEX系列-双密封铜镀镍铠装防爆填料函

SKZEX Explosion-proof Nickel Plated Brass Armored cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品双密封圈出线锁紧设计, 内部为铠装夹紧装置, 采用双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: NPT默认不附螺母, 部分型号需要定制

LAND 蓝江

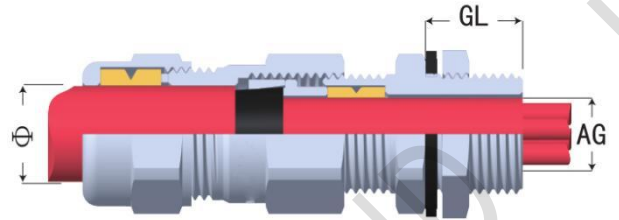

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP66, SYEx, ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a dual sealing ring locking design for the outgoing line, with an armored clamping device inside. It adopts a dual sealing structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
SKZEX-M20-16	M20×1.5	12~16	6~10	15	20
SKZEX-M20-20	M20×1.5	15~20	11~15	15	20
SKZEX-M25-20	M25×1.5	15~20	11~15	15	20
SKZEX-M25-25	M25×1.5	17~25	11~15	15	20
SKZEX-M32-25	M32×1.5	17~25	15~20	15	10
SKZEX-M32-25	M32×1.5	23~32	15~20	15	10
SKZEX-M40-32	M40×1.5	23~32	18~26	15	10
SKZEX-M50-40	M50×1.5	34~40	28~32	15	5
SKZEX-M63-50	M63×1.5	44~50	35~45	15	5
SKZEX-G1/2-16	G1/2	12~16	6~10	15	20
SKZEX-G1/2-20	G1/2	15~20	11~15	15	20
SKZEX-G3/4-20	G3/4	15~20	11~15	15	20
SKZEX-G3/4-25	G3/4	17~25	11~15	15	20
SKZEX-G1-25	G1	17~25	15~20	15	10
SKZEX-G1-32	G1	23~32	15~20	15	10
SKZEX-G1-1/4-32	G1-1/4	23~32	18~26	15	10
SKZEX-G1-1/2-40	G1-1/2	34~40	28~32	15	5
SKZEX-G2-50	G2	44~50	35~45	15	5
SKZEX-NPT1/2-16	NPT1/2	12~16	6~10	15	20
SKZEX-NPT1/2-20	NPT1/2	15~20	11~15	15	20
SKZEX-NPT3/4-20	NPT3/4	15~20	11~15	15	20
SKZEX-NPT3/4-25	NPT3/4	17~25	11~15	15	20
SKZEX-NPT1-25	NPT1	17~25	15~20	15	10
SKZEX-NPT1-32	NPT1	23~32	15~20	15	10
SKZEX-NPT1-1/4-32	NPT1-1/4	23~32	18~26	15	10
SKZEX-NPT1-1/2-40	NPT1-1/2	34~40	28~32	15	5
SKZEX-NPT2-50	NPT2	44~50	35~45	15	5

EXd1系列-隔爆铜镀镍填料函

EXd1 Explosion-proof Nickel Plated Brass cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍配合加长硅胶密封圈制成使用压紧帽使电缆锁紧, 具有隔爆性能, 广泛应用于各种防爆场所, 默认配备防水O型密封圈。

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 配密封O型圈, 部分型号需定制

LAND 蓝江

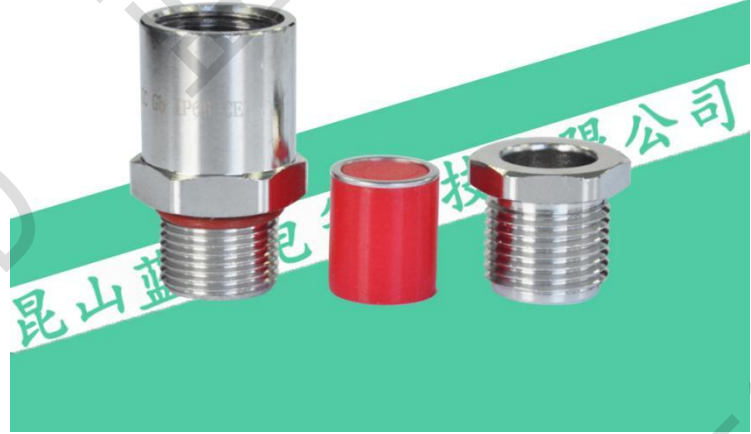

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP66, SYEx, ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product is made of brass nickel plated with an extended silicone sealing ring. It uses a compression cap to lock the cable and has explosion-proof performance. It is widely used in various explosion-proof places and is equipped with a waterproof O-ring by default.

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default without nut, equipped with sealing O-ring, Some models require customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
Exd1-M20-14	M20×1.5	20	8~14	15	26	20
Exd1-M25-16	M25×1.5	25	8~16	15	30	20
Exd1-M25-20	M25×1.5	25	10~20	15	38	20
Exd1-M32-20	M32×1.5	32	10~20	18	38	10
Exd1-M32-25	M32×1.5	32	10~25	18	46	10
Exd1-M40-25	M40×1.5	40	10~25	18	46	5
Exd1-M40-32	M40×1.5	40	14~32	18	50	5
Exd1-M50-32	M50×1.5	50	14~32	18	50	5
Exd1-M50-41	M50×1.5	50	17~41	18	62	5
Exd1-M63-41	M63×1.5	63	17~41	18	62	1
Exd1-G1/2-14	G1/2	20.95	8~14	15	26	20
Exd1-G3/4-16	G3/4	26.44	8~16	15	30	20
Exd1-G3/4-20	G3/4	26.44	10~20	15	38	20
Exd1-G1-20	G1	33.2	10~20	18	38	10
Exd1-G1-25	G1	33.1	10~25	18	46	10
Exd1-G1-1/4-25	G1-1/4	41.9	10~25	18	46	5
Exd1-G1-1/4-32	G1-1/4	41.9	14~32	18	50	5
Exd1-G1-1/2-32	G1-1/2	47.8	14~32	18	50	5
Exd1-G1-1/2-41	G1-1/2	47.8	17~41	18	62	5
Exd1-G2-41	G2	59.6	17~41	18	62	1
Exd1-NPT1/2-14	NPT1/2	20.95	8~14	15	26	20
Exd1-NPT3/4-16	NPT3/4	26.44	8~16	15	30	20
Exd1-NPT3/4-20	NPT3/4	26.44	10~20	15	38	20
Exd1-NPT1-20	NPT1	33.5	10~20	18	38	10
Exd1-NPT1-25	NPT1	33.5	10~25	18	46	10
Exd1-NPT1-1/4-25	NPT1-1/4	42	10~25	18	46	5
Exd1-NPT1-1/4-32	NPT1-1/4	42	14~32	18	50	5
Exd1-NPT1-1/2-32	NPT1-1/2	48	14~32	18	50	5
Exd1-NPT1-1/2-41	NPT1-1/2	48	17~41	18	62	5
Exd1-NPT2-41	NPT2	60	17~41	18	62	1

EXd2系列-耐温防水铜镀镍填料函

EXd2 - High temperature waterproof brass nickel plated filler cable gland


产品材料：黄铜镀镍

产品特性：符合CE，IP68

温度测试：-20℃～180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，内压密封锁紧电缆

订购说明：默认不附螺母，配密封O型圈

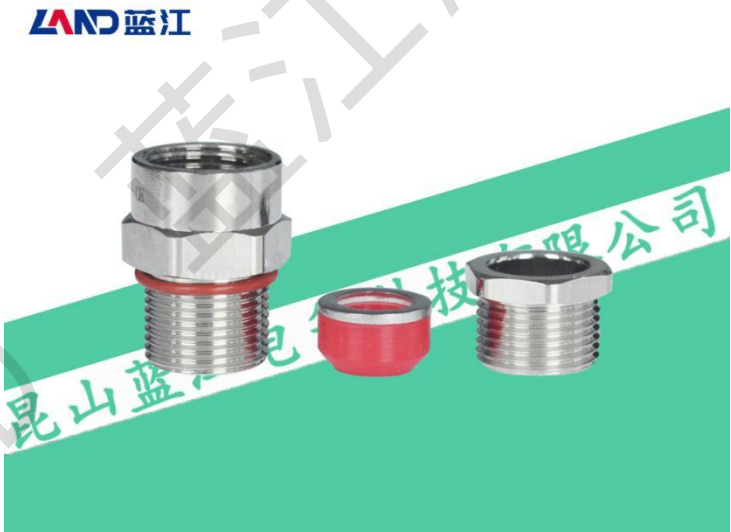

Product materials: Nickel Plated Brass

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: Internal pressure conical silicone sealing ring can effectively lock cables and provide waterproof sealing

Ordering Tips: Default without nut, equipped with sealing O-ring, Some models require customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
Exd2-M20-14	M20×1.5	20	8~14	15	30	50
Exd2-M20-12	M20×1.5	20	7~12	15	26	50
Exd2-M20-08	M20×1.5	20	4~8	15	26	50
Exd2-M20-06	M20×1.5	20	3~6	15	26	50
Exd2-G1/2-14	G1/2	20.95	8~14	15	30	50
Exd2-G1/2-12	G1/2	20.95	7~12	15	30	50
Exd2-G1/2-08	G1/2	20.95	4~8	15	26	50
Exd2-G1/2-06	G1/2	20.95	3~6	15	26	50
Exd2-NPT1/2-14	NPT1/2	20.95	8~14	15	30	50
Exd2-NPT1/2-12	NPT1/2	20.95	7~12	15	26	50
Exd2-NPT1/2-08	NPT1/2	20.95	4~8	15	26	50
Exd2-NPT1/2-06	NPT1/2	20.95	3~6	15	26	50

TJ铜镀镍船用夹紧填料函

TJ Brass nickel plated filler cable gland

产品材料：黄铜镀镍

产品特性：符合CE， IP65

温度测试：-40℃～105℃， 短时可达120℃

设计特点：压紧式密封设计， 铜镀镍船用填料函

订购说明：本款为半铜制填料函， 全铜需要定制



Product materials: Nickel Plated Brass

Product Features: Compliant with CE, IP65

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: Compact sealing design, copper nickel plated marine filler cable gland

Ordering Tips: This is a semi copper stuffing box, all copper requires customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
TJ08-M14*1.0	M14×1.0	14	5～7	10	19/19	50
TJ13-M18*1.0	M18×1.0	18	9～12	11	24/22	50
TJ16-M22*1.0	M22×1.0	22	11～15	11	30/28	50
TJ19-M27*1.5	M27×1.5	27	14～18	14	34/32	20
TJ24-M30*1.5	M30×1.5	30	18～23	14	38/38	20
TJ28-M36*2.0	M36×2.0	36	23～27	14	45/45	20
TJ34-M42*2.0	M42×2.0	42	27～33	14	50/50	10
TJ42-M52*2.0	M52×2.0	52	33～41	14	62/60	10
TJ50-M58*2.0	M58×2.0	58	33～49	20	65/70	5
TJ58-M68*2.0	M68×2.0	68	33～57	20	85/80	5