

LAND 蓝江

MADE IN 
CHINA

中国制造 引领未来

Made in China Leading the Future



蓝江电缆防水接头样册2025A-3版

LAND Cable gland Catalog 2025A-3 Version



创新 引领未来

Customer first, service foremost
客户第一，服务至上



公司简介 Company Profile

昆山蓝江电气科技有限公司，成立于2010年，地址位于苏州昆山市，我们始终专注于电缆防水接头，软管与管接头，机器人管线包研发与生产，公司严格执行ISO9001质量体系标准，可靠的质量，快速的交期获得广大客户一致认可。

业务介绍 Company business

电缆防水接头系列



软管及管接头系列



机器人管线包系统



昆山蓝江电气科技有限公司

Kunshan Land Electric Technology Co., Ltd


产品页码索引



尼龙防爆接头(8-18页)



标准防水接头(19-40页)

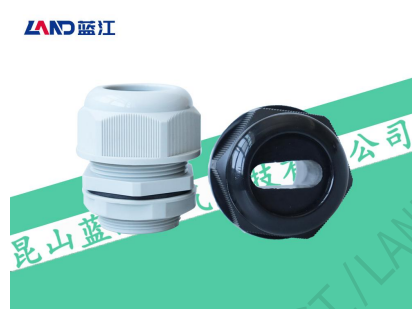

扁孔防水接头(41-43页)




多孔防水接头(44-62页)



防折弯电缆接头(63-67页)




90度防水弯头(68-72页)

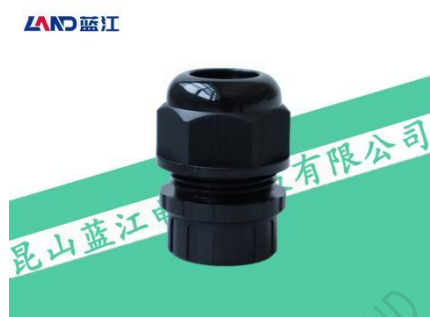

内牙防水接头(73-75页)




阻燃防水接头(76-77页)

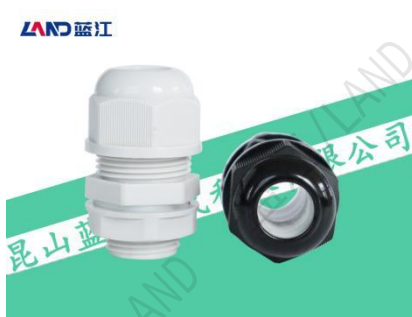


耐温防水接头(78-79页)



单孔防爆钢接头(80-93页)

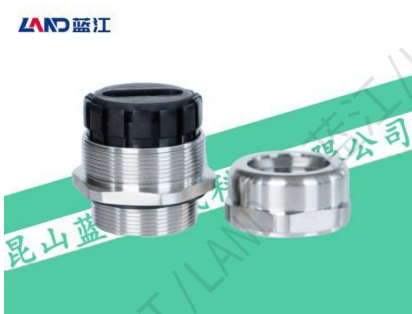

扁孔防爆钢接头(94-96页)

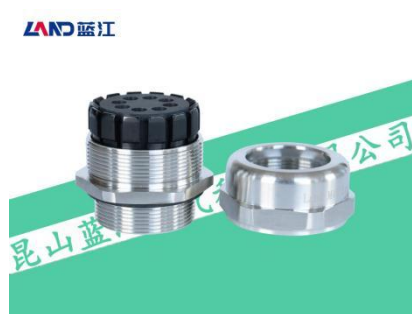

多孔防爆钢接头(97-120页)

产品页码索引

LAND 蓝江



内牙不锈钢接头(121-124页)

LAND 蓝江




接管不锈钢接头(125-127页)

LAND 蓝江



双锁紧不锈钢接头(126-131页)

LAND 蓝江

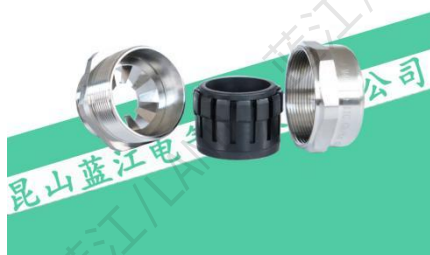

屏蔽不锈钢接头(132-137页)

LAND 蓝江



防折弯不锈钢接头(138-139页)

LAND 蓝江



耐高温不锈钢接头(140-143页)

LAND 蓝江



阻燃不锈钢接头(144-146页)

LAND 蓝江



90度不锈钢弯头(147-148页)

LAND 蓝江



铠装不锈钢填料函(149-156页)

LAND 蓝江



隔爆不锈钢填料函(157-158页)

LAND 蓝江



防水不锈钢填料函(159页)

LAND 蓝江



船用不锈钢填料函(160页)

产品页码索引

LAND 蓝江




防爆铜镀镍接头(161-165页)

LAND 蓝江



标准铜镀镍接头(166-172页)

LAND 蓝江

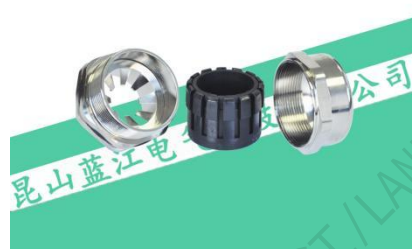

屏蔽防磁波接头(173-182页)

LAND 蓝江



扁孔防爆铜接头(183-185页)

LAND 蓝江



多孔防爆铜接头(186-204页)

LAND 蓝江




双锁紧防水接头(205-207页)

LAND 蓝江



接管式防水接头(208-209页)

LAND 蓝江

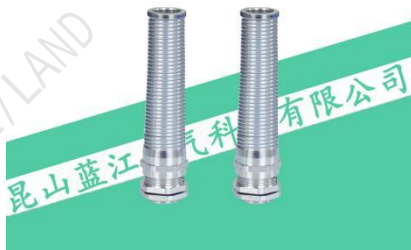

防折弯电缆接头(210-211页)

LAND 蓝江



90度金属弯头(212-213页)

LAND 蓝江



耐高温金属接头(214-217页)

LAND 蓝江



V0阻燃金属接头(218-220页)


LAND 蓝江



铠装防爆填料函(221-224页)

产品页码索引

LAND 蓝江

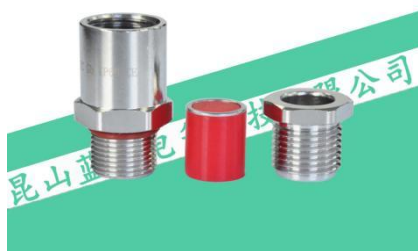


防爆铜填料函(225-226页)

LAND 蓝江



防水铜填料函(19-40页)

LAND 蓝江

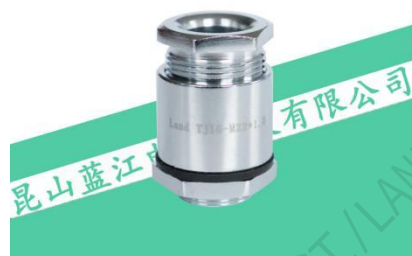

船用填料函(228页)

LAND 蓝江




标准铝防水接头(229-233页)

LAND 蓝江



扁孔铝防水接头(234-236页)

LAND 蓝江

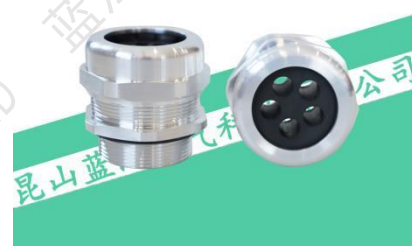

多孔铝防水接头(237-238页)

LAND 蓝江



防磁波铝防水接头(239-241页)

LAND 蓝江



硅胶耐温铝接头(242页)

LAND 蓝江



不锈钢闷盖堵头(243-247页)

LAND 蓝江




铜镀镍闷盖堵头(248-253页)

LAND 蓝江



尼龙闷盖堵头(254-256页)


LAND 蓝江

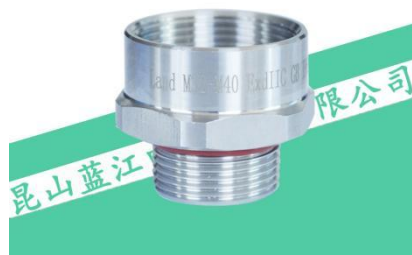

不锈钢扩径环(257-260页)

产品页码索引

LAND 蓝江

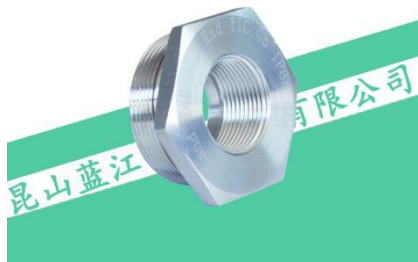


不锈钢缩径环(261-265页)

LAND 蓝江




铜镀镍扩径环(266-268页)

LAND 蓝江

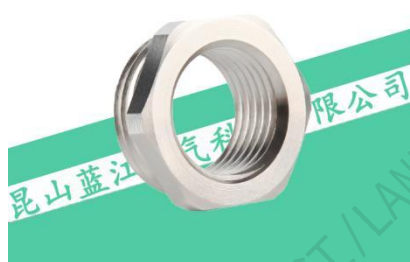

铜镀镍缩径环(269-271页)

LAND 蓝江

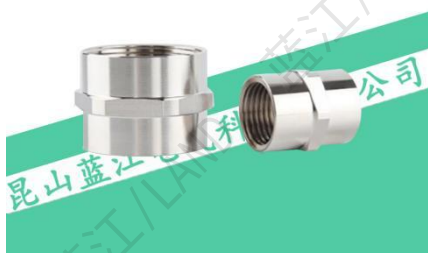

铜镀镍对接环(272页)

LAND 蓝江




尼龙扩径环(273页)

LAND 蓝江



尼龙缩径环(274页)

LAND 蓝江

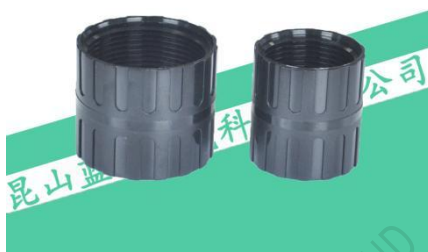

尼龙对接环(275页)

LAND 蓝江



锁紧螺母系列(276-284页)

LAND 蓝江



夹紧圈塞棒(285-290页)

LAND 蓝江




橡胶密封件(291-299页)

LAND 蓝江



接地片装置(300页)

LAND 蓝江

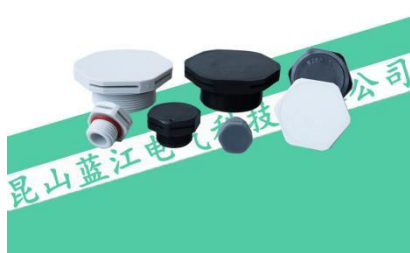

透气阀系列(301-303页)

Ex系列-防爆尼龙防水接头

Explosion proof Nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF牙), NPT牙

产品颜色: 黑色、蓝色、浅灰色

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 防爆电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配O型圈, 但不附螺母, , 如需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread, in compliance with GB/T196-1981 standard

Product color: Black, blue, light gray

Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EX-M12-06B	M12×1.5	12	3~6.5	8	15	50
EX-M12L-06B	M12×1.5	12	3~6.5	15	15	50
EX-M12-08B	M12×1.5	12	4~8	8	15	50
EX-M16-08B	M16×1.5	16	4~8	8	19	50
EX-M16-10B	M16×1.5	16	5~10	8	22	50
EX-M16L-08B	M16×1.5	16	4~8	15	19	50
EX-M18-10B	M18×1.5	18	5~10	8	22	50
EX-M18L-10B	M18×1.5	18	5~10	15	22	50
EX-M20-08B	M20×1.5	20	4~8	9	24	50
EX-M20-10B	M20×1.5	20	5~10	9	24	50
EX-M20-12B	M20×1.5	20	6~12	9	24	50
EX-M20L-12B	M20×1.5	20	6~12	15	24	50
EX-M20-14B	M20×1.5	20	8~14	9	27	50
EX-M20L-14B	M20×1.5	20	8~14	15	27	50
EX-M22-14B	M22×1.5	22	8~14	10	27	50
EX-M22L-14B	M22×1.5	22	8~14	15	27	50
EX-M24-14B	M24×1.5	24	8~14	10	27	50
EX-M25-18B	M25×1.5	25	13~18	11	33	50
EX-M25L-18B	M25×1.5	25	13~18	15	33	50
EX-M27-18B	M27×2.0	27	13~18	11	33	50
EX-M27L-18B	M27×2.0	27	13~18	15	33	50
EX-M30-18B	M30×2.0	30	13~18	11	33	50
EX-M32-25B	M32×1.5	32	18~25	11	42	20
EX-M32L-25B	M32×1.5	32	18~25	15	42	20
EX-M33-25B	M33×2.0	33	18~25	11	42	20
EX-M36-25B	M36×2.0	36	18~25	11	42	20
EX-M36L-25B	M36×2.0	36	18~25	15	42	20
EX-M40-32B	M40×1.5	40	22~32	13	52	10
EX-M40L-32B	M40×1.5	40	22~32	15	52	10
EX-M42-32B	M42×2.0	42	22~32	13	52	10
EX-M48-32B	M48×2.0	48	22~32	13	52	10
EX-M50-38B	M50×1.5	50	32~38	14	60	10
EX-M56-38B	M56×2.0	56	32~38	14	60	10
EX-M60-44B	M60×2.0	60	37~44	15	65	5
EX-M63-44B	M63×1.5	63	37~44	15	65	5
EX-M64-44B	M64×2.0	64	37~44	15	65	5

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EX-PG7-06B	PG7	12.5	3~6.5	8	15	50
EX-PG9-08B	PG9	15.2	4~8	8	19	50
EX-PG9L-08B	PG9	15.2	4~8	15	19	50
EX-PG11-10B	PG11	18.6	5~10	8	22	50
EX-PG11L-10B	PG11	18.6	5~10	15	22	50
EX-PG13.5-10B	PG13.5	20.4	5~10	9	24	50
EX-PG13.5-12B	PG13.5	20.4	6~12	9	24	50
EX-PG13.5L-12B	PG13.5	20.4	6~12	15	24	50
EX-PG16-14B	PG16	22.5	8~14	9	27	50
EX-PG16L-14B	PG16	22.5	8~14	15	27	50
EX-PG21-18B	PG21	28.3	13~18	11	33	50
EX-PG21L-18B	PG21	28.3	13~18	15	33	50
EX-PG29-25B	PG29	37	18~25	11	42	20
EX-PG29L-25B	PG29	37	18~25	15	42	20
EX-PG36-32B	PG36	47	22~32	13	52	10
EX-PG42-38B	PG42	54	32~38	14	60	10
EX-PG48-44B	PG48	59.3	37~44	15	65	5
EX-NPT3/8-10B	NPT3/8	16.66	5~10	11	22	50
EX-NPT1/2-12B	NPT1/2	20.99	6~12	13	24	50
EX-NPT3/4-18B	NPT3/4	26.44	13~18	13	33	50
EX-NPT1-25B	NPT1	33.24	18~25	16	42	20
EX-NPT1-1/4-32B	NPT1-1/4	41.91	22~32	16	52	10
EX-NPT1-1/4-38B	NPT1-1/4	41.91	32~38	16	60	10
EX-NPT1-1/2-38B	NPT1-1/2	47.8	32~38	16	60	10
EX-NPT2-44B	NPT2	59.61	37~44	16	65	5
EX-G1/2-12B	G1/2	20.99	6~12	13	24	50
EX-G3/4-18B	G3/4	26.44	13~18	13	33	50
EX-G1-25B	G1	33.24	18~25	16	42	20
EX-G2-44B	G2	59.61	37~44	16	65	5

Ex系列-防爆扁孔尼龙防水接头

Explosion proof Nylon flat holes cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF牙), NPT牙

产品颜色: 黑色、蓝色、浅灰色

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 防爆电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配O型圈, 但不附螺母, , 如需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread, in compliance with GB/T196-1981 standard

Product color: Black, blue, light gray


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed

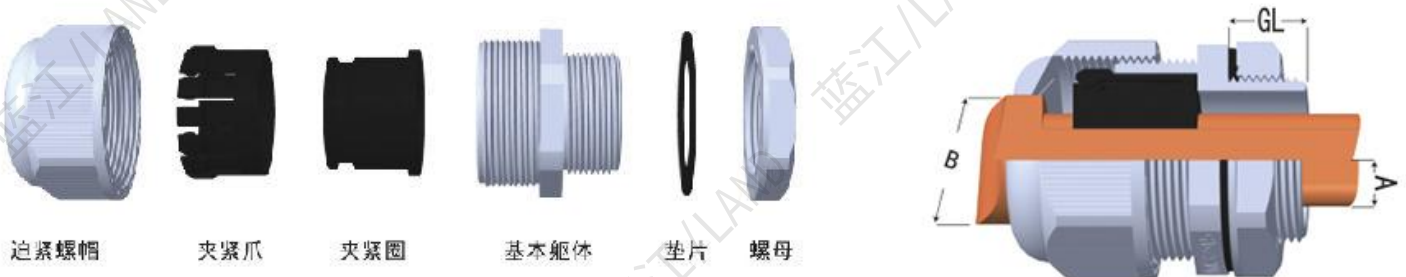

产品参数表/M/PG/G/NPT

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-M20-0612B	M20×1.5	6*12	20	9	27	50
EX-M20L-0612B	M20×1.5	6*12	20	15	27	50
EX-M22-0612B	M22×1.5	6*12	22	10	27	50
EX-M22L-0612B	M22×1.5	6*12	22	15	27	50
EX-M24-0612B	M24×1.5	6*12	24	10	27	50
EX-M25-0614B	M25×1.5	6*14	25	11	33	50
EX-M25L-0614B	M25×1.5	6*14	25	15	33	50
EX-M27-0614B	M27×2.0	6*14	27	11	33	50
EX-M27L-0614B	M27×2.0	6*14	27	15	33	50
EX-M30-0614B	M30×2.0	6*14	30	11	33	50
EX-M32-0519B	M32×1.5	8*14	32	11	42	20
EX-M32L-0519B	M32×1.5	5*19	32	15	42	20
EX-M33-0519B	M33×2.0	8*14	33	11	42	20
EX-M36-0519B	M36×2.0	8*14	36	11	42	20
EX-M36L-0519B	M36×2.0	5*19	36	15	42	20
EX-M40-1230B	M40×1.5	12*30	40	13	52	10
EX-M40L-1230B	M40×1.5	12*30	40	15	52	10
EX-M42-1230B	M42×2.0	12*30	42	13	52	10
EX-M48-1230B	M48×2.0	12*30	48	13	52	10
EX-M50-1334B	M50×1.5	13*34	50	14	60	5
EX-M56-1334B	M56×2.0	13*34	56	14	60	5
EX-M60-1641B	M60×2.0	16*41	60	15	65	5
EX-M63-1641B	M63×1.5	16*41	63	15	65	5
EX-M64-1641B	M64×2.0	16*41	64	15	65	5
EX-PG16-0612B	PG16	6*12	22.5	9	27	50
EX-PG16L-0612B	PG16	6*12	22.5	15	27	50
EX-PG21-0614B	PG21	6*14	28.3	11	33	50
EX-PG29-0519B	PG29	5*19	37	11	42	20
EX-PG36-1230B	PG36	12*30	47	13	52	10
EX-PG42-1334B	PG42	13*34	54	14	60	10
EX-PG48-1641B	PG48	16*41	59.3	15	65	5
EX-NPT3/4-0614B	NPT3/4	6*14	26.44	13	33	50
EX-NPT1-0519B	NPT1	5*19	33.24	16	42	20
EX-NPT1-1/4-1230B	NPT1-1/4	12*30	41.91	16	52	10
EX-NPT1-1/4-1334B	NPT1-1/4	13*34	41.91	16	60	10
EX-NPT1-1/2-1334B	NPT1-1/2	13*34	47.8	16	60	10
EX-NPT2-1641B	NPT2	16*41	59.61	16	65	5
EX-G3/4-0614B	G3/4	6*14	26.44	13	33	50
EX-G1-0519B	G1	5*19	33.24	16	42	20
EX-G2-1641B	G2	16*41	59.61	16	65	5

Ex系列-防爆多孔尼龙防水接头

Explosion proof Nylon Multi holes cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF牙), NPT牙

产品颜色: 黑色、蓝色、浅灰色

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 防爆电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配O型圈, 但不附螺母, , 如需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, in compliance with GB/T196-1981 standard

Product color: Black, blue, light gray



Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: O-rings are provided by default, but nuts are not included. Please specify if needed

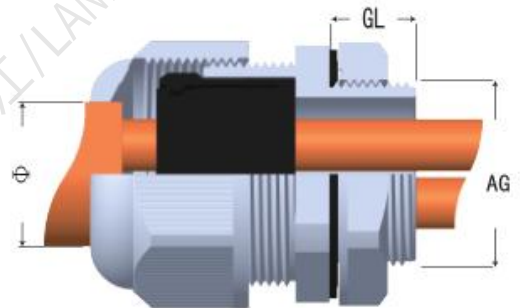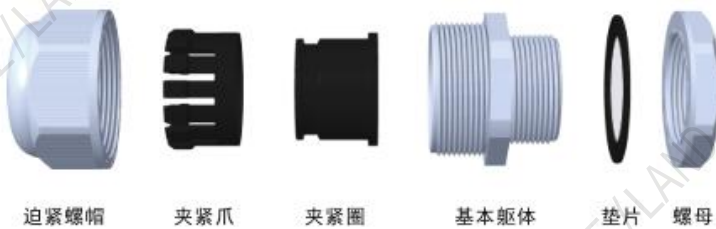

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-M20-H2-06	M20×1.5	4~6	20	9	27	50
EX-M20-H3-05	M20×1.5	3~5	20	9	27	50
EX-M20-H4-04	M20×1.5	2~4	20	9	27	50
EX-M20-H5-03	M20×1.5	1~3	20	9	27	50
EX-M20-H6-03	M20×1.5	1~3	20	9	27	50
EX-M22-H2-06	M22×1.5	4~6	22	10	27	50
EX-M22-H3-05	M22×1.5	3~5	22	10	27	50
EX-M22-H4-04	M22×1.5	2~4	22	10	27	50
EX-M22-H5-03	M22×1.5	1~3	22	10	27	50
EX-M22-H6-03	M22×1.5	1~3	22	10	27	50
EX-M24-H2-06	M24×1.5	4~6	24	10	27	50
EX-M24-H3-05	M24×1.5	3~5	24	10	27	50
EX-M24-H4-04	M24×1.5	2~4	24	10	27	50
EX-M24-H5-03	M24×1.5	1~3	24	10	27	50
EX-M24-H6-03	M24×1.5	1~3	24	10	27	50
EX-M25-H2-08	M25×1.5	6~8	25	11	33	50
EX-M25-H3-07	M25×1.5	5~7	25	11	33	50
EX-M25-H4-06	M25×1.5	4~6	25	11	33	50
EX-M25-H5-05	M25×1.5	3~5	25	11	33	50
EX-M25-H6-05	M25×1.5	3~5	25	11	33	50
EX-M27-H2-08	M27×2.0	6~8	27	11	33	50
EX-M27-H3-07	M27×2.0	5~7	27	11	33	50
EX-M27-H4-06	M27×2.0	4~6	27	11	33	50
EX-M27-H5-05	M27×2.0	3~5	27	11	33	50
EX-M27-H6-05	M27×2.0	3~5	27	11	33	50
EX-M30-H2-08	M30×2.0	6~8	30	11	33	50
EX-M30-H3-07	M30×2.0	5~7	30	11	33	50
EX-M30-H4-06	M30×2.0	4~6	30	11	33	50
EX-M30-H5-05	M30×2.0	3~5	30	11	33	50
EX-M30-H6-05	M30×2.0	3~5	30	11	33	50
EX-M32-H2-10	M32×1.5	8~10	32	11	42	20
EX-M32-H3-10	M32×1.5	8~10	32	11	42	20
EX-M32-H4-09	M32×1.5	7~9	32	11	42	20
EX-M32-H5-08	M32×1.5	6~8	32	11	42	20
EX-M32-H6-07	M32×1.5	5~7	32	11	42	20
EX-M33-H2-10	M33×2.0	8~10	33	11	42	20
EX-M33-H3-10	M33×2.0	8~10	33	11	42	20
EX-M33-H4-09	M33×2.0	7~9	33	11	42	20
EX-M33-H5-08	M33×2.0	6~8	33	11	42	20
EX-M33-H6-07	M33×2.0	5~7	33	11	42	20

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-M36-H2-10	M36×2.0	8~10	36	11	42	20
EX-M36-H3-10	M36×2.0	8~10	36	11	42	20
EX-M36-H4-09	M36×2.0	7~9	36	11	42	20
EX-M36-H5-08	M36×2.0	6~8	36	11	42	20
EX-M36-H6-07	M36×2.0	5~7	36	11	42	20
EX-M40-H2-13	M40×1.5	11~13	40	13	52	10
EX-M40-H3-12	M40×1.5	10~12	40	13	52	10
EX-M40-H4-11	M40×1.5	9~11	40	13	52	10
EX-M40-H5-10	M40×1.5	8~10	40	13	52	10
EX-M40-H6-08	M40×1.5	6~8	40	13	52	10
EX-M42-H2-13	M42×2.0	11~13	42	13	52	10
EX-M42-H3-12	M42×2.0	10~12	42	13	52	10
EX-M42-H4-11	M42×2.0	9~11	42	13	52	10
EX-M42-H5-10	M42×2.0	8~10	42	13	52	10
EX-M42-H6-08	M42×2.0	6~8	42	13	52	10
EX-M48-H2-13	M48×2.0	11~13	48	13	52	10
EX-M48-H3-12	M48×2.0	10~12	48	13	52	10
EX-M48-H4-11	M48×2.0	9~11	48	13	52	10
EX-M48-H5-10	M48×2.0	8~10	48	13	52	10
EX-M48-H6-08	M48×2.0	6~8	48	13	52	10
EX-M50-H2-15	M50×1.5	12~15	50	14	60	10
EX-M50-H3-13	M50×1.5	10~13	50	14	60	10
EX-M50-H4-12	M50×1.5	10~12	50	14	60	10
EX-M50-H5-11	M50×1.5	9~11	50	14	60	10
EX-M50-H6-10	M50×1.5	8~10	50	14	60	10
EX-M60-H2-15	M60×2.0	12~15	60	15	65	5
EX-M60-H3-14	M60×2.0	11~14	60	15	65	5
EX-M60-H4-13	M60×2.0	10~13	60	15	65	5
EX-M60-H5-12	M60×2.0	10~12	60	15	65	5
EX-M60-H6-10	M60×2.0	8~10	60	15	65	5
EX-M63-H2-15	M63×1.5	12~15	63	15	65	5
EX-M63-H3-14	M63×1.5	11~14	63	15	65	5
EX-M63-H4-13	M63×1.5	10~13	63	15	65	5
EX-M63-H5-12	M63×1.5	10~12	63	15	65	5
EX-M63-H6-10	M63×1.5	8~10	63	15	65	5
EX-M64-H2-15	M64×2.0	12~15	64	15	65	5
EX-M64-H3-14	M64×2.0	11~14	64	15	65	5
EX-M64-H4-13	M64×2.0	10~13	64	15	65	5
EX-M64-H5-12	M64×2.0	10~12	64	15	65	5
EX-M64-H6-10	M64×2.0	8~10	64	15	65	5

产品参数表/PG

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-PG16-H2-06	PG16	4~6	22.5	9	27	50
EX-PG16-H3-05	PG16	3~5	22.5	9	27	50
EX-PG16-H4-04	PG16	2~4	22.5	9	27	50
EX-PG16-H5-03	PG16	1~3	22.5	9	27	50
EX-PG16-H6-03	PG16	1~3	22.5	9	27	50
EX-PG21-H2-08	PG21	6~8	28.3	11	33	50
EX-PG21-H3-07	PG21	5~7	28.3	11	33	50
EX-PG21-H4-06	PG21	4~6	28.3	11	33	50
EX-PG21-H5-05	PG21	3~5	28.3	11	33	50
EX-PG21-H6-05	PG21	3~5	28.3	11	33	50
EX-PG29-H2-10	PG29	8~10	37	11	42	20
EX-PG29-H3-10	PG29	8~10	37	11	42	20
EX-PG29-H4-09	PG29	7~9	37	11	42	20
EX-PG29-H5-08	PG29	6~8	37	11	42	20
EX-PG29-H6-07	PG29	5~7	37	11	42	20
EX-PG36-H2-13	PG36	11~13	47	13	52	10
EX-PG36-H3-12	PG36	10~12	47	13	52	10
EX-PG36-H4-11	PG36	9~11	47	13	52	10
EX-PG36-H5-10	PG36	8~10	47	13	52	10
EX-PG36-H6-08	PG36	6~8	47	13	52	10
EX-PG42-H2-15	PG42	12~15	54	14	60	10
EX-PG42-H3-13	PG42	10~13	54	14	60	10
EX-PG42-H4-12	PG42	10~12	54	14	60	10
EX-PG42-H5-11	PG42	9~11	54	14	60	10
EX-PG42-H6-10	PG42	8~10	54	14	60	10
EX-PG48-H2-15	PG48	12~15	59.3	15	65	5
EX-PG48-H3-14	PG48	11~14	59.3	15	65	5
EX-PG48-H4-13	PG48	10~13	59.3	15	65	5
EX-PG48-H5-12	PG48	10~12	59.3	15	65	5
EX-PG48-H6-10	PG48	8~10	59.3	15	65	5

产品参数表/G/NPT

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-NPT3/4-H2-08	NPT3/4	6~8	26.44	13	33	50
EX-NPT3/4-H3-07	NPT3/4	5~7	26.44	13	33	50
EX-NPT3/4-H4-06	NPT3/4	4~6	26.44	13	33	50
EX-NPT3/4-H5-05	NPT3/4	3~5	26.44	13	33	50
EX-NPT3/4-H6-05	NPT3/4	3~5	26.44	13	33	50
EX-NPT1-H2-10	NPT1	8~10	33.24	16	42	20
EX-NPT1-H3-10	NPT1	8~10	33.24	16	42	20
EX-NPT1-H4-09	NPT1	7~9	33.24	16	42	20
EX-NPT1-H5-08	NPT1	6~8	33.24	16	42	20
EX-NPT1-H6-07	NPT1	5~7	33.24	16	42	20
EX-NPT1-1/4-H2-13	NPT1-1/4	11~13	41.91	16	52	10
EX-NPT1-1/4-H3-12	NPT1-1/4	10~12	41.91	16	52	10
EX-NPT1-1/4-H4-11	NPT1-1/4	9~11	41.91	16	52	10
EX-NPT1-1/4-H5-10	NPT1-1/4	8~10	41.91	16	52	10
EX-NPT1-1/4-H6-08	NPT1-1/4	6~8	41.91	16	52	10
EX-NPT1-1/2-H2-15	NPT1-1/2	12~15	47.8	16	60	5
EX-NPT1-1/2-H3-13	NPT1-1/2	10~13	47.8	16	60	5
EX-NPT1-1/2-H4-12	NPT1-1/2	10~12	47.8	16	60	5
EX-NPT1-1/2-H5-11	NPT1-1/2	9~11	47.8	16	60	5
EX-NPT1-1/2-H6-10	NPT1-1/2	8~10	47.8	16	60	5
EX-NPT2-H2-15	NPT2	12~15	59.61	16	65	5
EX-NPT2-H3-14	NPT2	11~14	59.61	16	65	5
EX-NPT2-H4-13	NPT2	10~13	59.61	16	65	5
EX-NPT2-H5-12	NPT2	10~12	59.61	16	65	5
EX-NPT2-H6-10	NPT2	8~10	59.61	16	65	5
EX-G3/4-H2-08	G3/4	6~8	26.44	13	33	50
EX-G3/4-H3-07	G3/4	5~7	26.44	13	33	50
EX-G3/4-H4-06	G3/4	4~6	26.44	13	33	50
EX-G3/4-H5-05	G3/4	3~5	26.44	13	33	50
EX-G3/4-H6-05	G3/4	3~5	26.44	13	33	50
EX-G1-H2-10	G1	8~10	33.24	16	42	20
EX-G1-H3-10	G1	8~10	33.24	16	42	20
EX-G1-H4-09	G1	7~9	33.24	16	42	20
EX-G1-H5-08	G1	6~8	33.24	16	42	20
EX-G1-H6-07	G1	5~7	33.24	16	42	20
EX-G2-H2-15	G2	12~15	59.61	16	65	5
EX-G2-H3-14	G2	11~14	59.61	16	65	5
EX-G2-H4-12	G2	10~13	59.61	16	65	5
EX-G2-H5-10	G2	10~12	59.61	16	65	5
EX-G2-H6-08	G2	8~10	59.61	16	65	5


产品参数表/长牙款

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
EX-M20L-H2-06	M20×1.5	4~6	20	15	27	50
EX-M20L-H3-05	M20×1.5	3~5	20	15	27	50
EX-M20L-H4-04	M20×1.5	2~4	20	15	27	50
EX-M20L-H5-03	M20×1.5	1~3	20	15	27	50
EX-M20L-H6-03	M20×1.5	1~3	20	15	27	50
EX-M22L-H2-06	M22×1.5	4~6	22	15	27	50
EX-M22L-H3-05	M22×1.5	3~5	22	15	27	50
EX-M22L-H4-04	M22×1.5	2~4	22	15	27	50
EX-M22L-H5-03	M22×1.5	1~3	22	15	27	50
EX-M22L-H6-03	M22×1.5	1~3	22	15	27	50
EX-M25L-H2-08	M25×1.5	6~8	25	15	33	50
EX-M25L-H3-07	M25×1.5	5~7	25	15	33	50
EX-M25L-H4-06	M25×1.5	4~6	25	15	33	50
EX-M25L-H5-05	M25×1.5	3~5	25	15	33	50
EX-M25L-H6-05	M25×1.5	3~5	25	15	33	50
EX-M27L-H2-08	M27×2.0	6~8	27	15	33	50
EX-M27L-H3-07	M27×2.0	5~7	27	15	33	50
EX-M27L-H4-06	M27×2.0	4~6	27	15	33	50
EX-M27L-H5-05	M27×2.0	3~5	27	15	33	50
EX-M27L-H6-05	M27×2.0	3~5	27	15	33	50
EX-M32L-H2-10	M32×1.5	8~10	32	15	42	20
EX-M32L-H3-10	M32×1.5	8~10	32	15	42	20
EX-M32L-H4-09	M32×1.5	7~9	32	15	42	20
EX-M32L-H5-08	M32×1.5	6~8	32	15	42	20
EX-M32L-H6-07	M32×1.5	5~7	32	15	42	20
EX-M36L-H2-10	M36×2.0	8~10	36	15	42	20
EX-M36L-H3-10	M36×2.0	8~10	36	15	42	20
EX-M36L-H4-09	M36×2.0	7~9	36	15	42	20
EX-M36L-H5-08	M36×2.0	6~8	36	15	42	20
EX-M36L-H6-07	M36×2.0	5~7	36	15	42	20
EX-M40L-H2-13	M40×1.5	11~13	40	15	52	10
EX-M40L-H3-12	M40×1.5	10~12	40	15	52	10
EX-M40L-H4-11	M40×1.5	9~11	40	15	52	10
EX-M40L-H5-10	M40×1.5	8~10	40	15	52	10
EX-M40L-H6-08	M40×1.5	6~8	40	15	52	10

KL型-抗拉尼龙电缆防水接头

Tensile nylon cable waterproof gland

- 产品材料: 尼龙PA6
- 螺纹规格: M牙, PG牙, G牙, NPT牙
- 产品颜色: 黑色, 浅灰色, 蓝色
- 产品特性: 符合CE, ROHS2.0, IP68、UL94V-2
- 温度测试: -40℃~105℃, 短时可达120℃
- 产品特性: 密封件T型设计, 防水密封性好, 抗拉力超强
- 应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通
- 订购说明: 默认配扁垫片与螺母, 无需请说明

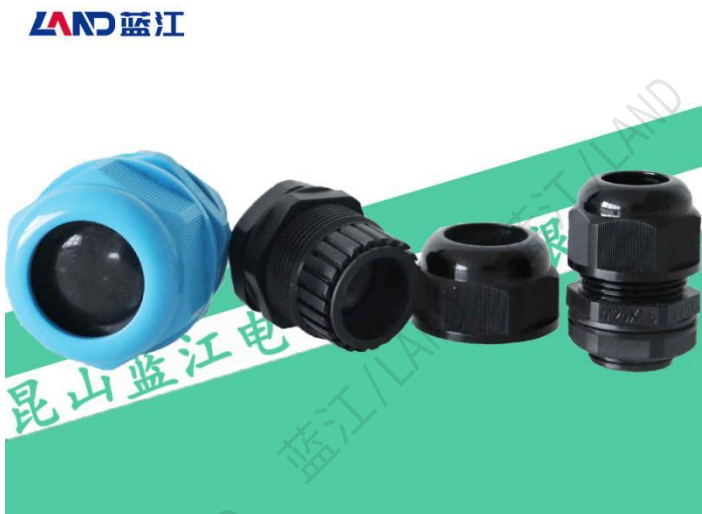

- Product Material: Nylon PA6
- Thread specification: M , PG , G , NPT
- Product color: Black, light gray, blue
- Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2
- Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time
- Product features: T-shaped design of sealing element, good waterproof sealing performance, and super strong tensile strength
- Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit
- Ordering instructions: Default flat washer and nut, no need to specify

产品参数表/G

蓝江产品型号	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Cable range	Hole size	Thread length	Wrench Size	packaging
PG.	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
KL-G3/8-10	6-10	16.66	10	22/22	50
KL-G3/8-07	3-7	16.66	10	22/22	50
KL-G1/2-12	6-12	20.955	10	27/24	50
KL-G1/2-09	5-9	20.955	10	27/24	50
KL-G3/4-18	12.5-18	26.44	12	33/33	50
KL-G3/4-13	7-13	26.44	12	33/33	50
KL-G1-25	18-25	33.2	13.5	42/41	20
KL-G1-22	15-22	33.2	13.5	42/41	20
KL-G1-1/4-32	24-32	41.9	15	51/50	10

产品参数表/M/PG

蓝江产品型号	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Cable range	Hole size	Thread length	Wrench Size	packaging
PG.	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
KL-M12S-06	3-6.5	12	8.5	18/15	50
KL-M12SL-06	3-6.5	12	15	18/15	50
KL-M12-08	4-8	12	8.5	18/19	50
KL-M12L-08	4-8	12	15	18/19	50
KL-M16S-08	4-8	16	10	22/19	50
KL-M16SL-08	4-8	16	15	22/19	50
KL-M16-10	6-10	16	10	22/22	50
KL-M16-07	3-7	16	10	22/22	50
KL-M16L-10	6-10	16	15	22/22	50
KL-M16L-07	3-7	16	15	22/22	50
KL-M18-10	6-10	18	10	24/22	50
KL-M18-07	3-7	18	10	24/22	50
KL-M18L-10	6-10	18	15	24/22	50
KL-M18L-07	3-7	18	15	24/22	50
KL-M20S-12	6-12	20	10	27/24	50
KL-M20S-09	5-9	20	10	27/24	50
KL-M20SL-12	6-12	20	15	27/24	50
KL-M20SL-09	5-9	20	15	27/24	50
KL-M20-14	8.5-14	20	10	27/27	50
KL-M20-11	6-11	20	10	27/27	50
KL-M20L-14	8-14	20	15	27/27	50
KL-M20L-11	6-11	20	15	27/27	50
KL-M22-14	8-14	22	11	30/27	50
KL-M22-11	6-11	22	11	30/27	50
KL-M22L-14	8-14	22	15	30/27	50
KL-M22L-11	6-11	22	15	30/27	50
KL-M25-18	12.5-18	25	11	33/33	50
KL-M25-13	7-13	25	11	33/33	50
KL-M25L-18	12.5-18	25	15	33/33	50
KL-M25L-13	7-13	25	15	33/33	50
KL-M32-25	18-25	32	12.5	41/41	20
KL-M32-22	15-22	32	12.5	41/41	20
KL-M32L-25	18-25	32	17.5	41/41	20
KL-M32L-22	15-22	32	17.5	41/41	20
KL-M40-32	24-32	40	15	50/52	10
KL-M40L-32	24-32	40	20	50/52	10
KL-M50-41	31-41	50	16	62/62	10
KL-M50L-41	31-41	50	22	62/62	10
KL-M63-45	35-45	63	18	74/68	10

产品参数表/PG

蓝江产品型号	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Cable range	Hole size	Thread length	Wrench Size	packaging
PG.	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
KL-PG7S-06	3-6.5	12.5	8.5	18/15	50
KL-PG7SL-06	3-6.5	12.5	15	18/15	50
KL-PG7-08	4-8	12.5	8.5	18/19	50
KL-PG7L-08	4-8	12.5	15	18/19	50
KL-PG9-08	4-8	15.2	9	22/19	50
KL-PG9L-08	4-8	12.5	15	22/19	50
KL-PG11-10	6-10	18.6	10	24/22	50
KL-PG11-07	3-7	18.6	10	24/22	50
KL-PG11L-10	6-10	18.6	15	24/22	50
KL-PG11L-07	3-7	18.6	15	24/22	50
KL-PG13.5-12	6-12	20.4	10	27/24	50
KL-PG13.5-09	5-9	20.4	10	27/24	50
KL-PG13.5L-12	6-12	20.4	15	27/24	50
KL-PG13.5L-09	5-9	20.4	15	27/24	50
KL-PG16-14	8-14	22.5	11	30/27	50
KL-PG16-11	6-11	22.5	11	30/27	50
KL-PG16L-14	8-14	22.5	15.5	30/27	50
KL-PG16L-11	6-11	22.5	15.5	30/27	50
KL-PG19-14	8-14	23.5	11	32/27	50
KL-PG19-11	6-11	23.5	11	32/27	50
KL-PG19L-14	8-14	23.5	15.5	32/27	50
KL-PG19L-11	6-11	23.5	15.5	32/27	50
KL-PG21-18	12.5-18	28.3	12	36/33	50
KL-PG21-13	7-13	28.3	12	36/33	50
KL-PG21L-18	12.5-18	28.3	15.5	36/33	50
KL-PG21L-13	7-13	28.3	15.5	36/33	50
KL-PG29-25	18-25	37	12.5	46/41	20
KL-PG29-22	14-22	37	12.5	46/41	20
KL-PG29L-25	18-25	37	17.5	46/41	20
KL-PG29L-22	14-22	37	17.5	46/41	20
KL-PG36-32	24-32	47	15	57/52	10
KL-PG36L-32	24-32	47	20	57/52	10
KL-PG42-41	31-41	54	16	64/62	10
KL-PG42-41	31-41	54	22	64/62	10
KL-PG48-45	35-45	59.3	15.5	70/65	10

B型连体-尼龙电缆防水接头/M

B-type Nylon cable waterproof gland/M

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)


产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

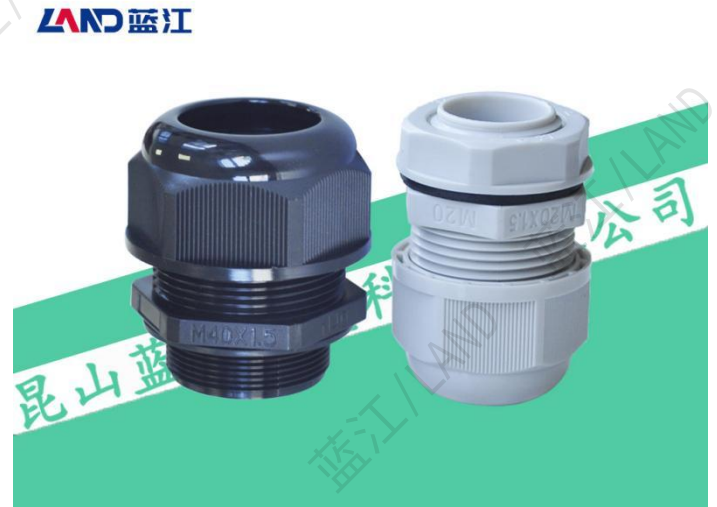

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

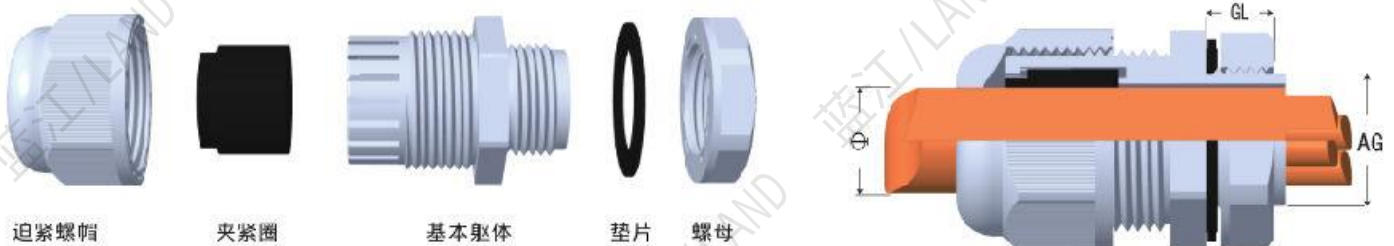

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG8B-04	M8×1.25	8	2~4.5	7.5	13/12	50
MG8B-02	M8×1.25	8	1~2	7.5	13/12	50
MG10B-06	M10×1.5	10	3~6	8	15/12	50
MG10B-03	M10×1.5	10	1.5~3	8	15/12	50
MG12B-08	M12×1.5	12	4~8	8.5	18/19	50
MG12B-05	M12×1.5	12	3~5	8.5	18/19	50
MG12B-03	M12×1.5	12	1.5~3	8.5	18/19	50
MG12BS-07	M12×1.5	12	3~6.5	8.5	18/15	50
MG12BS-05	M12×1.5	12	2.5~5.5	8.5	18/15	50
MG14B-08	M14×1.5	14	4~8	8.5	18/19	50
MG14B-05	M14×1.5	14	3~5	8.5	18/19	50
MG14B-03	M14×1.5	14	1.5~3	8.5	18/19	50
MG16B-10	M16×1.5	16	6~10	10	22/22	50
MG16B-07	M16×1.5	16	4~7	10	22/22	50
MG16BS-08	M16×1.5	16	4~8	10	22/19	50
MG16BS-05	M16×1.5	16	3~5	10	22/19	50
MG18B-10	M18×1.5	18	6~10	10	24/22	50
MG18B-07	M18×1.5	18	4~7	10	24/22	50
MG18DB-12	M18×1.5	18	7~12	10	24/24	50
MG18DB-09	M18×1.5	18	5~9	10	24/24	50
MG20B-14	M20×1.5	20	8~14	10	27/27	50
MG20B-11	M20×1.5	20	6~11	10	27/27	50
MG20B-07	M20×1.5	20	4~7	10	27/27	50
MG20BS-12	M20×1.5	20	6~12	10	27/24	50
MG20BS-09	M20×1.5	20	5~9	10	27/24	50
MG20BM-10	M20×1.5	20	6~10	10	27/22	50
MG20BM-07	M20×1.5	20	4~7	10	27/22	50
MG22B-14	M22×1.5	22	8~14	10	29/27	50
MG22B-11	M22×1.5	22	6~11	10	29/27	50
MG22B-07	M22×1.5	22	4~7	10	29/27	50
MG24B-14	M24×1.5	24	8~14	10	30/27	50
MG24B-11	M24×1.5	24	6~11	10	30/27	50
MG24B-07	M24×1.5	24	4~7	10	30/27	50
MG25B-18	M25×1.5	25	13~18	12	33/33	50
MG25B-13	M25×1.5	25	7~13	12	33/33	50
MG25B-08	M25×1.5	25	4~8	12	33/33	50

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG25BS-14	M25 $\times$ 1.5	25	8~14	12	33/27	50
MG25BS-11	M25 $\times$ 1.5	25	7~11	12	33/27	50
MG25BS-09	M25 $\times$ 1.5	25	5~9	12	33/27	50
MG25BS-07	M25 $\times$ 1.5	25	4~7	12	33/27	50
MG27B-18	M27 $\times$ 1.5/2.0	27	13~18	15	34/33	50
MG27B-13	M27 $\times$ 1.5/2.0	27	7~13	15	34/33	50
MG27B-08	M27 $\times$ 1.5/2.0	27	4~8	15	34/33	50
MG30B-25	M30 $\times$ 1.5	30	20~25	15	41/41	50
MG30B-20	M30 $\times$ 1.5	30	16~21	12	37/35	50
MG30B-15	M30 $\times$ 1.5	30	9~15	12	37/35	50
MG32B-25	M32 $\times$ 1.5	32	18~25	15	41/41	20
MG32B-22	M32 $\times$ 1.5	32	16~22	15	41/41	20
MG32B-18	M32 $\times$ 1.5	32	13~18	15	41/41	20
MG32B-12	M32 $\times$ 1.5	32	8~12	15	41/41	20
MG32BS-18	M32 $\times$ 1.5	32	13~18	15	41/33	20
MG32BS-16	M32 $\times$ 1.5	32	11~16	15	41/33	20
MG32BS-12	M32 $\times$ 1.5	32	6~12	15	41/33	20
MG36B-25	M36 $\times$ 1.5/2.0	36	18~25	12	45/41	20
MG36B-22	M36 $\times$ 1.5/2.0	36	16~22	12	45/41	20
MG36B-18	M36 $\times$ 1.5/2.0	36	13~18	12	45/41	20
MG36B-12	M36 $\times$ 1.5/2.0	36	8~12	12	45/41	20
MG40B-32	M40 $\times$ 1.5	40	24~32	20	50/50	10
MG40B-25	M40 $\times$ 1.5	40	18~25	20	50/50	10
MG40BS-25	M40 $\times$ 1.5	40	18~25	20	50/41	10
MG40BS-22	M40 $\times$ 1.5	40	16~22	20	50/41	10
MG40BS-18	M40 $\times$ 1.5	40	13~18	20	50/41	10
MG40BS-12	M40 $\times$ 1.5	40	6~12	20	50/41	10
MG42B-32	M42 $\times$ 2.0	42	24~32	15	52/50	10
MG42B-25	M42 $\times$ 2.0	42	18~25	15	52/50	10
MG48B-32	M48 $\times$ 2.0	48	31~41	16	50/50	10
MG48B-28	M48 $\times$ 2.0	48	22~28	16	50/50	10
MG50B-41	M50 $\times$ 1.5	50	31~41	22	62/62	10
MG50B-28	M50 $\times$ 1.5	50	22~28	22	62/62	10
MG56B-41	M56 $\times$ 2.0	56	31~41	16	64/50	10
MG56B-28	M56 $\times$ 2.0	56	22~28	16	64/50	10
MG60B-44	M60 $\times$ 2.0	60	35~45	18	72/75	10
MG63B-45	M63 $\times$ 1.5	63	35~45	18	75/65	10

B型连体-尼龙电缆防水接头/PG

B-type Nylon cable waterproof gland/PG

产品材料: 尼龙PA6

螺纹规格: 德制PG牙, 符合DIN40430标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: PG teeth, DIN40430 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



压紧螺帽



夹紧圈




基本躯体



垫片



螺母

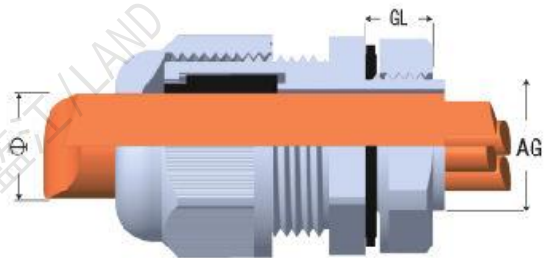

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
PG7B-08	PG7	12.5	4~8	8.5	17/19	50
PG7B-05	PG7	12.5	3~5	8.5	17/19	50
PG7B-03	PG7	12.5	1.5~3	8.5	17/19	50
PG7BS-07	PG7	12.5	3~6.5	8.5	17/15	50
PG7BS-05	PG7	12.5	2.5~5.5	8.5	17/15	50
PG9B-08	PG9	15.2	4~8	8.5	22/19	50
PG9B-05	PG9	15.2	3~5	8.5	22/19	50
PG9B-03	PG9	15.2	1.5~3	8.5	22/19	50
PG11B-10	PG11	18.6	6~10	10	22/22	50
PG11B-07	PG11	18.6	4~7	10	22/22	50
PG13.5B-12	PG13.5	20.4	6~12	10	27/24	50
PG13.5B-09	PG13.5	20.4	5~9	10	27/24	50
PG16B-14	PG16	22.5	8~14	11	30/27	50
PG16B-11	PG16	22.5	6~11	11	30/27	50
PG16B-07	PG16	22.5	4~7	11	30/27	50
PG19B-14	PG19	23.5	8~14	11	30/27	50
PG19B-11	PG19	23.5	6~11	11	30/27	50
PG19B-07	PG19	23.5	4~7	11	30/27	50
PG21B-18	PG21	28.3	13~18	12	36/33	50
PG21B-13	PG21	28.3	8~13	12	36/33	50
PG21B-08	PG21	28.3	4~8	12	36/33	50
PG25B-20	PG25	30	14~20	12.5	36/37	50
PG25B-15	PG25	30	10~15	12.5	36/37	50
PG29B-25	PG29	37	18~25	12	46/41	50
PG29B-22	PG29	37	16~22	12	46/41	50
PG29B-18	PG29	37	13~18	12	46/41	50
PG29B-12	PG29	37	7~12	12	46/41	50
PG36B-32	PG36	47	24~32	15	57/50	50
PG36B-25	PG36	47	18~25	15	57/50	50
PG42B-41	PG42	54	31~41	15.5	64/62	50
PG42B-28	PG42	54	22~28	15.5	64/62	50
PG48B-45	PG48	59.3	35~45	15.5	70/65	50

B型连体-尼龙电缆防水接头/G

B-type Nylon cable waterproof gland/G

产品材料: 尼龙PA6

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)


产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

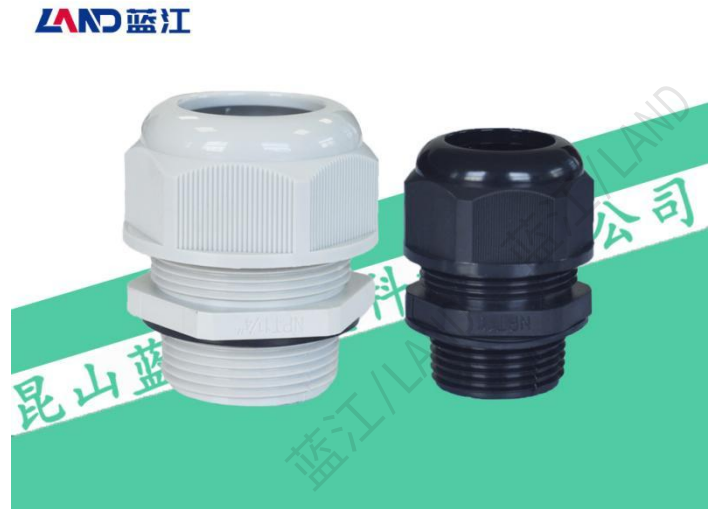

Product Material: Nylon PA6

Thread specification: G (PF) thread, GB/T706.1-2000 standard, NPT thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut (NPT without nuts) , no need to specify

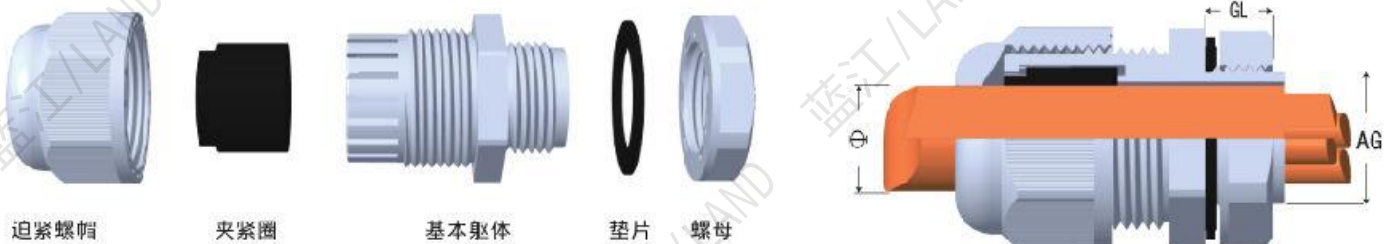

·产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
G1/4B-08	G1/4	13.15	4~8	8.5	19/19	50
G1/4B-05	G1/4	13.15	3~5	8.5	19/19	50
G1/4B-03	G1/4	13.15	2~3	8.5	19/19	50
G3/8B-10	G3/8	16.66	6~10	10	22/22	50
G3/8B-07	G3/8	16.66	4~7	10	22/22	50
G1/2B-12	G1/2	20.95	6~12	10	27/24	50
G1/2B-09	G1/2	20.95	5~9	10	27/24	50
G3/4B-18	G3/4	26.44	13~18	12	33/33	50
G3/4B-13	G3/4	26.44	7~13	12	33/33	50
G3/4B-08	G3/4	26.44	4~8	12	33/33	50
G1B-25	G1	33.2	18~25	13.5	42/41	20
G1B-22	G1	33.2	16~22	13.5	42/41	20
G1B-18	G1	33.2	13~18	13.5	42/41	20
G1B-12	G1	33.2	7~12	13.5	42/41	20
G1-1/4B-32	G1-1/4	41.9	24~32	15	51/50	10
G1-1/4B-25	G1-1/4	41.9	18~25	15	51/50	10
G1-1/2B-41	G1-1/2	47.8	31~41	16	62/62	10
G1-1/2B-28	G1-1/2	47.8	22~28	16	62/62	10
G2B-45	G2	59.6	35~45	25	75/75	10

B型连体-尼龙电缆防水接头/NPT

B-type Nylon cable waterproof gland/NPT

产品材料: 尼龙PA6

螺纹规格: 美制NPT牙, 符合GB/T706.1-2000标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母 (NPT不带螺母), 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: NPT thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut (NPT without nuts) , no need to specify



迫紧螺帽



夹紧圈




基本躯体



垫片



螺母

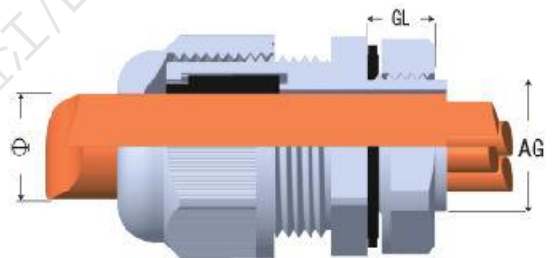

·产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
NPT1/4B-08	NPT1/4	13.15	4~8	8.5	19/19	50
NPT1/4B-05	NPT1/4	13.15	3~5	8.5	19/19	50
NPT1/4B-03	NPT1/4	13.15	2~3	8.5	19/19	50
NPT3/8B-10	NPT3/8	16.66	6~10	10	22	50
NPT3/8B-07	NPT3/8	16.66	4~7	10	22	50
NPT1/2B-12	NPT1/2	20.95	6~12	10	27	50
NPT1/2B-09	NPT1/2	20.95	5~9	10	27	50
NPT3/4B-18	NPT3/4	26.44	13~18	15	33	50
NPT3/4B-13	NPT3/4	26.44	7~13	15	33	50
NPT3/4B-08	NPT3/4	26.44	4~8	15	33	50
NPT1B-25	NPT1	33.5	18~25	17	41	20
NPT1B-22	NPT1	33.5	16~22	17	41	20
NPT1B-18	NPT1	33.5	13~18	17	41	20
NPT1B-12	NPT1	33.5	7~12	17	41	20
NPT1-1/4B-32	NPT1-1/4	42	24~32	17	50	10
NPT1-1/4B-25	NPT1-1/4	42	18~25	17	50	10
NPT1-1/2B-41	NPT1-1/2	48	31~41	17	52	10
NPT1-1/2B-28	NPT1-1/2	48	22~28	17	52	10
NPT2B-45	NPT2	60	35~45	20	68	10

加长尼龙电缆防水接头/M/PG

Long thread nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件连体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, PG thread

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Sealing element integrated design, good waterproof sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

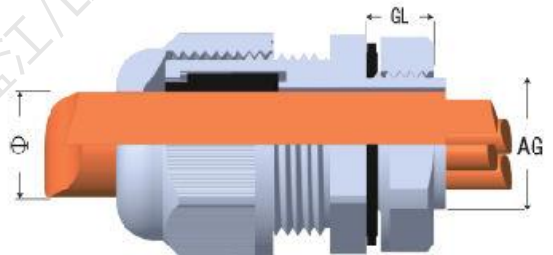

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG12BL-08	M12×1.5	4~8	12	15	18/19	50
MG12BL-05	M12×1.5	3~5	12	15	18/19	50
MG12BL-03	M12×1.5	1.5~3	12	15	18/19	50
MG12BSL-07	M12×1.5	3~6.5	12	15	18/15	50
MG12BSL-05	M12×1.5	2.5~5.5	12	15	18/15	50
MG16BL-10	M16×1.5	6~10	16	15	22/22	50
MG16BL-07	M16×1.5	4~7	16	15	22/22	50
MG16BSL-08	M16×1.5	4~8	16	15	22/19	50
MG16BSL-05	M16×1.5	3~5	16	15	22/19	50
MG18BL-10	M18×1.5	6~10	18	15	24/22	50
MG18BL-07	M18×1.5	4~7	18	15	24/22	50
MG20BL-14	M20×1.5	8~14	20	15	27/27	50
MG20BL-11	M20×1.5	6~11	20	15	27/27	50
MG20BL-07	M20×1.5	4~7	20	15	27/27	50
MG20BSL-12	M20×1.5	6~12	20	15	27/24	50
MG20BSL-09	M20×1.5	5~9	20	15	27/24	50
MG22BL-14	M22×1.5	8~14	22	15	30/27	50
MG22BL-11	M22×1.5	6~11	22	15	30/27	50
MG25BL-18	M25×1.5	13~18	25	15	33/33	50
MG25BL-16	M25×1.5	11~16	25	15	33/33	50
MG25BL-13	M25×1.5	7~13	25	15	33/33	50
MG25BL-08	M25×1.5	4~8	25	15	33/33	50
MG25BSL-14	M25×1.5	8~14	25	15	33/27	50
MG25BSL-11	M25×1.5	6~11	25	15	33/27	50
MG32BL-25	M32×1.5	18-25	32	17.5	41/41	20
MG32BL-22	M32×1.5	16-22	32	17.5	41/41	20
MG40BL-32	M40×1.5	24-32	40	20	50/52	10

·产品参数表/PG

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7BL-08	PG7	4~8	12.5	15	17/19	50
PG7BL-05	PG7	3~5	12.5	15	17/19	50
PG7BSL-07	PG7	3~6.5	12.5	15	17/15	50
PG7BSL-05	PG7	2.5~5.5	12.5	15	17/15	50
PG9BL-08	PG9	4~8	15.2	15	22/19	50
PG9BL-05	PG9	3~5	15.2	15	22/19	50
PG11BL-10	PG11	6~10	18.6	15	22/22	50
PG11BL-07	PG11	4~7	18.6	15	22/22	50
PG13.5BL-12	PG13.5	6~12	20.4	15	27/24	50
PG13.5BL-09	PG13.5	5~9	20.4	15	27/24	50
PG16BL-14	PG16	8~14	22.5	15	30/27	50
PG16BL-11	PG16	6~11	22.5	15	30/27	50
PG16BL-07	PG16	4~7	22.5	15	30/27	50
PG19BL-14	PG19	8~14	23.5	15	32/27	50
PG19BL-11	PG19	6~11	23.5	15	32/27	50
PG21BL-18	PG21	13~18	28.3	15	36/33	50
PG21BL-16	PG21	11~16	28.3	15	36/33	50
PG21BL-13	PG21	8~13	28.3	15	36/33	50
PG21BL-08	PG21	4~8	28.3	15	36/33	50
PG29BL-25	PG29	18~25	37	15	46/41	20
PG29BL-22	PG29	16~22	37	15	46/41	20
PG29BL-18	PG29	13~18	37	15	46/41	20
PG29BL-12	PG29	7~12	37	15	46/41	20
PG36BL-32	PG36	24~32	57	20	57/52	10

A型分体-尼龙电缆防水接头/M

A-type Nylon cable waterproof gland/M

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件分体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

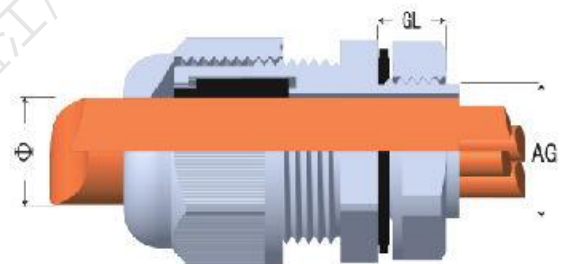

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG12A-08	M12×1.5	4~8	12	8.5	18/19	50
MG12A-05	M12×1.5	3~5	12	8.5	18/19	50
MG12A-03	M12×1.5	2~3	12	8.5	18/19	50
MG12A-6.5	M12×1.5	3.5~6.5	12	8.5	18/19	50
MG12A-6.7	M12×1.5	3.5~6.7	12	8.5	18/19	50
MG16A-10	M16×1.5	6~10	16	15	22/22	50
MG16A-07	M16×1.5	4~7	16	15	22/22	50
MG16A-05	M16×1.5	3~5	16	15	22/22	50
MG16A-04	M16×1.5	2~4	16	15	22/22	50
MG16AS-08	M16×1.5	4~8	16	10	22/19	50
MG16AS-05	M16×1.5	3~5	16	10	22/19	50
MG16AS-03	M16×1.5	3~5	16	10	22/19	50
MG16AS-6.5	M16×1.5	3.5~6.5	16	10	22/19	50
MG16AS-6.7	M16×1.5	3.5~6.7	16	10	22/19	50
MG16DA-11	M16×1.5	6~11	16	15	22/27	50
MG18A-14	M18×1.5	8.5-14	18	15	24/27	50
MG20A-14	M20×1.5	8~14	20	15	27/27	50
MG20A-11	M20×1.5	6~11	20	15	27/27	50
MG20A-06	M20×1.5	3~6.5	20	15	27/27	50
MG20AS-12	M20×1.5	6~12	20	10	27/24	50
MG20AS-11	M20×1.5	5~10.5	20	10	27/24	50
MG20AS-09	M20×1.5	5~9	20	10	27/24	50
MG20DA-15	M20×1.5	13-15	20	15	27/33	50
MG22A-14	M22×1.5	8~14	22	10	29/27	50
MG22A-11	M22×1.5	6~11	22	10	29/27	50
MG22A-6.5	M22×1.5	3~6.5	22	10	29/27	50
MG24A-18	M24×1.5	13~18	24	10	29/33	50
MG24A-16	M24×1.5	10~16	24	10	29/33	50
MG24A-14	M24×1.5	8~14	24	10	29/33	50
MG24A-10	M24×1.5	6~10	24	10	29/33	50

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG25A-18	M25×1.5	13~18	25	15	33/33	50
MG25A-16	M25×1.5	10~16	25	15	33/33	50
MG25A-14	M25×1.5	8~14	25	15	33/33	50
MG25A-10	M25×1.5	6~10	25	15	33/33	50
MG25A-09	M25×1.5	5~9	25	15	33/33	50
MG25A-08	M25×1.5	4~8	25	15	33/33	50
MG25A-06	M25×1.5	3~6	25	15	33/33	50
MG25AS-14	M25×1.5	8~14	25	12	33/27	50
MG25AS-11	M25×1.5	6~11	25	12	33/27	50
MG25AS-06	M25×1.5	3~6.5	25	12	33/27	50
MG32A-25	M32×1.5	18~25	32	15	41/41	20
MG32A-22	M32×1.5	16~22	32	15	41/41	20
MG32A-06	M32×1.5	3~5.5	32	15	41/41	20
MG40A-31	M40×1.5	24~31	40	20	50/50	10
MG40A-25	M40×1.5	18~25	40	20	50/50	10
MG50A-41	M50×1.5	31~41	50	22	62/62	10
MG50A-33	M50×1.5	26~33	50	22	62/62	10
MG63A-51	M63×1.5	44~51	63	25	75/78	10
MG63A-46	M63×1.5	39~46	63	25	75/78	10
MG63A-35	M63×1.5	28~35	63	25	75/78	10
MG72A-54B	M72×2.0	44~54	72	25	83/76	1
MG75A-66	M75×2.0	56~66	75	25	92/92	1
MG75A-62	M75×2.0	56~62	75	25	92/92	1
MG75A-56	M75×2.0	50~56	75	25	92/92	1
MG80A-66	M80×2.0	56~66	80	25	91/92	1
MG90A-77	M90×2.0	66~77	90	25	110/110	1
MG90A-68	M90×2.0	58~68	90	25	110/110	1

A型分体-尼龙电缆防水接头/PG

A-type Nylon cable waterproof gland/PG

产品材料: 尼龙PA6

螺纹规格: 德制PG牙, 符合DIN40430标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 密封件分体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明



Product Material: Nylon PA6

Thread specification: PG teeth, DIN40430 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

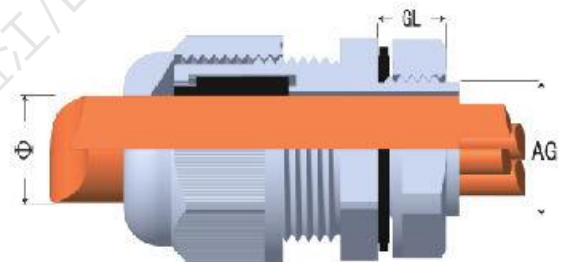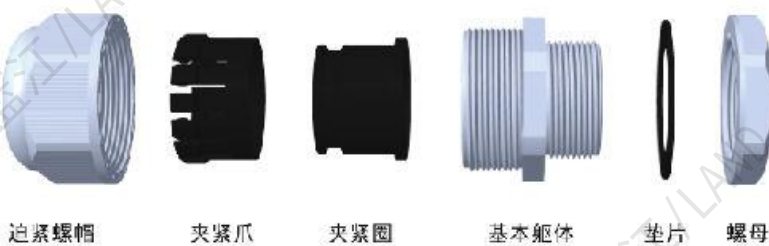

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7A-08	PG7	4~8	12.5	8.5	17/19	50
PG7A-05	PG7	3~5	12.5	8.5	17/19	50
PG7A-03	PG7	2~3	12.5	8.5	17/19	50
PG7A-6.7	PG7	3~6.7	12.5	8.5	17/19	50
PG7A-6.5	PG7	3~6.5	12.5	8.5	17/19	50
PG9A-08	PG9	4~8	15.2	8.5	22/19	50
PG9A-05	PG9	3~5	15.2	8.5	22/19	50
PG9A-03	PG9	2~3	15.2	8.5	22/19	50
PG9A-6.7	PG9	3~6.7	12.5	8.5	17/19	50
PG9A-6.5	PG9	3~6.5	12.5	8.5	17/19	50
PG9DA-10	PG9	6~10	12.5	9.3	22/22	50
PG11A-10	PG11	6~10	18.6	10	22/22	50
PG11A-07	PG11	4~7	18.6	10	22/22	50
PG11A-05	PG11	3~5	18.6	10	22/22	50
PG11A-04	PG11	2~4	18.6	10	22/22	50
PG13.5A-12	PG13.5	6~12	20.4	10	27/24	50
PG13.5A-11	PG13.5	6.5~10.5	20.4	10	27/24	50
PG13.5A-09	PG13.5	5~9	20.4	10	27/24	50
PG13.5DA-14	PG13.5	8.5-14	20.4	10.8	27/27	50
PG16A-14	PG16	8~14	22.5	11	30/27	50
PG16A-11	PG16	6~11	22.5	11	30/27	50
PG16A-06	PG16	3~6.5	22.5	11	30/27	50
PG21A-18	PG21	13~18	28.3	12	36/33	50
PG21A-16	PG21	10~16	28.3	12	36/33	50
PG21A-14	PG21	8~14	28.3	12	36/33	50
PG21A-13	PG21	7~13	28.3	12	36/33	50
PG21A-10	PG21	6~10	28.3	12	36/33	50
PG21A-09	PG21	6~9	28.3	12	36/33	50
PG21A-08	PG21	4~8	28.3	12	36/33	50
PG21A-06	PG21	3~6.5	28.3	12	36/33	50
PG29A-25	PG29	18~25	37	12	46/41	20
PG29A-22	PG29	16~22	37	12	46/41	20
PG36A-31	PG36	24~31	47	15	57/50	10
PG36A-25	PG36	18~25	47	15	57/50	10
PG42A-41	PG42	31~41	54	15.5	64/62	10
PG42A-33	PG42	26~33	54	15.5	64/62	10
PG48A-51	PG48	44~51	59.3	16	75/78	10
PG48A-46	PG48	39~46	59.3	16	75/78	10
PG48A-35	PG48	28~35	59.3	16	75/78	10

A型分体-尼龙电缆防水接头/G(PF)

A-type Nylon cable waterproof gland/G(PF)

产品材料: 尼龙PA6

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 密封件分体式设计, 防水密封性好, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: G (PF) thread, GB/T706.1-2000 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Split type design of sealing element, good waterproof and sealing performance, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



压紧螺帽



夹紧爪



夹紧圈




基本躯体



垫片



螺母

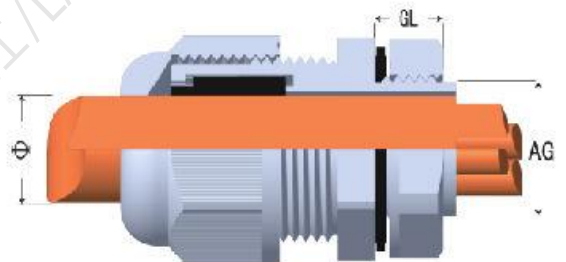

产品参数表/G

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08	G1/4	4~8	13.15	8.5	19/19	50
G1/4A-05	G1/4	3~5	13.15	8.5	19/19	50
G1/4A-03	G1/4	2~3	13.15	8.5	19/19	50
G1/4A-6.5	G1/4	3~6.5	13.15	8.5	19/19	50
G1/4A-6.7	G1/4	3~6.7	13.15	8.5	19/19	50
G3/8A-10	G3/8	6~10	16.66	15	22/22	50
G3/8A-07	G3/8	4~7	16.66	15	22/22	50
G3/8A-05	G3/8	3~5	16.66	15	22/22	50
G3/8A-04	G3/8	2~4	16.66	15	22/22	50
G1/2A-12	G1/2	6~12	20.95	10	27/24	50
G1/2A-10	G1/2	5.5~10	20.95	10	27/24	50
G1/2A-09	G1/2	5~9	20.95	10	27/24	50
G1/2AL-14	G1/2	8~14	20.95	15	30/27	50
G1/2AL-11	G1/2	6~11	20.95	15	30/27	50
G1/2AL-06	G1/2	3~6.5	20.95	15	30/27	50
G3/4A-18	G3/4	13~18	26.44	15	33/33	50
G3/4A-16	G3/4	10~16	26.44	15	33/33	50
G3/4A-14	G3/4	8~14	26.44	15	33/33	50
G3/4A-13	G3/4	7~13	26.44	15	33/33	50
G3/4A-10	G3/4	6~10	26.44	15	33/33	50
G3/4A-09	G3/4	6~9	26.44	15	36/33	50
G3/4A-08	G3/4	4~8	26.44	15	36/33	50
G3/4A-06	G3/4	3~6.5	26.44	15	36/33	50
G1A-25	G1	18~25	33.2	15	42/41	20
G1A-22	G1	16~22	33.2	15	42/41	20
G1-1/4A-31	G1-1/4	24~31	41.9	16	51/50	10
G1-1/4A-25	G1-1/4	18~25	41.9	16	51/50	10
G1-1/2A-41	G1-1/2	31~41	47.8	22	62/62	10
G1-1/2A-33	G1-1/2	26~33	47.8	22	62/62	10
G2A-51	G2	44~51	59.6	25	75/75	10
G2A-46	G2	39~46	59.6	25	75/75	10
G2A-35	G2	28~35	59.6	25	75/75	10

扁孔尼龙电缆防水接头

Flat hole Nylon cable waterproof gland

产品材料：尼龙PA6

螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)


产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：扁形密封圈设计，可锁紧扁电缆与伴热带

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

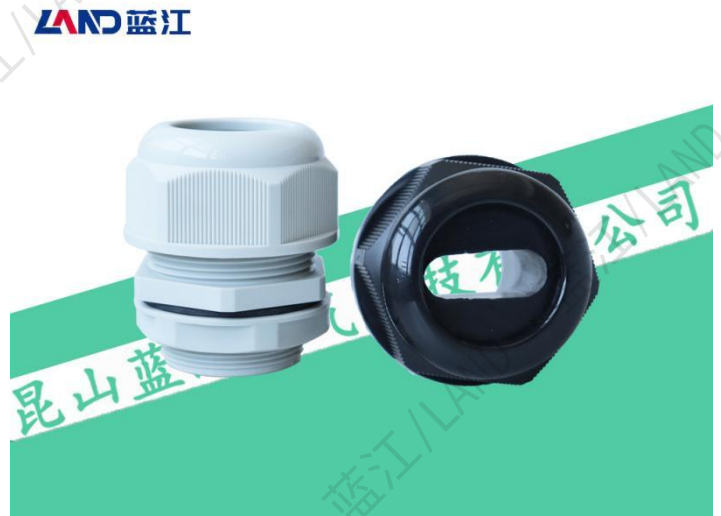

Product Material: Nylon PA6

Thread specification: metric M-thread, PG, G(PF)-thread

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Flat sealing ring, capable of locking flat cables and heat tracing tape

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

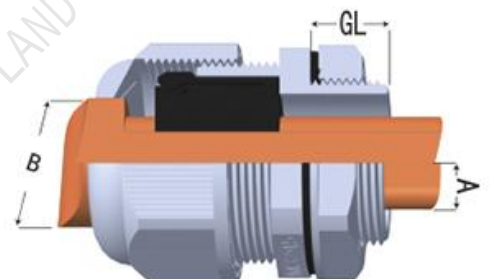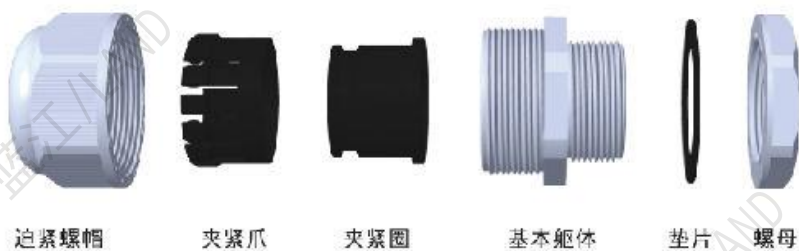

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG10B-0306	M10×1.5	3*6	10	8	12/15	50
MG20B-0308	M20×1.5	3*8	20	15	27/27	50
MG20B-0509	M20×1.5	5*9	20	15	27/27	50
MG20A-0410	M20×1.5	4*10	20	15	27/27	50
MG20A-0612	M20×1.5	6*12	20	15	27/27	50
MG20A-0814	M20×1.5	8*14	20	15	27/27	50
MG20AS-0712	M20×1.5	7*12	20	10	27/24	50
MG20AS-0508	M20×1.5	5*8	20	10	27/24	50
MG22B-0308	M22×1.5	3*8	22	10	29/27	50
MG22B-0509	M22×1.5	5*9	22	10	29/27	50
MG22A-0410	M22×1.5	4*10	22	10	29/27	50
MG22A-0612	M22×1.5	6*12	22	10	29/27	50
MG22A-0814	M22×1.5	8*14	22	10	29/27	50
MG24B-0308	M24×1.5	3*8	24	10	30/27	50
MG24B-0509	M24×1.5	5*9	24	10	30/27	50
MG24B-0714	M24×1.5	7*14	24	10	30/27	50
MG24A-0614	M24×1.5	6*14	24	15	30/33	50
MG25A-0614	M25×1.5	6*14	32	15	33/33	50
MG25AS-0410	M25×1.5	25	4*10	12	33/27	50
MG25AS-0612	M25×1.5	25	6*12	12	33/27	50
MG25AS-0814	M25×1.5	14	8*14	12	33/27	50
MG25BS-0308	M25×1.5	25	3*8	12	33/27	50
MG25BS-0509	M25×1.5	25	5*9	12	33/27	50
MG25BS-0714	M25×1.5	25	7*14	12	33/27	50
MG32A-0519	M32×1.5	5*9	40	15	41/41	20
MG32AS-0511	M32×1.5	32	5*11	15	41/33	50
MG32AS-0614	M32×1.5	32	7*14	15	41/33	50
MG40A-1230	M40×1.5	12*30	40	20	50/50	10
MG50A-1334	M50×1.5	12*34	50	22	62/62	10
MG63A-1641 (双层芯)	M63×1.5	20*44	63	25	75/78	10
MG63A-2044	M63×1.5	20*44	63	25	75/78	10
MG63A-2055	M63×1.5	20*55	63	25	75/78	10

产品参数表/PG/G

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	φ mm	AG φ mm	GL mm	nut/cap mm	PCS
PG13. 5A-0508	PG13. 5	5*8	20. 4	10	27/24	50
PG13. 5A-0712	PG13. 5	7*12	20. 4	10	27/24	50
PG16B-0308	PG16	3*8	22. 5	11	30/27	50
PG16B-0509	PG16	3*8	22. 5	11	30/27	50
PG16A-0410	PG16	4*10	22. 5	11	30/27	50
PG16A-0612	PG16	6*12	22. 5	11	30/27	50
PG16A-0814	PG16	8*14	22. 5	11	30/27	50
PG19B-0308	PG19	3*8	23. 8	11	30/27	50
PG19B-0509	PG19	5*9	23. 8	11	30/27	50
PG21A-0614	PG21	6*14	28. 3	12	36/33	50
PG29A-0519	PG29	5*9	37	12	46/41	20
PG36A-1230	PG36	12*30	47	15	57/50	10
PG42A-1334	PG42	12*34	47	15. 5	64/62	10
PG48A-1641 (双层芯)	PG48	16*41	59. 3	16	75/78	10
PG48A-2044	PG48	20*44	59. 3	16	75/78	10
PG48A-2055	PG48	20*44	59. 3	16	75/78	10
G1/2A-0410	G1/2	4*10	20. 4	15	30/27	50
G1/2A-0612	G1/2	6*12	20. 4	15	30/27	50
G1/2A-0814	G1/2	8*14	20. 4	15	30/27	50
G3/4A-0614	G3/4	6*14	26. 66	15	33/33	50
G1A-0519	G1	5*9	33. 2	15	42/41	20
G1-1/4A-1230	G1-1/4	12*30	41. 9	16	51/50	10
G1-1/2A-1334	G1-1/2	12*34	47. 8	22	62/62	10
G2A-1042 (双层芯)	G2	10*42	59. 6	25	75/75	10
G2A-2044	G2	20*44	59. 6	25	75/75	10
G2A-2055	G2	20*55	59. 6	25	75/75	10

二孔分体尼龙电缆防水接头

Two holes Nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

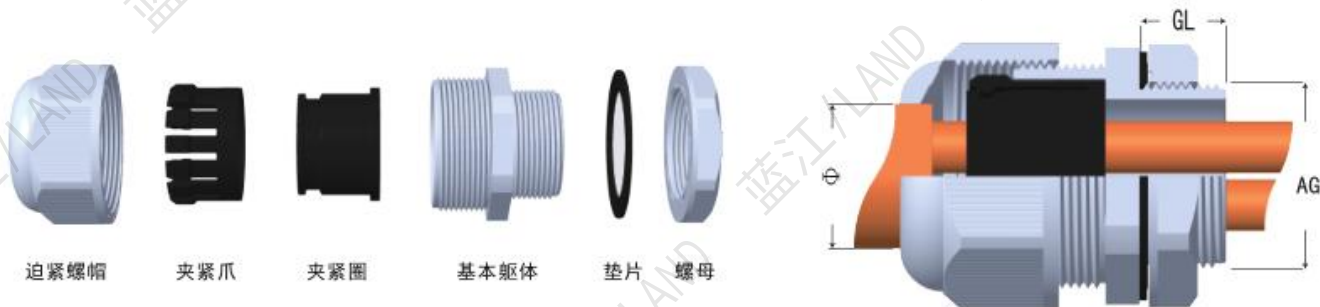

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG12A-H2-03	M12×1.5	1.5~3	12	8.5	18/19	50
MG16AS-H2-03	M16×1.5	1.5~3	16	10	22/19	50
MG16A-H2-02	M16×1.5	1.5~2.6	16	15	22/22	50
MG16A-H2-04	M16×1.5	2~4	16	15	22/22	50
MG20AS-H2-05	M20×1.5	2~5	20	10	27/24	50
MG20A-H2-03	M20×1.5	1.5~3	20	15	27/27	50
MG20A-H2-04	M20×1.5	2~4	20	15	27/27	50
MG20A-H2-05	M20×1.5	2~5	20	15	27/27	50
MG20A-H2-06	M20×1.5	3~6	20	15	27/27	50
MG20A-H2-07	M20×1.5	4~7	20	15	27/27	50
MG22A-H2-03	M22×1.5	1.5~3	22	10	29/27	50
MG22A-H2-04	M22×1.5	2~4	22	10	29/27	50
MG22A-H2-05	M22×1.5	2~5	22	10	29/27	50
MG22A-H2-06	M22×1.5	3~6	22	10	29/27	50
MG22A-H2-07	M22×1.5	4~7	22	10	29/27	50
MG25AS-H2-03	M25×1.5	1.5~3	25	12	33/27	50
MG25AS-H2-04	M25×1.5	2~4	25	12	33/27	50
MG25AS-H2-05	M25×1.5	2~5	25	12	33/27	50
MG25AS-H2-06	M25×1.5	3~6	25	12	33/27	50
MG25AS-H2-07	M25×1.5	4~7	25	12	33/27	50
MG25A-H2-05	M25×1.5	3~5.5	25	15	33/33	50
MG25A-H2-06	M25×1.5	3~6	25	15	33/33	50
MG25A-H2-08	M25×1.5	5~8	25	15	33/33	50
MG25A-H2-09	M25×1.5	6~9	25	15	33/33	50
MG32A-H2-10	M32×1.5	6~10	32	15	41/41	20
MG32A-H2-12	M32×1.5	9~12	32	15	41/41	20
MG40A-H2-13	M40×1.5	9~13	40	20	50/50	10
MG50A-H2-15	M50×1.5	11~15	50	22	62/62	10
MG63A-H2-17	M63×1.5	14~17	63	25	75/78	10

产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7A-H2-03	PG7	1.5~3	12.5	8.5	17/19	50
PG9A-H2-03	PG9	1.5~3	15.2	8.5	22/19	50
PG11A-H2-02	PG11	1.5~2.6	18.6	10	22/22	50
PG11A-H2-04	PG11	2~4	18.6	10	22/22	50
PG13.5A-H2-05	PG13.5	2~5	20.4	10	27/24	50
PG16A-H2-03	PG16	1.5~3	22.5	11	30/27	50
PG16A-H2-04	PG16	2~4	22.5	11	30/27	50
PG16A-H2-05	PG16	2~5	22.5	11	30/27	50
PG16A-H2-06	PG16	3~6	22.5	11	30/27	50
PG16A-H2-07	PG16	4~7	22.5	11	30/27	50
PG21A-H2-05	PG21	2~5	28.3	12	36/33	50
PG21A-H2-06	PG21	3~6	28.3	12	36/33	50
PG21A-H2-08	PG21	5~8	28.3	12	36/33	50
PG21A-H2-09	PG21	6~9	28.3	12	36/33	50
PG29A-H2-10	PG29	6~10	37	12	46/41	20
PG29A-H2-12	PG29	9~12	37	12	46/41	20
PG36A-H2-13	PG36	9~13	47	15	57/50	10
PG42A-H2-15	PG42	11~15	54	15.5	64/62	10
PG48A-H2-17	PG48	14~17	59.3	16	75/78	10
G1/4A-H2-03	G1/4	1.5~3	13.15	8.5	19/19	50
G3/8A-H2-02	G3/8	1.5~2.6	16.66	15	22/22	50
G3/8A-H2-04	G3/8	2~4	16.66	15	22/22	50
G1/2A-H2-03	G1/2	1.5~3	20.95	15	27/27	50
G1/2A-H2-04	G1/2	2~4	20.95	15	27/27	50
G1/2A-H2-05	G1/2	2~5	20.95	15	27/27	50
G1/2A-H2-06	G1/2	3~6	20.95	15	27/27	50
G1/2AD-H2-08	G1/2	5~8	20.95	15	27/33	50
G3/4A-H2-05	G3/4	3~5.5	26.44	15	33/33	50
G3/4A-H2-06	G3/4	3~6	26.44	15	33/33	50
G3/4A-H2-08	G3/4	5~8	26.44	15	33/33	50
G1A-H2-10	G1	6~10	33.2	15	42/41	20
G1A-H2-12	G1	8~12	33.2	15	42/41	20
G1-1/4A-H2-13	G1-1/4	9~13	41.9	16	51/50	10
G1-1/2A-H2-15	G1-1/2	11~15	47.8	22	62/62	10
G2A-H2-17	G2	14~17	59.6	25	75/75	10

三孔分体尼龙电缆防水接头

Three holes Nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

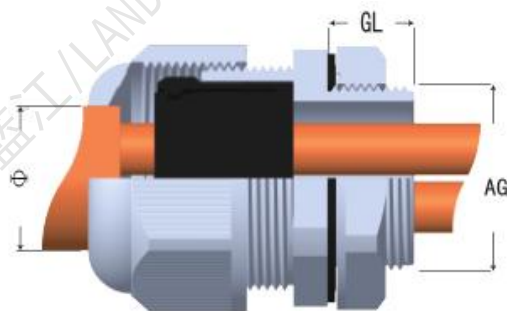

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	φ mm	AG φ mm	GL mm	nut/cap mm	PCS
MG12A-H3-02	M12×1.5	1~2.6	12	8.5	18/19	50
MG16AS-H3-02	M16×1.5	1~2.6	16	10	22/19	50
MG16A-H3-03	M16×1.5	1.5~3	20	15	22/22	50
MG16A-H3-04	M16×1.5	2~4	20	15	22/22	50
MG20AS-H3-05	M20×1.5	2~5	20	10	27/24	50
MG20A-H3-03	M20×1.5	1.5~3	20	15	27/27	50
MG20A-H3-05	M20×1.5	2~5	20	15	27/27	50
MG20A-H3-06	M20×1.5	3~6	20	15	27/27	50
MG22A-H3-03	M22×1.5	1.5~3	22	10	29/27	50
MG22A-H3-05	M22×1.5	2~5	22	10	29/27	50
MG22A-H3-06	M22×1.5	3~6	22	10	29/27	50
MG25A-H3-05	M25×1.5	2~5	25	15	33/33	50
MG25A-H3-06	M25×1.5	3~6	25	15	33/33	50
MG25A-H3-07	M25×1.5	4~7	25	15	33/33	50
MG25A-H3-08	M25×1.5	5~8	25	15	33/33	50
MG32A-H3-10	M32×1.5	6~10	32	15	41/41	20
MG40A-H3-11	M40×1.5	8~11	40	20	50/50	10
MG40A-H3-13	M40×1.5	10~13	40	20	50/50	10
MG40A-H3-14	M40×1.5	11~14	40	20	50/50	10
MG50A-H3-12	M50×1.5	9~12	50	22	62/62	10
MG63A-H3-13	M63×1.5	9~13	63	25	75/78	10

·产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7A-H3-02	PG7	1~2.6	12.5	8.5	17/19	50
PG9A-H3-02	PG9	1~2.6	15.2	8.5	22/19	50
PG11A-H3-03	PG11	1.5~3	18.6	10	22/22	50
PG11A-H3-04	PG11	2~4	18.6	10	22/22	50
PG13.5A-H3-05	PG13.5	2~5	20.4	10	27/24	50
PG16A-H3-03	PG16	1.5~3	28.3	11	30/27	50
PG16A-H3-05	PG16	2~5	22.5	11	30/27	50
PG16A-H3-06	PG16	3~6	22.5	11	30/27	50
PG21A-H3-05	PG21	2~5	28.3	12	36/33	50
PG21A-H3-06	PG21	3~6	28.3	12	36/33	50
PG21A-H3-07	PG21	4~7	28.3	12	36/33	50
PG21A-H3-08	PG21	5~8	28.3	12	36/33	50
PG29A-H3-10	PG29	6~10	37	12	46/41	20
PG36A-H3-11	PG36	8~11	47	15	57/50	10
PG36A-H3-13	PG36	10~13	47	15	57/50	10
PG36A-H3-14	PG36	11~14	47	15	57/50	10
PG42A-H3-12	PG42	9~12	54	15.5	64/62	10
PG48A-H3-13	PG48	9~13	59.3	16	75/78	10
G1/4A-H3-02	G1/4	1~2.6	13.15	8.5	19/19	50
G3/8A-H3-04	G3/8	2~4	16.66	15	22/22	50
G1/2A-H3-03	G1/2	1.5~3	20.95	10	27/27	50
G1/2A-H3-05	G1/2	2~5	20.95	10	27/27	50
G1/2A-H3-06	G1/2	3~6	20.95	10	27/27	50
G1/2AD-H3-08	G1/2	5~8	20.95	15	27/33	50
G3/4A-H3-05	G3/4	2~5	26.44	15	33/33	50
G3/4A-H3-06	G3/4	3~6	26.44	15	33/33	50
G3/4A-H3-07	G3/4	4~7	26.44	15	33/33	50
G3/4A-H3-08	G3/4	5~8	26.44	15	33/33	50
G1A-H3-10	G1	6~10	33.2	15	42/41	20
G1-1/4A-H3-11	G1-1/4	8~11	41.9	16	51/50	10
G1-1/4A-H3-13	G1-1/4	10~13	41.9	16	51/50	10
G1-1/4A-H3-14	G1-1/4	11~14	41.9	16	51/50	10
G1-1/2A-H3-12	G1-1/2	9~12	47.8	22	62/62	10
G2A-H3-13	G2	9~13	59.6	25	75/75	10

四孔分体尼龙电缆防水接头

Four holes Nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

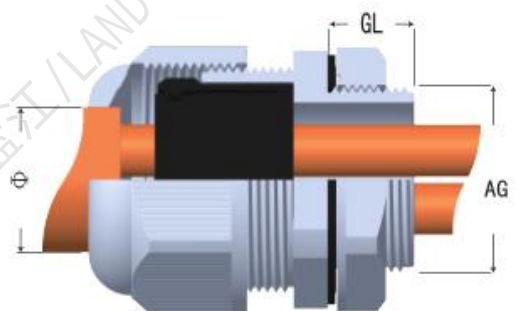

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG12A-H4-02	M12×1.5	1~2.3	12	8.5	18/19	50
MG16AS-H4-02	M16×1.5	1~2.6	16	10	22/19	50
MG16A-H4-03	M16×1.5	1.5~3	16	15	22/22	50
MG20AS-H4-04	M20×1.5	2~4	20	10	27/24	50
MG20A-H4-03	M20×1.5	1~2.5	20	15	27/27	50
MG20A-H4-04	M20×1.5	1.5~3.5	20	15	27/27	50
MG20A-H4-05	M20×1.5	2~4.5	20	15	27/27	50
MG22A-H4-03	M22×1.5	1~2.5	22	10	29/27	50
MG22A-H4-04	M22×1.5	1.5~3.5	22	10	29/27	50
MG22A-H4-05	M22×1.5	2~4.5	22	10	29/27	50
MG25A-H4-05	M25×1.5	2~5	25	15	33/33	50
MG25A-H4-06	M25×1.5	3~6	25	15	33/33	50
MG25A-H4-07	M25×1.5	4~7	25	15	33/33	50
MG25A-H4-08	M25×1.5	5~8	25	15	33/33	50
MG32A-H4-07	M32×1.5	4~7	32	15	41/41	20
MG32A-H4-09	M32×1.5	6~9	32	15	41/41	20
MG40A-H4-11	M40×1.5	8~11	40	20	50/50	10
MG40A-H4-12	M40×1.5	9~12	40	20	50/50	10

产品参数表/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7A-H4-02	PG7	1~2.3	12.5	8.5	17/19	50
PG9A-H4-02	PG9	1~2.3	15.2	8.5	22/19	50
PG11A-H4-03	PG11	1.5~3	18.6	10	22/22	50
PG13.5A-H4-04	PG13.5	2~4	20.4	10	27/24	50
PG16A-H4-03	PG16	1~2.5	22.5	11	30/27	50
PG16A-H4-04	PG16	1.5~3.5	22.5	11	30/27	50
PG16A-H4-05	PG16	2~4.5	22.5	11	30/27	50
PG21A-H4-05	PG21	2~5	28.6	12	36/33	50
PG21A-H4-06	PG21	3~6	28.6	12	36/33	50
PG21A-H4-07	PG21	4~7	28.6	12	36/33	50
PG21A-H4-08	PG21	5~8	28.6	12	36/33	50
PG21A-H4-09	PG21	6~9	28.6	12	36/33	50
PG29A-H4-07	PG29	4~7	37	12	46/41	20
PG29A-H4-09	PG29	6~9	37	12	46/41	20
PG36A-H4-11	PG36	8~11	47	15	57/50	10
PG36A-H4-12	PG36	9~12	47	15	57/50	10
G1/4A-H4-02	G1/4	1~2.3	13.15	8.5	19/19	50
G3/8A-H4-03	G3/8	1.5~3	16.66	15	22/22	50
G1/2A-H4-03	G1/2	1~2.5	20.95	10	27/27	50
G1/2A-H4-04	G1/2	1.5~3.5	20.95	10	27/27	50
G1/2A-H4-05	G1/2	2~4.5	20.95	10	27/27	50
G1/2A-H4-06	G1/2	3~6	20.95	10	27/33	50
G1/2A-H4-07	G1/2	4~7	20.95	10	27/33	50
G1/2A-H4-08	G1/2	5~8	20.95	10	27/33	50
G1/2A-H4-09	G1/2	6~9	20.95	10	27/33	50
G3/4A-H4-05	G3/4	2~5	26.66	15	33/33	50
G3/4A-H4-06	G3/4	3~6	26.66	15	33/33	50
G3/4A-H4-07	G3/4	4~7	26.66	15	33/33	50
G3/4A-H4-08	G3/4	5~8	26.66	15	33/33	50
G3/4A-H4-09	G3/4	6~9	26.66	15	33/33	50
G1A-H4-07	G1	4~7	33.2	15	42/41	20
G1A-H4-09	G1	6~9	33.2	15	42/41	20
G1-1/4A-H4-11	G1-1/4	8~11	41.9	16	51/50	10
G1-1/4A-H4-12	G1-1/4	9~12	41.9	16	51/50	10

五孔分体尼龙电缆防水接头

Five holes Nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)


Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

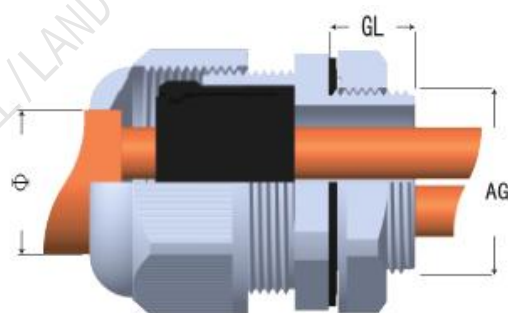

·产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG20A-H5-03	M20×1.5	1.5~3	20	15	27/27	50
MG20A-H5-04	M20×1.5	2~4	20	15	27/27	50
MG22A-H5-03	M22×1.5	1.5~3	22	10	29/27	50
MG22A-H5-04	M22×1.5	2~4	22	10	29/27	50
MG25A-H5-05	M25×1.5	3~5	25	15	33/33	50
MG25A-H5-06	M25×1.5	4~6	25	15	33/33	50
MG32A-H5-08	M32×1.5	5~8	32	15	41/41	20
MG40A-H5-08	M40×1.5	5~8	40	20	50/50	10
PG16A-H5-03	PG16	1.5~3	22.5	11	30/27	50
PG16A-H5-04	PG16	2~4	22.5	11	30/27	50
PG21A-H5-05	PG21	3~5	28.3	12	36/33	50
PG21A-H5-06	PG21	4~6	28.3	12	36/33	50
PG29A-H5-08	PG29	5~8	37	12	46/41	20
PG36A-H5-08	PG36	5~8	47	15	57/50	10
G1/2AL-H5-03	G1/2	2~4	20.95	15	27/27	50
G1/2AL-H5-06	G1/2	4~6	20.95	15	27/33	50
G3/4A-H5-06	G3/4	4~6	26.66	15	33/33	50
G1A-H5-08	G1	5~8	33.2	15	42/41	20
G1-1/4A-H5-08	G1-1/4	5~8	41.9	16	51/50	10

六孔分体尼龙电缆防水接头

Six holes Nylon cable waterproof gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68, UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

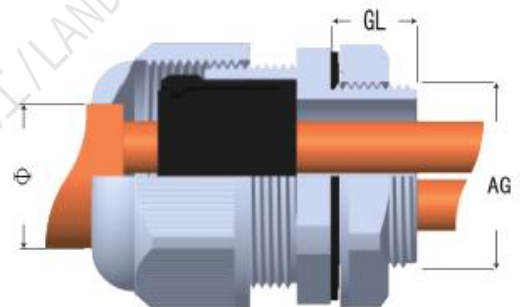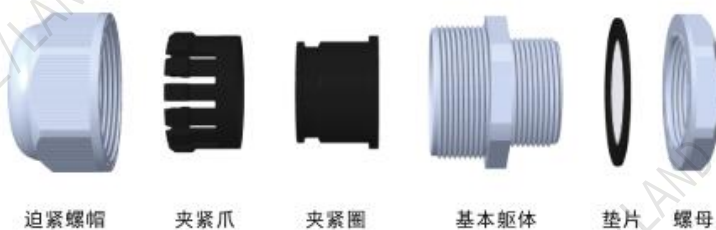

·产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG16A-H6-02	M16×1.5	1~2.1	16	15	22/22	50
MG20A-H6-03	M20×1.5	2~3.5	20	15	27/27	50
MG20A-H6-04	M20×1.5	2~4	20	15	27/27	50
MG22A-H6-03	M22×1.5	2~3.5	22	10	29/27	50
MG22A-H6-04	M22×1.5	2~4	22	10	29/27	50
MG25AS-H6-03	M25×1.5	2~3.5	25	15	33/27	50
MG25AS-H6-04	M25×1.5	2~4	25	15	33/27	50
MG25A-H6-05	M25×1.5	3~5	25	15	33/33	50
MG32A-H6-05	M32×1.5	3~5	32	15	41/41	20
MG32A-H6-07	M32×1.5	4~7	32	15	41/41	20
MG40A-H6-08	M40×1.5	5~8	40	20	50/50	10
MG63A-H6-12	M63×1.5	8~12	63	25	75/78	10
PG11A-H6-02	PG11	1~2.1	18.6	10	22/22	50
PG16A-H6-03	PG16	1.5~3	22.5	11	30/27	50
PG16A-H6-04	PG16	2~4	22.5	11	30/27	50
PG21A-H6-05	PG21	3~5	28.3	12	36/33	50
PG29A-H6-05	PG29	3~5	37	12	46/41	20
PG29A-H6-07	PG29	4~7	37	12	46/41	20
PG36A-H6-08	PG36	5~8	47	15	57/50	10
PG48A-H6-12	PG48	8~12	59.3	16	75/78	10
G3/8A-H6-02	G3/8	1~2.1	16.66	15	22/22	50
G1/2A-H6-03	G1/2	1.5~3	20.4	15	27/27	50
G1/2A-H6-04	G1/2	2~4	20.4	15	27/27	50
G1/2A-H6-05	G1/2	2~4	20.4	15	27/33	50
G3/4A-H6-05	G3/4	3~5	26.66	15	33/33	50
G1A-H6-05	G1	3~5	33.2	15	42/41	20
G1A-H6-07	G1	4~7	33.2	15	42/41	20
G1-1/4A-H6-08	G1-1/4	5~8	41.9	16	51/50	10
G2A-H6-12	G2	14~17	59.6	25	75/75	10

七孔分体尼龙电缆防水接头

Seven holes Nylon cable waterproof gland

产品材料：尼龙PA6


螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

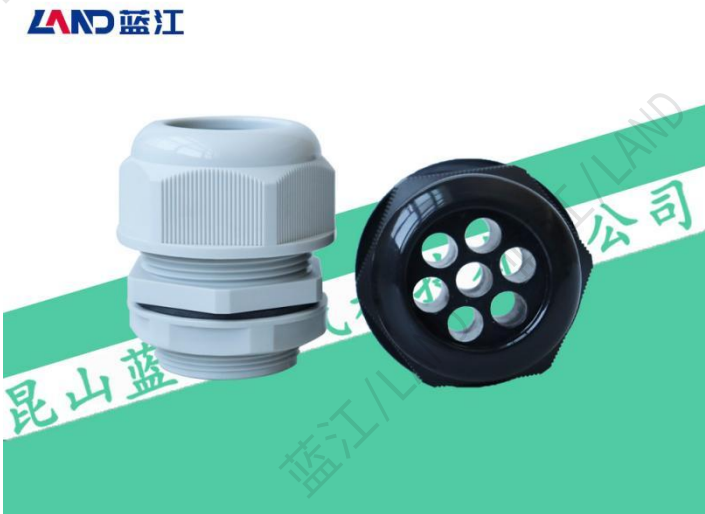

Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

七孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG25A-H7-04	M25×1.5	2～4	25	15	33/33	50
MG32A-H7-06	M32×1.5	4～6	32	15	41/41	20
MG40A-H7-08	M40×1.5	5～8	40	20	50/50	10
PG21A-H7-04	PG21	2～4	28.3	12	36/33	50
PG29A-H7-06	PG29	4～6	37	12	46/41	20
PG36A-H7-08	PG36	5～8	47	15	57/50	10
G1/2A-H7-04	G1/2	2～4	20.4	15	27/33	50
G3/4A-H7-04	G3/4	2～4.3	26.66	15	33/33	50
G1A-H7-06	G1	4～6	33.2	15	42/41	20
G1-1/4A-H7-08	G1-1/4	5～8	41.9	16	51/50	10

八孔分体尼龙电缆防水接头

Eight holes Nylon cable waterproof gland

- 产品材料: 尼龙PA6
- 螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)牙
- 产品特性: 符合CE, ROHS2.0, IP68、UL94V-2
- 温度测试: -40℃~105℃, 短时可达120℃
- 产品特性: 多孔密封圈设计, 可同时锁紧多根电缆密封



- Product Material: Nylon PA6
- Thread specification: metric M-thread, GB/T196-1981 standard
- Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2
- Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time
- Product features: Multi hole sealing ring, capable of simultaneously locking multiple cable seals

八孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	φ mm	AG φ mm	GL mm	nut/cap mm	PCS
MG16A-H8-02	M16×1.5	1~2.1	16	15	22/22	50
MG25A-H8-04	M25×1.5	2~4	25	15	33/33	50
MG32A-H8-05	M32×1.5	3~5	32	15	41/41	20
MG40A-H8-06	M40×1.5	4~6	40	20	50/50	10
PG11A-H8-02	PG11	1~2.1	18.6	10	22/22	50
PG21A-H8-04	PG21	2~4	28.3	12	36/33	50
PG29A-H8-05	PG29	3~5	37	12	46/41	20
PG36A-H8-06	PG36	4~6	47	15	57/50	10
G3/8A-H8-02	G3/8	1~2.1	16.66	15	22/22	50
G1/2A-H8-04	G1/2	2~4	20.4	15	27/33	50
G3/4A-H8-04	G3/4	2~4	26.66	15	33/33	50
G1A-H8-05	G1	3~5	33.2	15	42/41	20
G1-1/4A-H8-06	G1-1/4	4~6	41.9	16	51/50	10

九孔分体尼龙电缆防水接头

Nine holes Nylon cable waterproof gland

产品材料：尼龙PA6



螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread,PG thread, G thread

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

九孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG40A-H9-05	M40×1.5	3~5	40	20	50/50	10
PG36A-H9-05	PG36	3~5	47	15	57/50	10
G1-1/4A-H9-05	G1-1/4	3~5	41.9	16	51/50	10

十孔分体尼龙电缆防水接头

Ten holes Nylon cable waterproof gland

产品材料：尼龙PA6



螺纹规格：公制M牙，德制PG牙，英制G(PF)牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

十孔产品参数表M/PG/G(PF)

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG40A-H10-05	M40×1.5	3~5	40	20	50/50	10
PG36A-H10-05	PG36	3~5	47	15	57/50	10
G1-1/4A-H10-05	G1-1/4	3~5	41.9	16	51/50	10

连体多孔尼龙电缆防水接头

Integrated multi hole nylon cable gland

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：多孔密封圈设计，可同时锁紧多根电缆密封

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: M, PG, G(PF), NPT

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Multi hole sealing ring, locking multiple cable seals

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



产品参数表M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG11B-H2-04	PG11	1.5-4	18.6	10	24/22	50
PG11BL-H2-04	PG11	1.5-4	18.6	15	24/22	50
PG13.5B-H2-5.3	PG13.5	2-5.3	20.4	10	27/24	50
PG13.5BL-H2-5.3	PG13.5	2-5.3	20.4	15	27/24	50
PG16B-H2-06	PG16	3-6	22.5	10.8	30/27	50
PG16B-H3-06	PG16	3-6	22.5	10.8	30/27	50
PG16B-H4-05	PG16	2-5.5	22.5	10.8	30/27	50
PG16BL-H2-06	PG16	3-6	22.5	15	30/27	50
PG16BL-H3-06	PG16	3-6	22.5	15	30/27	50
PG16BL-H4-05	PG16	2-5.5	22.5	15	30/27	50
PG21B-H2-06	PG21	3-6	28.3	12	36/33	50
PG21BL-H2-06	PG21	3-6	28.3	15	36/33	50
PG36B-H5-08	PG36	4-8	47	15	57/52	10
PG36B-H6-08	PG36	4-8	47	15	57/52	10
MG16B-H2-04	M16×1.5	1.5-4	16	10	22/22	50
MG16BL-H2-04	M16×1.5	1.5-4	16	15	22/22	50
MG18B-H2-04	M18×1.5	1.5-4	18	10	24/22	50
MG18BL-H2-04	M18×1.5	1.5-4	18	15	24/22	50
MG20SB-H2-5.3	M20×1.5	2-5.3	20	10	27/24	50
MG20SBL-H2-5.3	M20×1.5	2-5.3	20	15	27/24	50
MG20B-H2-06	M20×1.5	3-6	20	10	27/27	50
MG20B-H3-06	M20×1.5	3-6	20	10	27/27	50
MG20B-H4-05	M20×1.5	2-5.5	20	10	27/27	50
MG20BL-H2-06	M20×1.5	3-6	20	15	27/27	50
MG20BL-H3-06	M20×1.5	3-6	20	15	27/27	50
MG20BL-H4-05	M20×1.5	2-5.5	20	15	27/27	50
MG22B-H2-06	M22×1.5	3-6	22	10	30/27	50
MG22B-H3-06	M22×1.5	3-6	22	10	30/27	50
MG22B-H4-05	M22×1.5	2-5.5	22	10	30/27	50
MG25SB-H2-06	M25×1.5	3-6	25	10	33/27	50
MG25SB-H3-06	M25×1.5	3-6	22	10	33/27	50
MG25SB-H4-05	M25×1.5	2-5.5	25	10	33/27	50
MG25B-H2-06	M25×1.5	3-6	25	10	33/27	50
MG25B-H6-05	M25×1.5	3-5	25	10	33/27	50
MG25BL-H2-06	M25×1.5	3-6	25	15	33/33	50
MG40B-H5-08	M40×1.5	4-8	40	15	50/52	10
MG40B-H6-08	M40×1.5	4-8	40	15	50/52	10

B型-防折弯尼龙电缆接头

B-type Stress relief Nylon cable gland

产品材料：尼龙PA6

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品颜色：黑色（RAL9005），灰白色(RAL7035)

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：防折耐扭护线设计，可有效保护电缆折弯

应用场景：电气，船舶，电机，照明，机械，轨道交通

订购说明：默认配扁垫片与螺母，无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)



Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Stress relief wire protection design can effectively protect cable bends

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

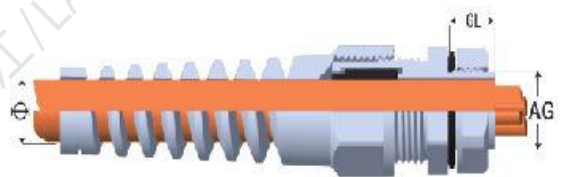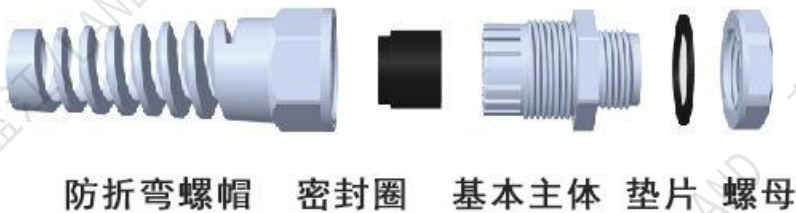

·产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
MG10B-P-06	M10×1.5	3~6	10	8	12/15	50
MG12B-P-08	M12×1.5	4~8	12	8.5	18/19	50
MG12B-P-05	M12×1.5	3~5	12	8.5	18/19	50
MG12BL-P-08	M12×1.5	4~8	12	15	18/19	50
MG12BL-P-05	M12×1.5	3~5	12	15	18/19	50
MG12BS-P-07	M12×1.5	3~6.5	12	8.5	18/15	50
MG12BSL-P-07	M12×1.5	3~6.5	12	15	18/15	50
MG14B-P-08	M14×1.5	4~8	12	8.5	18/19	50
MG16B-P-10	M16×1.5	6~10	16	10	22/22	50
MG16B-P-07	M16×1.5	4~7	16	10	22/22	50
MG16BL-P-10	M16×1.5	6~10	16	15	22/22	50
MG16BL-P-07	M16×1.5	4~7	16	15	22/22	50
MG16BS-P-08	M16×1.5	4~8	16	10	22/19	50
MG16BSL-P-08	M16×1.5	4~8	16	15	22/19	50
MG18B-P-10	M18×1.5	6~10	18	10	24/22	50
MG18BL-P-10	M18×1.5	6~10	18	15	24/22	50
MG20B-P-14	M20×1.5	8~14	20	10	27/27	50
MG20BL-P-14	M20×1.5	8~14	20	15	27/27	50
MG20BS-P-12	M20×1.5	6~12	20	10	27/24	50
MG20BS-P-09	M20×1.5	5~9	20	10	27/24	50
MG20BSL-P-12	M20×1.5	6~12	20	15	27/24	50
MG20BSL-P-09	M20×1.5	5~9	20	15	27/24	50
MG20BM-P-10	M20×1.5	6~10	20	10	27/22	50
MG20BM-P-07	M20×1.5	4~7	20	10	27/22	50
MG22B-P-14	M22×1.5	8~14	22	10	29/27	50
MG24B-P-14	M24×1.5	8~14	24	10	29/27	50
MG25B-P-18	M25×1.5	13~18	25	12	33/33	20
MG25BL-P-18	M25×1.5	13~18	25	15	33/33	20
MG25BS-P-14	M25×1.5	8~14	25	12	33/27	20
MG27B-P-18	M27×1.5	13~18	27	15	34/33	20
MG32B-P-25	M32×1.5	18~25	32	15	41/41	20
MG32B-P-22	M32×1.5	16~22	32	15	41/41	20
MG32B-P-18	M32×1.5	13~18	32	15	41/41	20
MG32B-P-12	M32×1.5	6~12	32	15	41/41	20
MG32BS-P-18	M32×1.5	13~18	32	15	41/33	20
MG36B-P-25	M36×1.5	18~25	36	12	45/41	10
MG40BS-P-25	M40×1.5	18~25	40	20	50/41	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
PG7B-P-08	PG7	4~8	12.5	8.5	17/19	50
PG7B-P-05	PG7	3~5	12.5	8.5	17/19	50
PG7BL-P-08	PG7	4~8	12.5	15	17/19	50
PG7BL-P-05	PG7	3~5	12.5	15	17/19	50
PG7BS-P-07	PG7	3~6.5	12.5	8.5	17/15	50
PG7BSL-P-07	PG7	3~6.5	12.5	15	17/15	50
PG9B-P-08	PG9	4~8	15.2	8.5	22/19	50
PG9B-P-05	PG9	3~5	15.2	8.5	22/19	50
PG9BL-P-08	PG9	4~8	15.2	15	22/19	50
PG9BL-P-05	PG9	3~5	15.2	15	22/19	50
PG11B-P-10	PG11	6~10	18.6	10	22/22	50
PG11B-P-07	PG11	4~7	18.6	10	22/22	50
PG11BL-P-10	PG11	6~10	18.6	15	22/22	50
PG11BL-P-07	PG11	4~7	18.6	15	22/22	50
PG13.5B-P-12	PG13.5	6~12	20.4	10	27/24	50
PG13.5B-P-09	PG13.5	5~9	20.4	10	27/24	50
PG13.5BL-P-12	PG13.5	6~12	20.4	15	27/24	50
PG13.5BL-P-09	PG13.5	5~9	20.4	15	27/24	50
PG16B-P-14	PG16	8~14	22.5	11	30/27	50
PG16B-P-12	PG16	6~12	22.5	11	30/27	50
PG16BL-P-14	PG16	8~14	22.4	15	30/27	50
PG16BL-P-12	PG16	6~12	22.4	15	30/27	50
PG19B-P-14	PG19	8~14	23.8	11	30/27	50
PG21B-P-18	PG21	13~18	28.3	12	36/33	20
PG21BL-P-18	PG21	13~18	28.3	15	36/33	20
PG29B-P-25	PG29	18~25	37	12	46/41	20
PG29BL-P-25	PG29	18~25	37	15	46/41	20
G1/4B-P-08	G1/4	4~8	13.15	8.5	19/19	50
G3/8B-P-10	G3/8	6~10	16.66	10	22/22	50
G1/2B-P-12	G1/2	6~12	20.95	10	27/24	50
G3/4B-P-18	G3/4	13~18	26.44	12	33/33	20
G1B-P-25	G1	18~25	33.2	13.5	42/41	20
NPT1/4B-P-08	NPT1/4	4~8	13.15	8.5	19/19	50
NPT3/8B-P-10	NPT3/8	6~10	16.66	10	22	50
NPT1/2B-P-12	NPT1/2	6~12	20.95	10	27	50
NPT3/4B-P-18	NPT3/4	13~18	26.44	15	33	20
NPT1B-P-25	NPT1	18~25	33.5	17	41	20

A型-防折弯尼龙电缆接头

B-type Stress relief Nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF)牙

产品颜色: 黑色 (RAL9005) , 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40℃~105℃, 短时可达120℃

产品特性: 防折耐扭护线设计, 可有效保护电缆折弯

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明



Product Material: Nylon PA6

Thread specification: metric M-thread, GB/T196-1981 standard

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Stress relief wire protection design can effectively protect cable bends

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-P-08	M12×1.5	12	4~8	8.5	18/19	50
MG12A-P-08	M12×1.5	12	3~5	8.5	18/19	50
MG16A-P-10	M16×1.5	16	6~10	15	22/22	50
MG16A-P-07	M16×1.5	16	4~7	15	22/22	50
MG16AS-P-08	M16×1.5	16	4~8	15	22/19	50
MG20A-P-14	M20×1.5	20	8~14	15	27/27	50
MG20A-P-11	M20×1.5	20	6~11	15	27/27	50
MG20A-P-09	M20×1.5	20	5~9	15	27/27	50
MG20AS-P-12	M20×1.5	20	6~12	10	27/24	50
MG20AS-P-09	M20×1.5	20	5~9	10	27/24	50
MG22A-P-14	M22×1.5	22	8~14	10	29/27	50
MG25A-P-18	M25×1.5	25	13~18	15	33/33	20
MG25A-P-13	M25×1.5	25	8~13	15	33/33	20
MG25A-P-08	M25×1.5	25	4~8	15	33/33	20
MG25AS-P-14	M25×1.5	25	8~14	12	33/27	20
MG25AS-P-10	M25×1.5	25	6~10	12	33/27	20
MG32A-P-25	M32×1.5	32	18~25	15	41/41	20
MG32A-P-22	M32×1.5	32	16~22	15	41/41	20
PG7A-P-08	PG7	12.5	4~8	8.5	17/19	50
PG7A-P-05	PG7	12.5	3~5	8.5	17/19	50
PG9A-P-08	PG9	15.2	4~8	8.5	22/19	50
PG9A-P-05	PG9	15.2	3~5	8.5	22/19	50
PG11A-P-10	PG11	18.6	6~10	10	22/22	50
PG11A-P-07	PG11	18.6	4~7	10	22/22	50
PG13.5A-P-12	PG13.5	20.4	6~12	10	27/24	50
PG13.5A-P-09	PG13.5	20.4	5~9	10	27/24	50
PG16A-P-14	PG16	22.5	8~14	11	30/27	50
PG21A-P-18	PG21	28.3	13~18	12	36/33	20
PG29A-P-25	PG29	37	18~25	12	46/41	20
G1/4A-P-08	G1/4	13.15	4~8	8.5	19/19	50
G3/8A-P-10	G3/8	16.66	6~10	15	22/22	50
G1/2A-P-12	G1/2	20.95	6~12	10	27/24	50
G1/2AL-P-14	G1/2	20.95	8~14	15	30/27	50
G3/4A-P-18	G3/4	26.66	13~18	15	33/33	20
G1A-P-25	G1	33.2	18~25	13.5	42/41	20

90度弯角尼龙防水接头

90 degree angled nylon cable gland

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 德制PG牙, 英制G(PF)

产品颜色: 黑色 (RAL9005), 灰白色 (RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

产品特性: 90度弯角设计, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认配扁垫片与螺母, 无需请说明

LAND 蓝江



Product Material: Nylon PA6

Thread specification: M/PG/G(PF)

Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: CE, ROHS2.0, IP68、UL94V-2


Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in

a short period of time

Product features: 90 degree bend angle, waterproof IP68

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

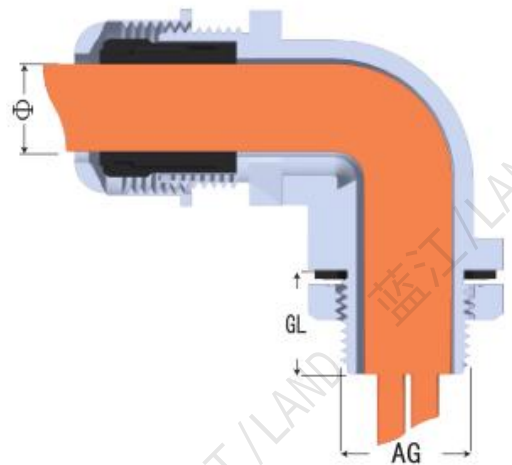

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-E-08	M12×1.5	12	4~8	8	17/16	50
MG12A-E-05	M12×1.5	12	3~5	8	17/16	50
MG12A-E-03	M12×1.5	12	1.5~3	8	17/16	50
MG16A-E-10	M16×1.5	16	6~10	10	22/22	50
MG16A-E-07	M16×1.5	16	4~7	10	22/22	50
MG16A-E-05	M16×1.5	16	3~5	10	22/22	50
MG16A-E-04	M16×1.5	16	2~4	10	22/22	50
MG20A-E-14	M20×1.5	20	8~14	15	27/27	50
MG20A-E-11	M20×1.5	20	6~11	15	27/27	50
MG20A-E-09	M20×1.5	20	5~9	15	27/27	50
MG25A-E-18	M25×1.5	25	13~18	15	33/33	20
MG25A-E-16	M25×1.5	25	10~16	15	33/33	20
MG25A-E-14	M25×1.5	25	8~14	15	33/33	20
MG25A-E-10	M25×1.5	25	6~10	15	33/33	20
MG32A-E-25	M32×1.5	32	18~25	15	41/41	20
MG32A-E-22	M32×1.5	32	16~22	15	41/41	20
MG40A-E-31	M40×1.5	40	24~31	20	50/55	10
MG40A-E-25	M40×1.5	40	18~25	20	55/55	10
PG7B-E-06	PG7	12.5	3~6	8	19/16	50
PG9B-E-08	PG9	15.2	4~8	8	22/19	50
PG11B-E-10	PG11	18.6	6~10	9	24/22	50
PG13.5B-E-12	PG13.5	20.4	6~12	9	27/24	50
PG16B-E-14	PG16	22.5	8~14	10	30/27	50
PG21B-E-18	PG21	28.3	13~18	12	33/33	20
PG29B-E-25	PG29	37	18~25	12	41/41	20
G1/2A-E-11	G1/2	20.95	6~11	15	27/27	50
G1/2A-E-14	G1/2	20.95	8~14	15	27/27	50

弧角90度弯角尼龙防水接头

90 degree curved nylon waterproof cable gland

产品材料：尼龙PA6

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

产品特性：90度弧度弯角设计，穿线更便捷

订购说明：默认配扁垫片与螺母，无需请说明

Product Material: Nylon PA6

Thread specification: metric M-thread

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree curved angle design, making threading more convenient

Ordering instructions: Default flat washer and nut, no need to specify



产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-HE-08	M12×1.5	4~8	12	10	22/22	50
MG12A-HE-05	M12×1.5	3~5	12	10	22/22	50
MG12A-HE-03	M12×1.5	1.5~3	12	10	22/22	50
MG16A-HE-10	M16×1.5	6~10	16	10	22/22	50
MG16A-HE-07	M16×1.5	4~7	16	10	22/22	50
MG20A-HE-14	M20×1.5	8~14	20	15	27/27	50
MG20A-HE-11	M20×1.5	6~11	20	15	27/27	50
MG20A-HE-09	M20×1.5	5~9	20	15	27/27	50
MG20A-HE-06	M20×1.5	3~6	20	15	27/27	50
MG25A-HE-18	M25×1.5	13~18	25	15	33/33	20
MG25A-HE-16	M25×1.5	10~16	25	15	33/33	20
MG25A-HE-14	M25×1.5	8~14	25	15	33/33	20
MG25A-HE-10	M25×1.5	6~10	25	15	33/33	20
MG32A-HE-25	M32×1.5	18~25	32	15	41/42	10
MG32A-HE-22	M32×1.5	16~22	32	15	41/42	10
MG40A-HE-32	M40×1.5	24~32	40	20	50/52	10
MG40A-HE-25	M40×1.5	18~25	40	20	50/52	10

90度-弯角防折弯尼龙防水接头

90 degree stress relief cable gland elbow

产品材料：尼龙PA6

产品特性：符合CE， ROHS2.0， IP68、 UL94V-2

温度测试：-40℃～105℃， 短时可达120℃

产品特性：90度弯角应力缓释设计， 可有效保护电缆

订购说明：默认配扁垫片与螺母， 无需请说明

Product Material: Nylon PA6

Product features: Compliant with CE, ROHS2.0, IP68、 UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree bending angle stress relief design can effectively protect cables

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify



产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	主体高度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Thread length	Body height	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	H mm	nut/cap mm	PCS
MG12A-E-P-08	M12×1.5	4～8	8	28	17/16	50
MG12A-E-P-05	M12×1.5	3～5	8	28	17/16	50
MG16A-E-P-10	M16×1.5	6～10	10	38	22/22	50
MG16A-E-P-07	M16×1.5	4～7	10	38	22/22	50
MG20A-E-P-14	M20×1.5	8～14	15	50	27/27	20
MG20A-E-P-11	M20×1.5	6～11	15	50	27/27	20
MG25A-E-P-18	M25×1.5	13～18	15	57	33/33	10
MG25A-E-P-16	M25×1.5	10～16	15	57	33/33	10
MG25A-E-P-14	M25×1.5	8～14	15	57	33/33	10
MG25A-E-P-10	M25×1.5	6～10	15	57	33/33	10
MG32A-E-P-25	M32×1.5	18～25	15	66	41/41	10
MG32A-E-P-22	M32×1.5	16～22	15	66	41/41	10

90度-弧度弯角防折弯尼龙防水接头

90 degree stress relief cable gland elbow



产品材料：尼龙PA6

产品特性：符合CE， ROHS2.0， IP68、 UL94V-2

温度测试：-40℃～105℃， 短时可达120℃

设计特点：90度弯角应力缓释设计， 可有效保护电缆

订购说明：默认配扁垫片与螺母， 无需请说明



Product Material: Nylon PA6

Product features: Compliant with CE, ROHS2.0, IP68、 UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: 90 degree bending angle stress relief design can effectively protect cables

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

Ordering instructions: Default flat washer and nut, no need to specify

·产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-HE-P-08	M12×1.5	4~8	12	10	22/22	50
MG12A-HE-P-05	M12×1.5	3~5	12	10	22/22	50
MG16A-HE-P-10	M16×1.5	6~10	16	10	22/22	50
MG16A-HE-P-07	M16×1.5	4~7	16	10	22/22	50
MG20A-HE-P-14	M20×1.5	8~14	20	15	27/27	20
MG20A-HE-P-11	M20×1.5	6~11	20	15	27/27	20
MG25A-HE-P-18	M25×1.5	13~18	25	15	33/33	10
MG25A-HE-P-16	M25×1.5	10~16	25	15	33/33	10
MG25A-HE-P-14	M25×1.5	8~14	25	15	33/33	10
MG25A-HE-P-10	M25×1.5	6~10	25	15	33/33	10
MG32A-HE-P-25	M32×1.5	18~25	32	15	41/42	10
MG32A-HE-P-22	M32×1.5	16~22	32	15	41/42	10

标准内螺纹电缆防水接头

Conventional internal thread cable galnd

产品材料: 尼龙PA6

螺纹规格: 公制M牙, 英制G(PF)牙

产品颜色: 黑色 (RAL9005), 灰白色(RAL7035)

产品特性: 符合CE, ROHS2.0, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 内螺纹设计, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

LAND 蓝江



Product Material: Nylon PA6

Thread specification: metric M-thread, PG-thread


Product color: Black (RAL9005), Light Grey (RAL7035)

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test: - 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Internal thread design, high protection level, strong tensile strength

Application scenarios: Electrical, Ship, Motor, Lighting, Machinery, Rail Transit

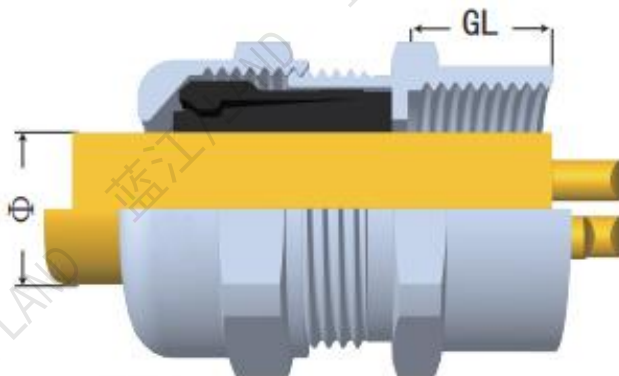

产品参数表

蓝江产品型号	螺纹规格	电缆范围	内螺纹深度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG16AF-08	M16×1.5	4~8	13	18/19	50
MG16AF-05	M16×1.5	3~5.5	13	18/19	50
MG16AF-03	M16×1.5	2~3	13	18/19	50
MG16AF-6.5	M16×1.5	3.5~6.5	13	18/19	50
MG16AF-6.7	M16×1.5	3.5~6.7	13	18/19	50
MG20AF-10	M20×1.5	6~10	14	22/22	50
MG20AF-07	M20×1.5	4~7	14	22/22	50
MG20AF-05	M20×1.5	3~5	14	22/22	50
MG20AF-04	M20×1.5	2~4	14	22/22	50
MG20AF-14	M20×1.5	8~14	14	27/27	50
MG20AF-12	M20×1.5	6~12	14	27/27	50
MG20AF-09	M20×1.5	5~9	14	27/27	50
MG20AF-06	M20×1.5	3~6	14	27/27	50
MG25AF-17	M25×1.5	13~17	15	33/33	50
MG25AF-16	M25×1.5	11~16	15	33/33	50
MG25AF-14	M25×1.5	8~14	14	33/33	50
MG25AF-10	M25×1.5	6~10	14	33/33	50
MG25AF-08	M25×1.5	4~8	14	33/33	50
MG25AF-06	M25×1.5	3~6	14	33/33	50
G1/2AF-14	G1/2	8~14	14	27/27	50
G1/2AF-11	G1/2	6~12	14	27/27	50
G1/2AF-09	G1/2	5~9	14	27/27	50
G1/2AF-06	G1/2	3~6	14	27/27	50
G3/4AF-17	G3/4	13~17	16	33/33	50
G3/4AF-16	G3/4	11~16	16	33/33	50
G3/4AF-14	G3/4	8~14	16	33/33	50
G3/4AF-10	G3/4	6~10	16	33/33	50
G3/4AF-08	G3/4	4~8	16	33/33	50
G3/4AF-06	G3/4	3~6	16	33/33	50

加长内螺纹尼龙防水接头

Extended internal thread nylon cable gland

产品材料：尼龙PA6



螺纹规格：公制M牙

产品特性：符合CE，ROHS2.0，IP68、UL94V-2

温度测试：-40℃～105℃，短时可达120℃

设计特点：加长内螺纹设计，防护等级高，抗拉力强



Product Material: Nylon PA6

Thread specification: M thread

Product features: Compliant with CE, ROHS2.0, IP68、UL94V-2

Temperature test:- 40 ° C to 105 ° C, up to 120 ° C in a short period of time

Product features: Extended internal thread design, high protection level, strong tensile strength

·产品参数表

蓝江产品型号	螺纹规格	电缆范围	内螺纹深度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG20LF-10	M20×1.5	6~10	17	22/22	50
MG20LF-07	M20×1.5	4~7	17	22/22	50
MG20LF-05	M20×1.5	3~5	17	22/22	50
MG20LF-04	M20×1.5	2~4	17	22/22	50
MG25LF-14	M25×1.5	8~14	17	27/27	50
MG25LF-12	M25×1.5	7~12	17	27/27	50
MG25LF-09	M25×1.5	5~9	17	27/27	50
MG25LF-06	M25×1.5	3~6	17	27/27	50

耐高温尼龙电缆防水接头

High temperature nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68

温度测试: -20°C~180°C, 短时可达220°C

设计特点: 本产品采用改性硅橡胶制成, 具有耐高温, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认配螺母与平垫, 如无需请另外说明

LAND 蓝江



Product materials: Nylon 6

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: This product is made of modified silicone rubber, which has the characteristics of high temperature resistance, high protection level, and strong tensile strength.

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Equipped with nuts and waterproof pads,

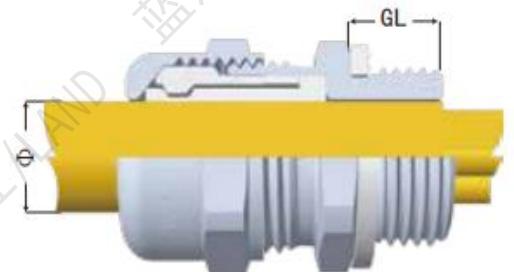

产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-HT	M12×1.5	4~8	12	8.5	18/19	50
MG16AS-08-HT	M16×1.5	4~8	16	10	22/19	50
MG16A-10-HT	M16×1.5	6~10	16	15	22/22	50
MG20A-14-HT	M20×1.5	8~14	20	15	27/27	50
MG20A-12-HT	M20×1.5	6~12	20	10	27/27	50
MG22A-14-HT	M22×1.5	8~14	22	10	29/27	50
MG25AS-14-HT	M25×1.5	8~14	25	10	33/27	50
MG25A-18-HT	M25×1.5	13~18	25	15	33/33	50
MG25A-16-HT	M25×1.5	10~16	25	15	33/33	50
MG32A-25-HT	M32×1.5	18~25	32	15	41/41	20
MG32A-22-HT	M32×1.5	16~22	32	15	41/41	20
MG40A-32-HT	M40×1.5	24~32	40	20	50/50	10
MG50A-41-HT	M50×1.5	31~41	50	22	62/62	10
MG63A-51-HT	M63×1.5	44~51	63	25	75/78	10
PG7A-08-HT	PG7	4~8	12.5	8.5	17/19	50
PG9A-08-HT	PG9	4~8	15.2	8.5	22/19	50
PG11A-10-HT	PG11	6~10	18.6	10	22/22	50
PG13.5A-12-HT	PG13.5	6~12	20.4	10	27/24	50
PG16A-14-HT	PG16	8~14	22.5	11	30/27	50
PG21A-18-HT	PG21	13~18	28.3	12	36/33	50
PG29A-25-HT	PG29	18~25	37	12	46/41	20
PG36A-31-HT	PG36	24~31	47	15	57/50	10
PG42A-41-HT	PG42	31~41	54	15.5	64/62	10
PG48A-51-HT	PG48	44~51	59.3	16	75/78	10
G1/4A-08-HT	G1/4	4~8	13.15	8.5	19/19	50
G3/8A-10-HT	G3/8	6~10	16.66	15	22/22	50
G1/2A-12-HT	G1/2	6~12	20.95	10	27/24	50
G1/2AL-14-HT	G1/2	8~14	20.95	15	30/27	50
G3/4A-18-HT	G3/4	13~18	26.44	15	33/33	50
G3/4A-16-HT	G3/4	10~16	26.44	15	33/33	50
G1A-25-HT	G1	18~25	33.2	15	42/41	20
G1-1/4A-31-HT	G1-1/4	24~31	41.9	16	51/50	10
G1-1/2A-41-HT	G1-1/2	31~41	47.8	22	62/62	10
G2A-51-HT	G2	44~51	59.6	25	75/75	10

阻燃尼龙电缆防水接头

Flame retardant nylon cable gland

产品材料: 尼龙PA6

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-0

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本产品采用改性阻燃橡胶制成, 具有防火阻燃, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认配螺母与平垫, 如无需请另外说明

LAND 蓝江



Product materials: PA6

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of modified flame-retardant rubber, which has the characteristics of fire resistance, high protection level, and strong tensile strength.

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Equipped with nuts and waterproof pads,



追紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

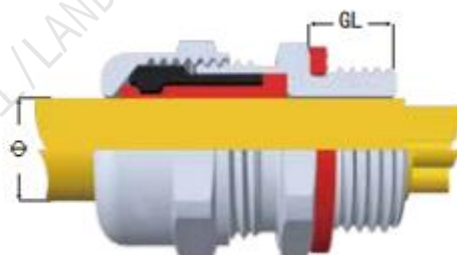

产品参数表

蓝江产品型号	螺纹规格	电缆范围	建议开孔	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Cable range	Hole size	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG mm	GL mm	nut/cap mm	PCS
MG12A-08-V0	M12×1.5	4~8	12	8.5	18/19	50
MG16AS-08-V0	M16×1.5	4~8	16	10	22/19	50
MG16A-10-V0	M16×1.5	6~10	16	15	22/22	50
MG20A-14-V0	M20×1.5	8~14	20	15	27/27	50
MG20A-12-V0	M20×1.5	6~12	20	10	27/24	50
MG22A-14-V0	M22×1.5	8~14	22	10	29/27	50
MG25AS-14-V0	M25×1.5	8~14	25	10	33/27	50
MG25A-18-V0	M25×1.5	13~18	25	15	33/33	50
MG25A-16-V0	M25×1.5	10~16	25	15	33/33	50
MG32A-25-V0	M32×1.5	18~25	32	15	41/41	20
MG32A-22-V0	M32×1.5	16~22	32	15	41/41	10
MG40A-31-V0	M40×1.5	24~31	40	20	50/50	10
MG50A-41-V0	M50×1.5	31~41	50	22	62/62	10
MG63A-51-V0	M63×1.5	44~51	63	25	75/78	10
PG7A-08-V0	PG7	4~8	12.5	8.5	17/19	50
PG9A-08-V0	PG9	4~8	15.2	8.5	22/19	50
PG11A-10-V0	PG11	6~10	18.6	10	22/22	50
PG13.5A-12-V0	PG13.5	6~12	20.4	10	27/24	50
PG16A-14-V0	PG16	8~14	22.5	11	30/27	50
PG21A-18-V0	PG21	13~18	28.3	12	36/33	50
PG21A-16-V0	PG21	10~16	28.3	12	36/33	50
PG29A-25-V0	PG29	18~25	37	12	46/41	20
PG36A-31-V0	PG36	24~32	47	15	57/50	10
PG42A-41-V0	PG42	31~41	54	15.5	64/62	10
PG48A-51-V0	PG48	44~51	59.3	16	75/78	10
G1/4A-08-V0	G1/4	4~8	13.15	8.5	19/19	50
G3/8A-10-V0	G3/8	6~10	16.66	15	22/22	50
G1/2A-12-V0	G1/2	6~12	20.95	10	27/24	50
G1/2AL-14-V0	G1/2	8~14	20.95	15	30/27	50
G3/4A-18-V0	G3/4	13~18	26.44	15	33/33	50
G3/4A-16-V0	G3/4	10~16	26.44	15	33/33	50
G1A-25-V0	G1	18~25	33.2	15	42/41	20
G1-1/4A-32-V0	G1-1/4	24~32	41.9	16	51/50	10
G1-1/2A-41-V0	G1-1/2	31~41	47.8	22	62/62	10
G2A-51-V0	G2	44~51	59.6	25	75/75	10

Ex系列-防爆不锈钢防水接头/M

Explosion proof stainless steel cable gland / M

产品材料: 默认304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

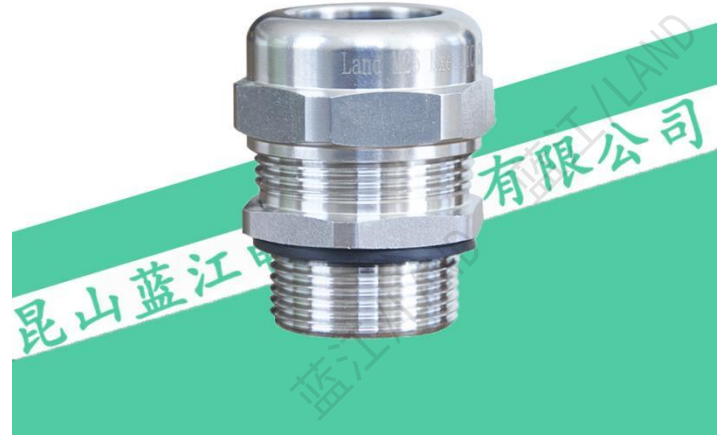

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

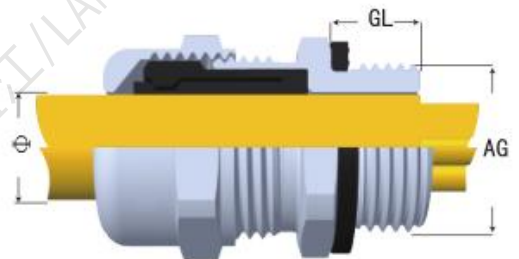

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG6-03-SS	M6×1	6	2~3	6	10/10	100
MG8-04-SS	M8×1	8	3~4	6	12/12	50
MG10-06-SS	M10×1.5(1)	10	3~6	7	14/14	100
MG12S-06-SS	M12×1.5(1)	12	3~6	7	15/14	50
MG12-08-SS	M12×1.5(1)	12	4~8	9	15/17	50
MG12-05-SS	M12×1.5(1)	12	3~5.5	9	15/17	50
MG12-03-SS	M12×1.5(1)	12	1.5~3	9	15/17	50
MG12-6.5-SS	M12×1.5(1)	12	3~6.5	9	15/17	50
MG12-6.7-SS	M12×1.5(1)	12	3~6.7	9	15/17	50
MG14-08-SS	M14×1.5	14	4~8	9	17/17	50
MG14-05-SS	M14×1.5	14	3~5.5	9	17/17	50
MG14-03-SS	M14×1.5	14	1.5~3	9	17/17	50
MG14-6.5-SS	M14×1.5	14	3~6.5	9	17/17	50
MG14-6.7-SS	M14×1.5	14	3~6.7	9	17/17	50
MG16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
MG16S-05-SS	M16×1.5	16	3~5.5	9.5	20/17	50
MG16S-03-SS	M16×1.5	16	1.5~3	9.5	20/17	50
MG16-10-SS	M16×1.5(1)	16	6~10	9.5	20/21	50
MG16-07-SS	M16×1.5(1)	16	4~7	9.5	20/21	50
MG16-05-SS	M16×1.5(1)	16	3~5	9.5	20/21	50
MG16-04-SS	M16×1.5(1)	16	2~4	9.5	20/21	50
MG18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
MG18-07-SS	M18×1.5	18	4~7	9.5	21/21	50
MG18-05-SS	M18×1.5	18	3~5	9.5	21/21	50
MG18-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20-16-SS	M20×1.5	20	11~16	12	24/27	50
MG20-14-SS	M20×1.5	20	8~14	12	24/26	50
MG20-11-SS	M20×1.5	20	7~11	12	24/26	50
MG20-09-SS	M20×1.5	20	5~9	12	24/26	50
MG20-06-SS	M20×1.5	20	3~6.5	12	24/26	50
MG20S-12-SS	M20×1.5	20	7~12	12	24/24	50
MG20S-11-SS	M20×1.5	20	6~11	12	24/24	50
MG20S-09-SS	M20×1.5	20	5~9	12	24/24	50
MG20X-08-SS	M20×1.5	20	4~8	12	24/18	50

MG20X-05-SS	M20×1.5	20	3~5.5	12	24/18	50
MG20X-03-SS	M20×1.5	20	2~3.2	12	24/18	50
MG22-14-SS	M22×1.5	22	8~14	12	26/26	50
MG22-11-SS	M22×1.5	22	7~11	12	26/26	50
MG22-09-SS	M22×1.5	22	5~9	12	26/26	50
MG22-06-SS	M22×1.5	22	3~6.5	12	26/26	50
MG24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
MG24-11-SS	M24×1.5	24	7~11	10.5	28/26	50
MG24-09-SS	M24×1.5	24	5~9	10.5	28/26	50
MG24-06-SS	M24×1.5	24	3~6.5	10.5	28/26	50
MG25-18-SS	M25×1.5	25	13~18	12	30/31	50
MG25-16-SS	M25×1.5	25	12~16	12	30/31	50
MG25-14-SS	M25×1.5	25	8~14	12	30/31	50
MG25-10-SS	M25×1.5	25	6~10	12	30/31	50
MG25-08-SS	M25×1.5	25	4~8	12	30/31	50
MG25-06-SS	M25×1.5	25	3~6	12	30/31	50
MG27-18-SS	M27×1.5(2)	27	13~18	12	30/31	50
MG27-16-SS	M27×1.5(2)	27	11~16	12	30/31	50
MG27-14-SS	M27×1.5(2)	27	8~14	12	30/31	50
MG27-10-SS	M27×1.5(2)	27	6~10	12	30/31	50
MG27-08-SS	M27×1.5(2)	27	4~8	12	30/31	50
MG27-06-SS	M27×1.5(2)	27	3~6	12	30/31	50
MG30-25-SS	M30×1.5(2)	30	18~25	12.5	34/40	50
MG30-22-SS	M30×1.5(2)	30	16~22	12.5	34/40	50
MG30-18-SS	M30×1.5(2)	30	13~18	12.5	34/31	50
MG30-16-SS	M30×1.5(2)	30	11~16	12.5	34/31	50
MG30-14-SS	M30×1.5(2)	30	8~14	12.5	34/31	50
MG30-10-SS	M30×1.5(2)	30	6~10	12.5	34/31	50
MG30-08-SS	M30×1.5(2)	30	4~8	12.5	34/31	50
MG30-06-SS	M30×1.5(2)	30	3~6	12.5	34/31	50
MG32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
MG32-22-SS	M32×1.5	32	16~22	12.5	38/40	20
MG32S-18-SS	M32×1.5	32	13~18	12	38/31	20
MG32S-16-SS	M32×1.5	32	11~16	12	38/31	20
MG32S-14-SS	M32×1.5	32	8~14	12	38/31	20
MG32S-10-SS	M32×1.5	32	6~10	12	38/31	20
MG32S-08-SS	M32×1.5	32	4~8	12	38/31	20
MG32S-06-SS	M32×1.5	32	3~6	12	38/31	20

MG33-25-SS	M33×2.0	33	18~25	14.5	38/40	20
MG33-22-SS	M33×2.0	33	16~22	14.5	38/40	20
MG36-25-SS	M36×1.5(2)	36	18~25	13	42/40	20
MG36-22-SS	M36×1.5(2)	36	16~22	13	42/40	20
MG40-31-SS	M40×1.5(2)	40	25~31	14	48/50	10
MG40-25-SS	M40×1.5(2)	40	18~25	14	48/50	10
MG40S-25-SS	M40×1.5	40	18~25	14	48/40	10
MG40S-22-SS	M40×1.5	40	16~22	14	48/40	10
MG42-31-SS	M42×2.0	42	25~31	15	48/50	10
MG42-25-SS	M42×2.0	42	18~25	15	48/50	10
MG48-31-SS	M48×2.0	48	25~31	15	58/50	10
MG48-25-SS	M48×2.0	48	18~25	15	58/50	10
MG50-41-SS	M50×1.5	50	33~41	15	58/60	10
MG50-33-SS	M50×1.5	50	25~33	15	58/60	10
MG50S-31-SS	M50×1.5	50	25~31	15	58/50	10
MG50S-25-SS	M50×1.5	50	18~25	15	58/50	10
MG60-54-SS	M60×2.0	60	46~54	15	71/76	10
MG60S-44-SS	M60×2.0	60	36~44	15	71/65	10
MG63-54-SS	M63×1.5	63	46~54	15	71/76	10
MG63-46-SS	M63×1.5	63	38~46	15	71/76	10
MG63-35-SS	M63×1.5	63	28~35	15	71/76	10
MG63S-44-SS	M63×1.5	63	36~44	15	71/65	10
MG64-54-SS	M64×2.0	64	46~54	15	71/76	10
MG64S-44-SS	M64×2.0	64	36~44	15	71/65	10
MG72-66-SS	M72×1.5(2)	72	60~66	15.5	80/85	2
MG72-62-SS	M72×1.5(2)	72	56~62	15.5	80/85	2
MG72-56-SS	M72×1.5(2)	72	50~56	15.5	80/85	2
MG72S-54-SS	M72×1.5(2)	72	46~54	15	80/75	2
MG75-66-SS	M75×1.5(2)	75	60~66	15.5	80/85	2
MG75-62-SS	M75×1.5(2)	75	56~62	15.5	80/85	2
MG75-56-SS	M75×1.5(2)	75	50~56	15.5	80/85	2
MG80-66-SS	M80×2.0	80	60~66	15.5	90/85	1
MG80-62-SS	M80×2.0	80	56~62	15.5	90/85	1
MG80-56-SS	M80×2.0	80	50~56	15.5	90/85	1
MG88-77-SS	M88×2.0	88	70~77	20	95/103	1
MG88-68-SS	M88×2.0	88	60~68	20	95/103	1
MG90-77-SS	M90×1.5(2)	90	70~77	20	95/103	1
MG90-68-SS	M90×1.5(2)	90	60~68	20	95/103	1

Ex系列-防爆不锈钢防水接头/PG

Explosion proof stainless steel cable gland/PG

产品材料: 默认304材质, 可选316和316L

螺纹规格: 德制PG牙, 符合DIN40430标准

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: PG thread, compliant with DIN40430 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

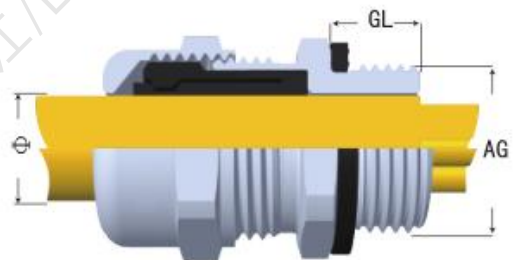

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG Φ mm	mm	mm	nut/cap mm	PCS
PG7S-06-SS	PG7	12.5	3~6	9	15/14	50
PG7-08-SS	PG7	12.5	4~8	9	15/17	50
PG7-05-SS	PG7	12.5	3~5.5	9	15/17	50
PG7-03-SS	PG7	12.5	2~3.2	9	15/17	50
PG9-08-SS	PG9	15.2	4~8	9	17/17	50
PG9-05-SS	PG9	15.2	3~5.5	9	17/17	50
PG9-03-SS	PG9	15.2	2~3.2	9	17/17	50
PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
PG11-07-SS	PG11	18.6	4~7	9.5	21/21	50
PG11-05-SS	PG11	18.6	3~5	9.5	21/21	50
PG11-04-SS	PG11	18.6	2~4	9.5	21/21	50
PG13.5-14-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-11-SS	PG13.5	20.4	6~11	10.5	24/24	50
PG13.5-09-SS	PG13.5	20.4	5~9	10.5	24/24	50
PG16-14-SS	PG16	22.5	8~14	12	26/26	50
PG16-11-SS	PG16	22.5	7~11	12	26/26	50
PG16-06-SS	PG16	22.5	3~6.5	12	26/26	50
PG19-14-SS	PG19	23.8	8~14	10.5	28/26	50
PG21-18-SS	PG21	28.3	13~18	12	32/31	50
PG21-16-SS	PG21	28.3	12~16	12	32/31	50
PG21-14-SS	PG21	28.3	8~14	12	32/31	50
PG21-10-SS	PG21	28.3	6~10	12	32/31	50
PG21-08-SS	PG21	28.3	4~8	12	32/31	50
PG21-06-SS	PG21	28.3	3~6	12	32/31	50
PG25-18-SS	PG25	29.8	13~18	12.5	34/31	50
PG29-25-SS	PG29	37	18~25	12.5	40/40	20
PG29-22-SS	PG29	37	17~22	12.5	40/40	20
PG36-31-SS	PG36	47	25~31	15	58/50	10
PG36-25-SS	PG36	47	18~25	15	58/50	10
PG42-41-SS	PG42	54	33~41	15	60/60	10
PG42-33-SS	PG42	54	25~33	15	60/60	10
PG48-44-SS	PG48	59.3	36~44	15	71/65	10
PG48-54-SS	PG48	59.3	44~54	15	71/76	10
PG63-54-SS	PG63	72	47~54	15	76/76	10

Ex系列-防爆不锈钢防水接头/G

Explosion proof stainless steel cable gland/G

产品材料: 304材质, 可选316和316L

螺纹规格: 英制G(PF)牙, 符合GB/T706.1-2000标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

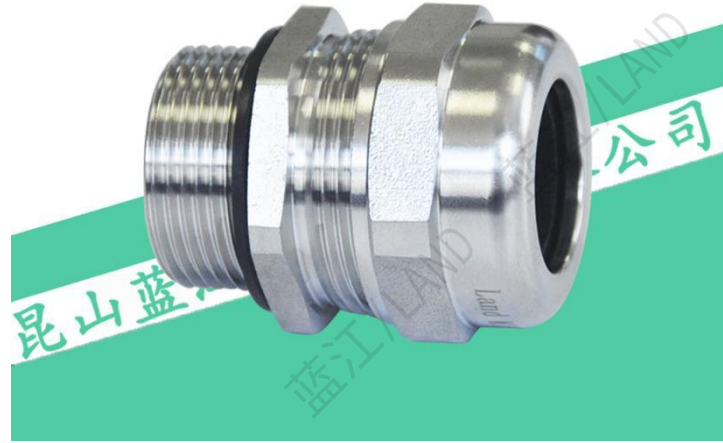

Product materials: SUS304, Optional 316 or 316L

Thread Standard: G (PF) thread, compliant with GB/T706.1-2000 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

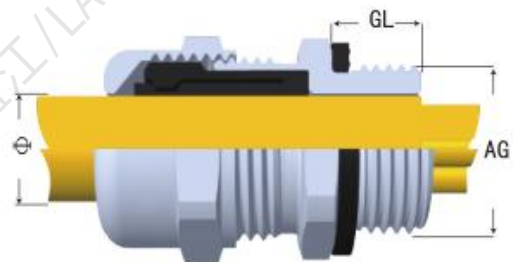

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G(PF)	AG Φ mm	mm	mm	nut/cap mm	PCS
G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
G1/4-05-SS	G1/4	13.15	3~5.5	9	17/17	50
G1/4-03-SS	G1/4	13.15	2~3.2	9	17/17	50
G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
G3/8-07-SS	G3/8	16.66	4~7	9.5	21/21	50
G3/8-05-SS	G3/8	16.66	3~5	9.5	21/21	50
G3/8-04-SS	G3/8	16.66	2~4.3	9.5	21/21	50
G1/2-16-SS	G1/2	20.99	11~16	12	24/27	50
G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
G1/2-12-SS	G1/2	20.99	7~12	12	24/24	50
G1/2-11-SS	G1/2	20.99	6~11	12	24/24	50
G1/2-09-SS	G1/2	20.99	5~9	12	24/24	50
G1/2X-08-SS	G1/2	20.99	4~8	12	24/17	50
G1/2X-05-SS	G1/2	20.99	3~5	12	24/17	50
G1/2X-03-SS	G1/2	20.99	2~3	12	24/17	50
G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
G3/4-14-SS	G3/4	26.44	8~14	12	30/31	50
G3/4-10-SS	G3/4	26.44	6~10	12	30/31	50
G3/4-08-SS	G3/4	26.44	4~8	12	30/31	50
G3/4-06-SS	G3/4	26.44	3~6	12	30/31	50
G1-25-SS	G1	33.25	18~25	15	38/40	20
G1-22-SS	G1	33.25	17~22	15	38/40	20
G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/4-25-SS	G1-1/4	41.91	18~25	15	48/50	10
G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-25-SS	G1-1/2	47.8	18~25	15	55/50	10
G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
G1-1/2-33-SS	G1-1/2	47.8	25~33	15	55/60	10
G2-44-SS	G2	59.61	36~44	15	71/65	1
G2-54-SS	G2	59.61	47~54	15	71/76	1
G2-46-SS	G2	59.61	40~46	15	71/76	1
G2-35-SS	G2	59.61	28~35	15	71/76	1
G2-1/2-66-SS	G2-1/2	75.18	60~66	15.5	80/85	1
G3-77-SS	G3	87.88	70~77	20	95/103	1

Ex系列-防爆不锈钢防水接头/NPT

Explosion proof stainless steel cable gland/NPT

产品材料: 304材质, 可选316和316L

螺纹规格: 美制NPT牙, 符合GB/T706.1-2000标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

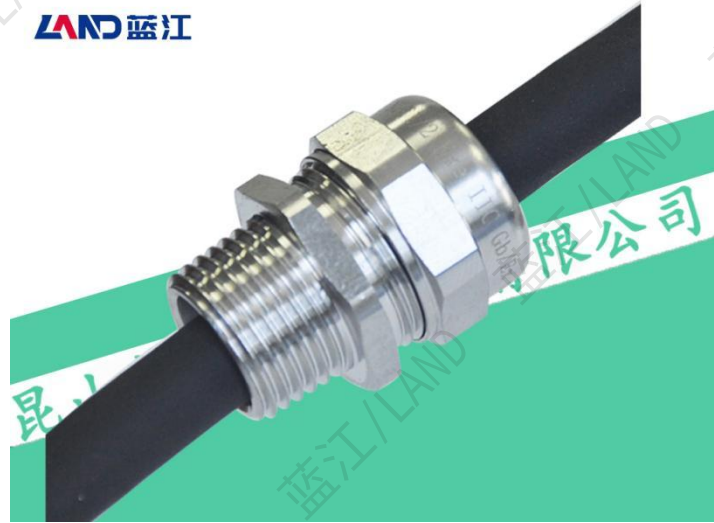

Product materials: SUS304, Optional 316 or 316L

Thread Standard: NPT thread, compliant with GB/T706.1-2000 standard


Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

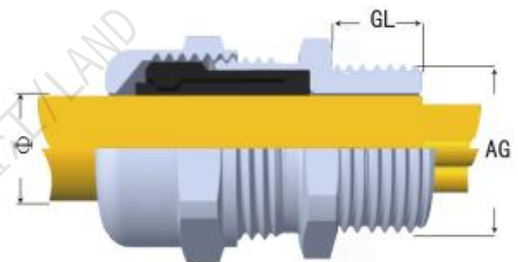

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	NPT	AG Φ mm	mm	mm	nut/cap mm	PCS
NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
NPT1/4-05-SS	NPT1/4	13.15	3~5.5	9	17	50
NPT1/4-03-SS	NPT1/4	13.15	2~3.2	9	17	50
NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
NPT3/8-07-SS	NPT3/8	17.05	4~7	10	21	50
NPT3/8-05-SS	NPT3/8	17.05	3~5	10	21	50
NPT3/8-04-SS	NPT3/8	17.05	2~4.3	10	21	50
NPT1/2-16-SS	NPT1/2	20.99	11~16	13	27	50
NPT1/2-14-SS	NPT1/2	20.99	8~14	13	26	50
NPT1/2-12-SS	NPT1/2	20.99	7~12	11	24	50
NPT1/2-11-SS	NPT1/2	20.99	6~11	11	24	50
NPT1/2-09-SS	NPT1/2	20.99	5~9	11	24	50
NPT1/2X-08-SS	NPT1/2	20.99	4~8	12	17	50
NPT1/2X-05-SS	NPT1/2	20.99	3~5	12	17	50
NPT1/2X-03-SS	NPT1/2	20.99	2~3	12	17	50
NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
NPT3/4-14-SS	NPT3/4	26.56	8~14	13	31	50
NPT3/4-10-SS	NPT3/4	26.56	6~10	13	31	50
NPT3/4-08-SS	NPT3/4	26.56	4~8	13	31	50
NPT3/4-06-SS	NPT3/4	26.56	3~6	13	31	50
NPT1-25-SS	NPT1	33.23	18~25	15	40	20
NPT1-22-SS	NPT1	33.23	17~22	15	40	20
NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/4-25-SS	NPT1-1/4	41.98	18~25	15	50	10
NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-25-SS	NPT1-1/2	48.05	18~25	15	50	10
NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
NPT1-1/2-33-SS	NPT1-1/2	48.05	25~33	15	60	10
NPT2-44-SS	NPT2	60.09	36~44	15	65	10
NPT2-54-SS	NPT2	60.09	44~54	15	76	10
NPT2-46-SS	NPT2	60.09	38~46	15	76	10
NPT2-35-SS	NPT2	60.09	28~35	15	76	10
NPT2-1/2-66-SS	NPT2-1/2	75.18	60~66	15.5	85	1
NPT3-77-SS	NPT3	87.88	70~77	20	103	1

长牙防爆不锈钢防水接头

Long thread Ex stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: $-40^{\circ}\text{C} \sim 105^{\circ}\text{C}$, 短时可达 120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 照明, 机械, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

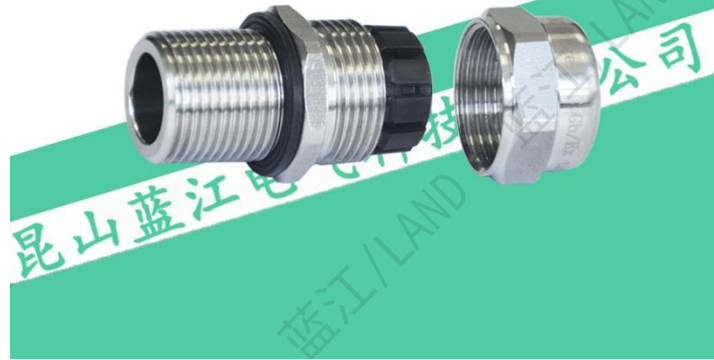

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40°C to 105°C , short-term 120°C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

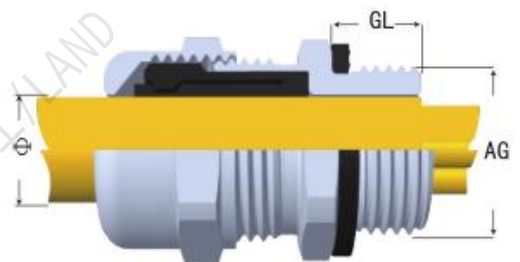

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG10-06-SS-L15	M10×1.5(1)	10	3~6	15	14/14	100
MG10-06-SS-L20	M10×1.5(1)	10	3~6	20	14/14	100
MG12-08-SS-L15	M12×1.5	12	4~8	15	15/17	50
MG12-08-SS-L20	M12×1.5	12	4~8	20	15/17	50
MG16-10-SS-L15	M16×1.5	16	6~10	15	20/21	50
MG16-10-SS-L20	M16×1.5	16	6~10	20	20/21	50
MG18-10-SS-L15	M18×1.5	18	6~10	15	21/21	50
MG18-10-SS-L20	M18×1.5	18	6~10	20	21/21	50
MG20-16-SS-L15	M20×1.5	20	11~16	15	24/27	50
MG20-16-SS-L20	M20×1.5	20	11~16	20	24/27	50
MG20-14-SS-L15	M20×1.5	20	8~14	15	24/26	50
MG20-14-SS-L20	M20×1.5	20	8~14	20	24/26	50
MG20S-12-SS-L15	M20×1.5	20	7~12	15	24/24	50
MG20S-12-SS-L20	M20×1.5	20	7~12	20	24/24	50
MG20S-09-SS-L15	M20×1.5	20	5~9	15	24/24	50
MG20S-09-SS-L20	M20×1.5	20	5~9	20	24/24	50
MG22-14-SS-L15	M22×1.5	22	8~14	15	26/26	50
MG22-14-SS-L20	M22×1.5	22	8~14	20	26/26	50
MG24-14-SS-L15	M24×1.5	24	8~14	15	28/26	50
MG24-14-SS-L20	M24×1.5	24	8~14	20	28/26	50
MG25-18-SS-L15	M25×1.5	25	13~18	15	30/31	50
MG25-18-SS-L20	M25×1.5	25	13~18	20	30/31	50
MG27-18-SS-L17	M27×1.5(2)	27	13~18	17	30/31	50
MG27-18-SS-L20	M27×1.5(2)	27	13~18	20	30/31	50
MG30-18-SS-L15	M30×1.5(2)	30	13~18	15	34/31	50
MG30-18-SS-L20	M30×1.5(2)	30	13~18	20	34/31	50
MG32-25-SS-L15	M32×1.5	32	18~25	15	38/40	20
MG32-25-SS-L20	M32×1.5	32	18~25	20	38/40	20
MG40-31-SS-L20	M40×1.5	40	25~31	20	48/50	10
MG42-31-SS-L20	M42×2.0	42	25~31	20	48/50	10
MG48-31-SS-L20	M48×2.0	48	25~31	20	58/50	10
MG50-41-SS-L20	M50×1.5	50	33~41	20	58/60	10
MG60-44-SS-L20	M60×2.0	60	36~44	20	71/65	10
MG63-44-SS-L20	M63×1.5	63	36~44	20	71/65	10
MG63-54-SS-L20	M63×1.5	63	46~54	20	71/76	10

NGW系列-大型不锈钢防水接头

NGW Series - Large Stainless Steel Cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 符合GB/T196-1981标准

产品特性: 符合CE, IP68、UL94V-2


温度测试: $-20^{\circ}\text{C} \sim 200^{\circ}\text{C}$, 短时可达 220°C

设计特点: 车铣一体成型, 产品密度高, 抗冲击力强

应用场景: 电气, 船舶, 电机, 大型机械设备, 交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

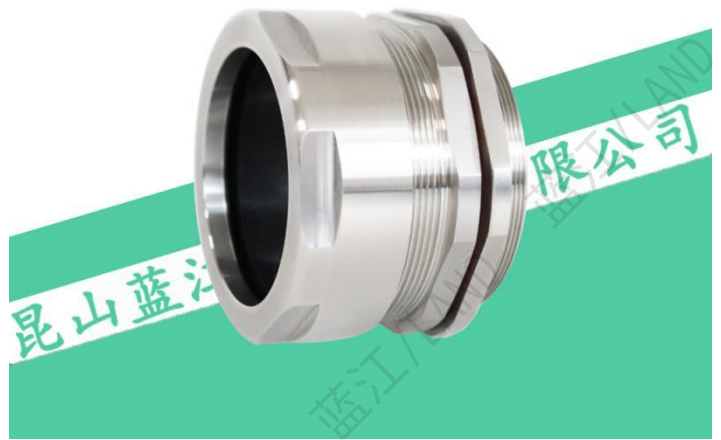

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric system, compliant with GB/T196-1981 standard

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -20°C to 200°C , short-term 220°C


Design Features: Milling integrated molding, high product density, strong impact resistance

Application: Electrical, marine, electric motors, large machinery, transportation, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

LAND 蓝江

LAND 蓝江

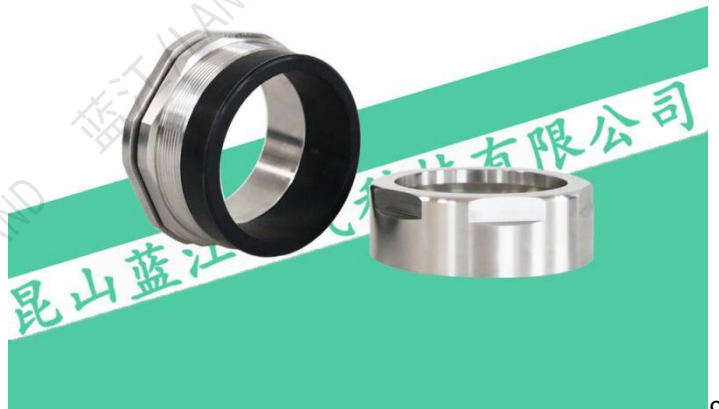

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装数量
Product model	Thread size	Hole size	Cable range	Thread length	quantity
PN.	M牙	AG φ mm	mm	mm	PCS
NGW-M50-43-SS	M50×1.5	50	35-43	15	1
NGW-M60-44-SS	M60×2.0	60	35-44	15	1
NGW-M63-44-SS	M63×1.5	63	35-44	15	1
NGW-M63-54-SS	M63×1.5	63	44-54	15	1
NGW-M64-44-SS	M64×2.0	64	35-44	15	1
NGW-M64-54-SS	M64×2.0	64	44-54	15	1
NGW-M72-54-SS	M72×1.5(2)	72	44-54	17	1
NGW-M72-60-SS	M72×1.5(2)	72	53-60	17	1
NGW-M75-54-SS	M75×1.5(2)	75	44-54	17	1
NGW-M75-60-SS	M75×1.5(2)	75	53-60	17	1
NGW-M75-68-SS	M75×1.5(2)	75	60-68	17	1
NGW-M80-60-SS	M80×2.0	80	53-60	18	1
NGW-M80-68-SS	M80×2.0	80	60-68	18	1
NGW-M88-61-SS	M88×2.0	88	52-61	18	1
NGW-M88-68-SS	M88×2.0	88	60-68	18	1
NGW-M88-77-SS	M88×2.0	88	68-77	18	1
NGW-M90-61-SS	M90×1.5(2)	90	52-61	18	1
NGW-M90-68-SS	M90×1.5(2)	90	60-68	18	1
NGW-M90-77-SS	M90×1.5(2)	90	68-77	18	1
NGW-M100-77-SS	M100×2.0	100	68-77	20	1
NGW-M100-90-SS	M100×2.0	100	80-90	20	1
NGW-M105-90-SS	M105×2.0	105	80-90	20	1
NGW-M110-90-SS	M110×2.0	110	80-90	20	1
NGW-M115-90-SS	M115×2.0	115	80-90	20	1
NGW-M115-104-SS	M120×2.0	115	95-104	20	1
NGW-M120-90-SS	M120×2.0	120	80-90	20	1
NGW-M120-104-SS	M120×2.0	120	95-104	20	1
NGW-M125-104-SS	M125×2.0	125	95-104	20	1
NGW-M130-104-SS	M130×2.0	130	95-104	20	1
NGW-M130-113-SS	M130×2.0	130	103-113	20	1
NGW-M140-113-SS	M140×2.0	140	103-113	20	1
NGW-M150-113-SS	M150×2.0	150	103-113	20	1

扁孔防爆不锈钢电缆防水接头

Explosion proof flat hole stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 扁形密封圈分体设计, 防护等级高, 抗拉

力强, 适用于各类扁电缆线及伴热带锁紧密封

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

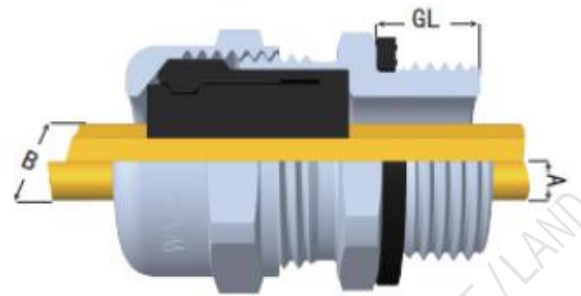

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Flat sealing ring split design, high protection level, strong tensile strength, suitable for locking and sealing of various flat cables and heat tracing belts

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG20S-0508-SS	M20×1.5	20	5*8	12	24/24	50
MG20S-0712-SS	M20×1.5	20	7*12	12	24/24	50
MG20-0410-SS	M20×1.5	20	4*10	12	24/26	50
MG20-0814-SS	M20×1.5	20	8*14	12	24/26	50
MG22-0410-SS	M22×1.5	22	4*10	12	26/26	50
MG22-0814-SS	M22×1.5	22	8*14	12	26/26	50
MG24-0410-SS	M24×1.5	24	4*10	10.5	28/26	50
MG24-0814-SS	M24×1.5	24	8*14	10.5	28/26	50
MG25-0614-SS	M25×1.5	25	7*14	12	30/31	50
MG27-0614-SS	M27×1.5(2)	27	7*14	12	30/31	50
MG30-0614-SS	M30×1.5(2)	30	7*14	12.5	34/31	50
MG30-0519-SS	M30×1.5(2)	30	5*19	12.5	34/41	50
MG32S-0714-SS	M32×1.5	32	7*14	12	38/31	50
MG32-0519-SS	M32×1.5	32	5*19	12.5	38/40	20
MG36-0519-SS	M36×1.5(2)	36	5*19	13	42/40	20
MG40S-0519-SS	M40×1.5	40	5*19	14	48/40	10
MG40-1230-SS	M40×1.5	40	12*30	14	48/50	10
MG42-1230-SS	M42×2.0	42	12*30	15	48/50	10
MG48-1230-SS	M48×2.0	48	12*30	15	58/50	10
MG50S-1230-SS	M50×1.5	50	12*30	15	58/50	10
MG50-1334-SS	M50×1.5	50	13*34	15	58/60	10
MG63S-1641-SS	M63×1.5	63	16*41	15	71/65	10
MG63S-2044-SS	M63×1.5	63	20*44	15	71/76	10
MG63-2055-SS	M63×1.5	63	20*55	15	71/76	10
MG72-2055-SS	M72×2.0	72	20*55	15	80/75	2

·产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG13.5-0508-SS	PG13.5	20.4	5*8	10	24/24	50
PG13.5-0712-SS	PG13.5	20.4	7*12	10	24/24	50
PG16-0410-SS	PG16	22.5	4*10	11	26/26	50
PG16-0814-SS	PG16	22.5	8*14	11	26/26	50
PG21-0614-SS	PG21	28.3	7*14	12	32/31	50
PG29-0519-SS	PG29	37	5*19	12	40/40	20
PG36-1230-SS	PG36	47	12*30	15	58/50	10
PG42-1334-SS	PG42	54	13*34	15.5	60/60	10
PG48-1641-SS	PG48	59.3	16*41	15	71/65	10
PG48-2044-SS	PG48	59.3	20*44	15	71/65	10
PG48-2055-SS	PG48	59.3	20*55	15	71/76	10
G1/2-0508-SS	G1/2	20.95	5*8	12	24/24	50
G1/2-0712-SS	G1/2	20.95	7*12	12	24/24	50
G1/2D-0410-SS	G1/2	20.95	4*10	12	24/26	50
G1/2D-0814-SS	G1/2	20.95	8*14	12	24/26	50
G3/4-0614-SS	G3/4	26.44	7*14	12	30/31	50
G1-0519-SS	G1	33.2	5*19	15	38/40	20
G1-1/4-1230-SS	G1-1/4	41.9	12*30	15	48/50	10
G1-1/2-1230-SS	G1-1/2	47.8	12*30	15	55/50	10
G1-1/2-1334-SS	G1-1/2	47.8	13*34	15	55/60	10
G2-1641-SS	G2	59.6	16*41	15	71/65	10
G2-2044-SS	G2	59.6	20*44	15	71/65	10
G2-2055-SS	G2	59.6	20*55	15	71/76	10
NPT1/2-0508-SS	NPT1/2	20.95	5*8	13	24	50
NPT1/2-0712-SS	NPT1/2	20.95	7*12	13	24	50
NPT1/2D-0410-SS	NPT1/2	20.95	4*10	13	26	50
NPT1/2D-0814-SS	NPT1/2	20.95	8*14	13	26	50
NPT3/4-0614-SS	NPT3/4	26.44	7*14	13	31	50
NPT1-0519-SS	NPT1	33.2	5*19	15	40	20
NPT1-1/4-1230-SS	NPT1-1/4	41.9	12*30	15	50	10
NPT1-1/2-1230-SS	NPT1-1/2	47.8	12*30	15	50	10
NPT1-1/2-1334-SS	NPT1-1/2	47.8	13*34	15	60	10
NPT2-1641-SS	NPT2	59.6	16*41	15	65	10
NPT2-2044-SS	NPT2	59.6	20*44	15	65	10
NPT2-2055-SS	NPT2	59.6	20*55	15	76	10

二孔防爆不锈钢电缆防水接头

Two holes stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

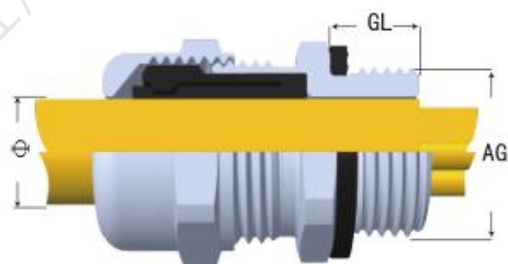

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-H2-03-SS	M12×1.5	12	1.5~3	9	15/17	50
MG14-H2-03-SS	M14×1.5	14	1.5~3	9	17/17	50
MG16S-H2-03-SS	M16×1.5	16	1.5~3	9.5	20/17	50
MG16-H2-02-SS	M16×1.5	16	1.5~2.6	9.5	20/21	50
MG16-H2-04-SS	M16×1.5	16	2~4	9.5	20/21	50
MG18-H2-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20S-H2-05-SS	M20×1.5	20	2~5	12	24/24	50
MG20-H2-03-SS	M20×1.5	20	1.5~3	12	24/26	50
MG20-H2-04-SS	M20×1.5	20	2~4	12	24/26	50
MG20-H2-05-SS	M20×1.5	20	2~5	12	24/26	50
MG20-H2-06-SS	M20×1.5	20	3~6	12	24/26	50
MG20-H2-07-SS	M20×1.5	20	4~7	12	24/26	50
MG22-H2-06-SS	M22×1.5	22	3~6	12	26/26	50
MG24-H2-06-SS	M24×1.5	24	3~6	10.5	28/26	50
MG25-H2-05-SS	M25×1.5	25	3~5	12	30/31	50
MG25-H2-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H2-08-SS	M25×1.5	25	5~8	12	30/31	50
MG25-H2-09-SS	M25×1.5	25	6~9	12	30/31	50
MG27-H2-08-SS	M27×1.5 (2)	27	5~8	12	30/31	50
MG30-H2-08-SS	M30×1.5 (2)	30	5~8	12.5	34/31	50
MG30-H2-10-SS	M30×1.5 (2)	30	6~10	12.5	34/41	20
MG30-H2-12-SS	M30×1.5 (2)	30	9~12	12.5	34/41	20
MG32S-H2-08-SS	M32×1.5	32	5~8	12	38/31	20
MG32-H2-10-SS	M32×1.5	32	6~10	12.5	38/40	20
MG32-H2-12-SS	M32×1.5	32	9~12	12.5	38/40	20
MG36-H2-10-SS	M36×1.5 (2)	36	6~10	13	42/40	20
MG40S-H2-10-SS	M40×1.5	40	6~10	14	48/40	10
MG40S-H2-12-SS	M40×1.5	40	9~12	14	48/40	10
MG40-H2-13-SS	M40×1.5	40	10~13	14	48/50	10
MG42-H2-13-SS	M42×2.0	42	10~13	15	48/50	10
MG48-H2-13-SS	M48×2.0	48	10~13	15	58/50	10
MG50S-H2-13-SS	M50×1.5	50	10~13	15	58/50	10
MG50-H2-15-SS	M50×1.5	50	11~15	15	58/60	10
MG63-H2-17-SS	M63×1.5	63	14~17	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG7-H2-03-SS	PG7	12.5	1.5~3	8.5	15/17	50
PG9-H2-03-SS	PG9	15.2	1.5~3	8.5	17/17	50
PG11-H2-02-SS	PG11	18.6	1.5~2.6	10	21/21	50
PG11-H2-04-SS	PG11	18.6	2~4	10	21/21	50
PG13.5-H2-05-SS	PG13.5	20.4	2~5	10	24/24	50
PG13.5-H2-03-SS	PG13.5	20.4	1.5~3	10	24/26	50
PG13.5-H2-04-SS	PG13.5	20.4	2~4	10	24/26	50
PG13.5-H2-05-SS	PG13.5	20.4	2~5	10	24/26	50
PG13.5-H2-06-SS	PG13.5	20.4	3~6	10	24/26	50
PG13.5-H2-07-SS	PG13.5	20.4	4~7	10	24/26	50
PG16-H2-03-SS	PG16	22.5	1.5~3	11	26/26	50
PG16-H2-04-SS	PG16	22.5	2~4	11	26/26	50
PG16-H2-05-SS	PG16	22.5	2~5	11	26/26	50
PG16-H2-06-SS	PG16	22.5	3~6	11	26/26	50
PG16-H2-07-SS	PG16	22.5	4~7	11	26/26	50
PG19-H2-03-SS	PG19	23.8	1.5~3	10.5	28/26	50
PG19-H2-04-SS	PG19	23.8	2~4	10.5	28/26	50
PG19-H2-05-SS	PG19	23.8	2~5	10.5	28/26	50
PG19-H2-06-SS	PG19	23.8	3~6	10.5	28/26	50
PG19-H2-07-SS	PG19	23.8	4~7	10.5	28/26	50
PG21-H2-05-SS	PG21	28.3	2~5	12	32/31	50
PG21-H2-06-SS	PG21	28.3	3~6	12	32/31	50
PG21-H2-08-SS	PG21	28.3	5~8	12	32/31	50
PG21-H2-09-SS	PG21	28.3	6~9	12	32/31	50
PG25-H2-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H2-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H2-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG25-H2-09-SS	PG25	29.8	6~9	12.5	34/31	50
PG29-H2-10-SS	PG29	37	6~10	12	40/40	20
PG29-H2-12-SS	PG29	37	9~12	12	40/40	20
PG36-H2-13-SS	PG36	47	9~13	15	58/50	10
PG42-H2-15-SS	PG42	54	11~15	15.5	60/60	10
PG48-H2-17-SS	PG48	59.3	14~17	16	71/65	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
G1/4-H2-03-SS	G1/4	13.15	1.5~3	9	17/17	50
G3/8-H2-02-SS	G3/8	16.66	1.5~2.6	9.5	21/21	50
G3/8-H2-04-SS	G3/8	16.66	2~4	9.5	21/21	50
G1/2-H2-05-SS	G1/2	20.95	2~5	12	24/24	50
G1/2D-H2-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2D-H2-04-SS	G1/2	20.95	2~4	12	24/26	50
G1/2D-H2-05-SS	G1/2	20.95	2~5	12	24/26	50
G1/2D-H2-06-SS	G1/2	20.95	3~6	12	24/26	50
G3/4-H2-05-SS	G3/4	26.44	3~5	12	30/31	50
G3/4-H2-06-SS	G3/4	26.44	3~6	12	30/31	50
G3/4-H2-08-SS	G3/4	26.44	5~8	12	30/31	50
G1-H2-10-SS	G1	33.2	6~10	15	38/40	20
G1-H2-12-SS	G1	33.2	8~12	15	38/40	20
G1-1/4-H2-13-SS	G1-1/4	41.9	9~13	15	48/50	10
G1-1/2-H2-13-SS	G1-1/2	47.8	9~13	15	55/50	10
G1-1/2-H2-15-SS	G1-1/2	47.8	11~15	15	55/60	10
G2-H2-17-SS	G2	59.6	14~17	15	71/76	10
NPT1/4-H2-03-SS	NPT1/4	13.15	1.5~3	9	17	50
NPT3/8-H2-02-SS	NPT3/8	16.66	1.5~2.6	10	21	50
NPT3/8-H2-04-SS	NPT3/8	16.66	2~4	10	21	50
NPT1/2-H2-05-SS	NPT1/2	20.95	2~5	13	24	50
NPT1/2D-H2-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2D-H2-04-SS	NPT1/2	20.95	2~4	13	26	50
NPT1/2D-H2-05-SS	NPT1/2	20.95	2~5	13	26	50
NPT1/2D-H2-06-SS	NPT1/2	20.95	3~6	13	26	50
NPT3/4-H2-05-SS	NPT3/4	26.44	3~5.5	13	31	50
NPT3/4-H2-06-SS	NPT3/4	26.44	3~6	13	31	50
NPT3/4-H2-08-SS	NPT3/4	26.44	5~8	13	31	50
NPT1-H2-10-SS	NPT1	33.2	6~10	15	40	20
NPT1-H2-12-SS	NPT1	33.2	8~12	15	40	20
NPT1-1/4-H2-13-SS	NPT1-1/4	41.9	9~13	15	50	10
NPT1-1/2-H2-13-SS	NPT1-1/2	47.8	9~13	15	50	10
NPT1-1/2-H2-15-SS	NPT1-1/2	47.8	11~15	15	60	10
NPT2-H2-17-SS	NPT2	59.6	14~17	15	76	10

三孔防爆不锈钢电缆防水接头

Three holes stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

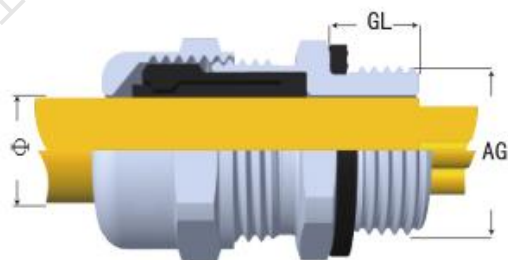

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG12-H3-02-SS	M12×1.5	12	1~2.6	9	15/17	50
MG14-H3-02-SS	M14×1.5	14	1~2.6	9	17/17	50
MG16S-H3-02-SS	M16×1.5	16	1~2.6	9.5	20/17	50
MG16-H3-03-SS	M16×1.5	16	1.5~3	9.5	20/21	50
MG16-H3-04-SS	M16×1.5	16	2~4	9.5	20/21	50
MG18-H3-04-SS	M18×1.5	18	2~4	9.5	21/21	50
MG20S-H3-05-SS	M20×1.5	20	2~5	12	24/24	50
MG20-H3-03-SS	M20×1.5	20	1.5~3	12	24/26	50
MG20-H3-05-SS	M20×1.5	20	2~5	12	24/26	50
MG20-H3-06-SS	M20×1.5	20	3~6	12	24/26	50
MG22-H3-05-SS	M22×1.5	22	2~5	12	26/26	50
MG22-H3-06-SS	M22×1.5	22	3~6	12	26/26	50
MG24-H3-05-SS	M24×1.5	24	2~5	10.5	28/26	50
MG24-H3-06-SS	M24×1.5	24	3~6	10.5	28/26	50
MG25-H3-05-SS	M25×1.5	25	2~5	12	30/31	50
MG25-H3-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H3-07-SS	M25×1.5	25	4~7	12	30/31	50
MG25-H3-08-SS	M25×1.5	25	5~8	12	30/31	50
MG27-H3-08-SS	M27×1.5(2)	27	5~8	12	30/31	50
MG30-H3-08-SS	M30×1.5(2)	30	5~8	12.5	34/31	50
MG30-H3-10-SS	M30×1.5(2)	30	6~10	12.5	34/40	50
MG32S-H3-08-SS	M32×1.5	32	5~8	12.5	38/31	20
MG32-H3-10-SS	M32×1.5	32	6~10	12.5	38/40	20
MG36-H3-10-SS	M36×1.5(2)	36	6~10	13	42/40	20
MG40S-H3-10-SS	M40×1.5	40	6~10	14	48/40	10
MG40-H3-11-SS	M40×1.5	40	8~11	14	48/50	10
MG40-H3-13-SS	M40×1.5	40	10~13	14	48/50	10
MG40-H3-14-SS	M40×1.5	40	11~14	14	48/50	10
MG42-H3-13-SS	M42×2.0	42	10~13	15	48/50	10
MG42-H3-14-SS	M42×2.0	42	11~14	15	48/50	10
MG48-H3-13-SS	M48×2.0	48	10~13	15	58/50	10
MG48-H3-14-SS	M48×2.0	48	11~14	15	58/50	10
MG50-H3-12-SS	M50×1.5	50	9~12	15	58/60	10
MG63-H3-13-SS	M63×1.5	63	9~13	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
PG7-H3-02-SS	PG7	12.5	1~2.6	9	15/17	50
PG9-H3-02-SS	PG9	15.2	1~2.6	9	17/17	50
PG11-H3-03-SS	PG11	18.6	1.5~3	9.5	21/21	50
PG11-H3-04-SS	PG11	18.6	2~4	9.5	21/21	50
PG13.5-H3-05-SS	PG13.5	20.4	2~5	10.5	24/24	50
PG13.5-H3-03-SS	PG13.5	20.4	1.5~3	10.5	24/26	50
PG13.5-H3-05-SS	PG13.5	20.4	2~5	10.5	24/26	50
PG13.5-H3-06-SS	PG13.5	20.4	3~6	10.5	24/26	50
PG16-H3-03-SS	PG16	28.3	1.5~3	12	26/26	50
PG16-H3-05-SS	PG16	22.5	2~5	12	26/26	50
PG16-H3-06-SS	PG16	22.5	3~6	12	26/26	50
PG19-H3-03-SS	PG19	23.8	1.5~3	10.5	28/26	50
PG19-H3-05-SS	PG19	23.8	2~5	10.5	28/26	50
PG19-H3-06-SS	PG19	23.8	3~6	10.5	28/26	50
PG21-H3-05-SS	PG21	28.3	2~5	12	32/31	50
PG21-H3-06-SS	PG21	28.3	3~6	12	32/31	50
PG21-H3-07-SS	PG21	28.3	4~7	12	32/31	50
PG21-H3-08-SS	PG21	28.3	5~8	12	32/31	50
PG25-H3-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H3-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H3-07-SS	PG25	29.8	4~7	12.5	34/31	50
PG25-H3-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG29-H3-10-SS	PG29	37	6~10	12.5	40/40	20
PG36-H3-11-SS	PG36	47	8~11	15	58/50	10
PG36-H3-13-SS	PG36	47	10~13	15	58/50	10
PG36-H3-14-SS	PG36	47	11~14	15	58/50	10
PG42-H3-12-SS	PG42	54	9~12	15	60/60	10
PG48-H3-13-SS	PG48	59.3	9~13	16	71/65	10

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
G1/4-H3-02-SS	G1/4	13.15	1~2.6	9	17/17	50
G3/8-H3-04-SS	G3/8	16.66	2~4	9.5	21/21	50
G1/2-H3-05-SS	G1/2	20.95	2~5	12	24/24	50
G1/2D-H3-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2D-H3-06-SS	G1/2	20.95	3~6	12	24/26	50
G3/4-H3-05-SS	G3/4	26.44	2~5	12	30/31	50
G3/4-H3-06-SS	G3/4	26.44	3~6	12	30/31	50
G3/4-H3-07-SS	G3/4	26.44	4~7	12	30/31	50
G3/4-H3-08-SS	G3/4	26.44	5~8	12	30/31	50
G1-H3-10-SS	G1	33.2	6~10	15	38/40	20
G1-1/4-H3-11-SS	G1-1/4	41.9	8~11	15	48/50	10
G1-1/4-H3-13-SS	G1-1/4	41.9	10~13	15	48/50	10
G1-1/4-H3-14-SS	G1-1/4	41.9	11~14	15	48/50	10
G1-1/2-H3-11-SS	G1-1/2	47.8	8~11	15	55/50	10
G1-1/2-H3-13-SS	G1-1/2	47.8	10~13	15	55/50	10
G1-1/2-H3-14-SS	G1-1/2	47.8	11~14	15	55/50	10
G2-H3-13	G2	59.6	9~13	15	71/76	10
NPT1/4-H3-02-SS	NPT1/4	13.15	1~2.6	9	17	50
NPT3/8-H3-04-SS	NPT3/8	16.66	2~4	10	21	50
NPT1/2-H3-05-SS	NPT1/2	20.95	2~5	11	24	50
NPT1/2D-H3-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2D-H3-06-SS	NPT1/2	20.95	3~6	13	26	50
NPT3/4-H3-05-SS	NPT3/4	26.44	2~5	13	31	50
NPT3/4-H3-06-SS	NPT3/4	26.44	3~6	13	31	50
NPT3/4-H3-07-SS	NPT3/4	26.44	4~7	13	31	50
NPT3/4-H3-08-SS	NPT3/4	26.44	5~8	13	31	50
NPT1-H3-10-SS	NPT1	33.2	6~10	15	40	20
NPT1-1/4-H3-11-SS	NPT1-1/4	41.9	8~11	15	50	10
NPT1-1/4-H3-13-SS	NPT1-1/4	41.9	10~13	15	50	10
NPT1-1/4-H3-14-SS	NPT1-1/4	41.9	11~14	15	50	10
NPT1-1/2-H3-11-SS	NPT1-1/2	47.8	8~11	15	50	10
NPT1-1/2-H3-13-SS	NPT1-1/2	47.8	10~13	15	50	10
NPT1-1/2-H3-14-SS	NPT1-1/2	47.8	11~14	15	50	10
NPT2-H3-13	NPT2	59.6	9~13	15	76	10

四孔防爆不锈钢电缆防水接头

Four hole stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可同时锁紧多根电缆线, 并保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

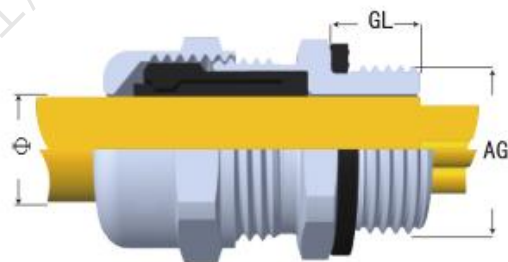

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-H4-02-SS	M12×1.5	12	1~2.3	9	15/17	50
MG14-H4-02-SS	M14×1.5	14	1~2.3	9	17/17	50
MG16S-H4-02-SS	M16×1.5	16	1~2.6	9.5	20/17	50
MG16-H4-03-SS	M16×1.5	16	1.5~3	9.5	20/21	50
MG20S-H4-04-SS	M20×1.5	20	2~4	12	24/24	50
MG20-H4-03-SS	M20×1.5	20	1~2.5	12	24/26	50
MG20-H4-04-SS	M20×1.5	20	1.5~3.5	12	24/26	50
MG20-H4-05-SS	M20×1.5	20	2~4.5	12	24/26	50
MG22-H4-03-SS	M22×1.5	22	1~2.5	12	26/26	50
MG22-H4-04-SS	M22×1.5	22	1.5~3.5	12	26/26	50
MG22-H4-05-SS	M22×1.5	22	2~4.5	12	26/26	50
MG24-H4-03-SS	M24×1.5	24	1~2.5	10.5	28/26	50
MG24-H4-04-SS	M24×1.5	24	1.5~3.5	10.5	28/26	50
MG24-H4-05-SS	M24×1.5	24	2~4.5	10.5	28/26	50
MG25-H4-05-SS	M25×1.5	25	2~5	12	30/31	50
MG25-H4-06-SS	M25×1.5	25	3~6	12	30/31	50
MG25-H4-07-SS	M25×1.5	25	4~7	12	30/31	50
MG25-H4-08-SS	M25×1.5	25	5~8	12	30/31	50
MG25-H4-09-SS	M25×1.5	25	6~9	12	30/31	50
MG27-H4-07-SS	M27×1.5(2)	27	4~7	12	30/31	50
MG27-H4-08-SS	M27×1.5(2)	27	5~8	12	30/31	50
MG30-H4-07-SS	M30×1.5(2)	30	4~7	12.5	34/31	50
MG30-H4-08-SS	M30×1.5(2)	30	5~8	12.5	34/31	50
MG30-H4-09-SS	M30×1.5(2)	30	6~9	12.5	34/31	50
MG32-H4-07-SS	M32×1.5	32	4~7	12.5	38/40	20
MG32-H4-09-SS	M32×1.5	32	6~9	12.5	38/40	20
MG36-H4-07-SS	M36×1.5(2)	36	4~7	13	42/40	20
MG36-H4-09-SS	M36×1.5(2)	36	6~9	13	42/40	20
MG40S-H4-09-SS	M40×1.5	40	6~9	14	48/40	20
MG40-H4-11-SS	M40×1.5	40	8~11	14	48/50	10
MG40-H4-12-SS	M40×1.5	40	9~12	14	48/50	10
MG42-H4-12-SS	M42×2.0	42	9~12	15	48/50	10
MG48-H4-12-SS	M48×2.0	48	9~12	15	58/50	10
MG50S-H4-12-SS	M50×1.5	50	9~12	15	58/50	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-H4-02	G1/4	13.15	1~2.3	9	17/17	50
G3/8-H4-03	G3/8	16.66	1.5~3	9.5	21/21	50
G1/2-H4-04	G1/2	20.95	1.5~3.5	12	24/24	50
G1/2D-H4-03	G1/2	20.95	1~2.5	12	24/26	50
G1/2D-H4-04	G1/2	20.95	1.5~3.5	12	24/26	50
G1/2D-H4-05	G1/2	20.95	2~4.5	12	24/26	50
G3/4-H4-05	G3/4	26.66	2~5	12	30/31	50
G3/4-H4-06	G3/4	26.66	3~6	12	30/31	50
G3/4-H4-07	G3/4	26.66	4~7	12	30/31	50
G3/4-H4-08	G3/4	26.66	5~8	12	30/31	50
G3/4-H4-09	G3/4	26.66	6~9	12	30/31	50
G1-H4-07	G1	33.2	4~7	15	38/40	20
G1-H4-09	G1	33.2	6~9	15	38/40	20
G1-1/4-H4-11	G1-1/4	41.9	8~11	15	48/50	10
G1-1/4-H4-12	G1-1/4	41.9	9~12	15	48/50	10
G1-1/2-H4-11	G1-1/2	47.8	8~11	15	55/50	10
G1-1/2-H4-12	G1-1/2	47.8	9~12	15	55/50	10
NPT1/4-H4-02	NPT1/4	13.15	1~2.3	9	17	50
NPT3/8-H4-03	NPT3/8	16.66	1.5~3	10	21	50
NPT1/2-H4-04	NPT1/2	20.95	1.5~3.5	11	24	50
NPT1/2D-H4-03	NPT1/2	20.95	1~2.5	13	26	50
NPT1/2D-H4-04	NPT1/2	20.95	1.5~3.5	13	26	50
NPT1/2D-H4-05	NPT1/2	20.95	2~4.5	13	26	50
NPT3/4-H4-05	NPT3/4	26.66	2~5	13	31	50
NPT3/4-H4-06	NPT3/4	26.66	3~6	13	31	50
NPT3/4-H4-07	NPT3/4	26.66	4~7	13	31	50
NPT3/4-H4-08	NPT3/4	26.66	5~8	13	31	50
NPT3/4-H4-09	NPT3/4	26.66	6~9	13	31	50
NPT1-H4-07	NPT1	33.2	4~7	15	40	20
NPT1-H4-09	NPT1	33.2	6~9	15	40	20
NPT1-1/4-H4-11	NPT1-1/4	41.9	8~11	15	50	10
NPT1-1/4-H4-12	NPT1-1/4	41.9	9~12	15	50	10
NPT1-1/2-H4-11	NPT1-1/2	47.8	8~11	15	50	10
NPT1-1/2-H4-12	NPT1-1/2	47.8	9~12	15	50	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG7-H4-02-SS	PG7	12.5	1~2.3	9	15/17	50
PG9-H4-02-SS	PG9	15.2	1~2.3	9	17/17	50
PG11-H4-03-SS	PG11	18.6	1.5~3	9.5	21/21	50
PG13.5-H4-04-SS	PG13.5	20.4	2~4	10.5	24/24	50
PG16-H4-03-SS	PG16	22.5	1~2.5	12	26/26	50
PG16-H4-04-SS	PG16	22.5	1.5~3.5	12	26/26	50
PG16-H4-05-SS	PG16	22.5	2~4.5	12	26/26	50
PG19-H4-03-SS	PG19	23.8	1~2.5	10.5	28/26	50
PG19-H4-04-SS	PG19	23.8	1.5~3.5	10.5	28/26	50
PG19-H4-05-SS	PG19	23.8	3~6	10.5	28/26	50
PG21-H4-05-SS	PG21	28.6	2~5	12	32/31	50
PG21-H4-06-SS	PG21	28.6	3~6	12	32/31	50
PG21-H4-07-SS	PG21	28.6	4~7	12	32/31	50
PG21-H4-08-SS	PG21	28.6	5~8	12	32/31	50
PG21-H4-09-SS	PG21	28.6	6~9	12	32/31	50
PG25-H4-05-SS	PG25	29.8	2~5	12.5	34/31	50
PG25-H4-06-SS	PG25	29.8	3~6	12.5	34/31	50
PG25-H4-07-SS	PG25	29.8	4~7	12.5	34/31	50
PG25-H4-08-SS	PG25	29.8	5~8	12.5	34/31	50
PG25-H4-08-SS	PG25	29.8	6~9	12.5	34/31	50
PG29-H4-07-SS	PG29	37	4~7	12.5	40/40	20
PG29-H4-09-SS	PG29	37	6~9	12.5	40/40	20
PG36-H4-11-SS	PG36	47	8~11	15	58/50	10
PG36-H4-12-SS	PG36	47	9~12	15	58/50	10

五孔防爆不锈钢电缆防水接头

Five hole stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

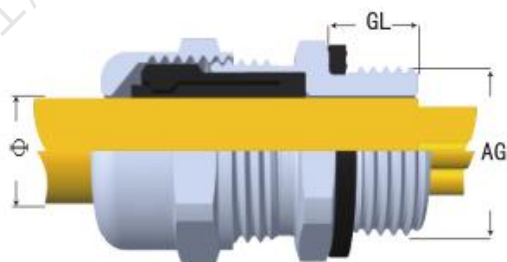

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG20-H5-03-SS	M20×1.5	20	1.5~3	12	26/26	50
MG20-H5-04-SS	M20×1.5	20	2~4	12	26/26	50
MG22-H5-03-SS	M22×1.5	22	1.5~3	12	26/26	50
MG22-H5-04-SS	M22×1.5	22	2~4	12	26/26	50
MG24-H5-03-SS	M24×1.5	24	1.5~3	10	29/27	50
MG24-H5-04-SS	M24×1.5	24	2~4	10	29/27	50
MG25-H5-05-SS	M25×1.5	25	3~5	12	30/31	50
MG25-H5-06-SS	M25×1.5	25	4~6	12	30/31	50
MG25-H5-07-SS	M25×1.5	25	5~7	12	30/31	50
MG27-H5-05-SS	M27×1.5(2)	27	3~5	12	30/31	50
MG27-H5-06-SS	M27×1.5(2)	27	4~6	12	30/31	50
MG27-H5-07-SS	M27×1.5(2)	27	5~7	12	30/31	50
MG30-H5-05-SS	M30×1.5(2)	30	3~5	12.5	34/31	50
MG30-H5-06-SS	M30×1.5(2)	30	4~6	12.5	34/31	50
MG30-H5-07-SS	M30×1.5(2)	30	5~7	12.5	34/31	50
MG32-H5-08-SS	M32×1.5	32	5~8	12.5	38/40	20
MG36-H5-08-SS	M36×1.5(2)	36	5~8	13	42/40	20
MG40-H5-08-SS	M40×1.5	40	5~8	14	48/50	10
MG40-H5-09-SS	M40×1.5	40	6~9	14	48/50	10
MG42-H5-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H5-08-SS	M48×2.0	48	5~8	15	48/50	10
MG50S-H5-08-SS	M50×1.5	50	5~8	15	58/50	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
PG13.5-H5-03-SS	PG13.5	20.4	1.5~3	10.5	24/26	50
PG13.5-H5-04-SS	PG13.5	20.4	2~4	10.5	24/26	50
PG16-H5-03-SS	PG16	22.5	1.5~3	12	26/26	50
PG16-H5-04-SS	PG16	22.5	2~4	12	26/26	50
PG19-H5-04-SS	PG19	23.8	2~4	10.5	28/26	50
PG21-H5-05-SS	PG21	28.3	3~5	12	32/31	50
PG21-H5-06-SS	PG21	28.3	4~6	12	32/31	50
PG21-H5-07-SS	PG21	28.3	5~7	12	32/31	50
PG25-H5-06-SS	PG25	29.8	4~6	12.5	34/31	50
PG29-H5-08-SS	PG29	37	5~8	12.5	40/40	20
PG36-H5-08-SS	PG36	47	5~8	15	58/50	10
PG36-H5-09-SS	PG36	47	6~9	15	58/50	10
G1/2-H5-03-SS	G1/2	20.95	1.5~3	12	24/26	50
G1/2-H5-04-SS	G1/2	20.95	2~4	12	24/26	50
G3/4-H5-05-SS	G3/4	26.66	3~5	12	30/31	50
G3/4-H5-06-SS	G3/4	26.66	4~6	12	30/31	50
G3/4-H5-07-SS	G3/4	26.66	5~7	12	30/31	50
G1-H5-08-SS	G1	33.2	5~8	15	38/40	20
G1-1/4-H5-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H5-08-SS	G1-1/2	47.8	5~8	15	55/50	10
NPT1/2-H5-03-SS	NPT1/2	20.95	1.5~3	13	26	50
NPT1/2-H5-04-SS	NPT1/2	20.95	2~4	13	26	50
NPT3/4-H5-05-SS	NPT3/4	26.66	3~5	13	31	50
NPT3/4-H5-06-SS	NPT3/4	26.66	4~6	13	31	50
NPT3/4-H5-07-SS	NPT3/4	26.66	5~7	13	31	50
NPT1-H5-08-SS	NPT1	33.2	5~8	15	40	20
NPT1-1/4-H5-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H5-08-SS	NPT1-1/2	47.8	5~8	15	50	10

六孔防爆不锈钢电缆防水接头

Six hole stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

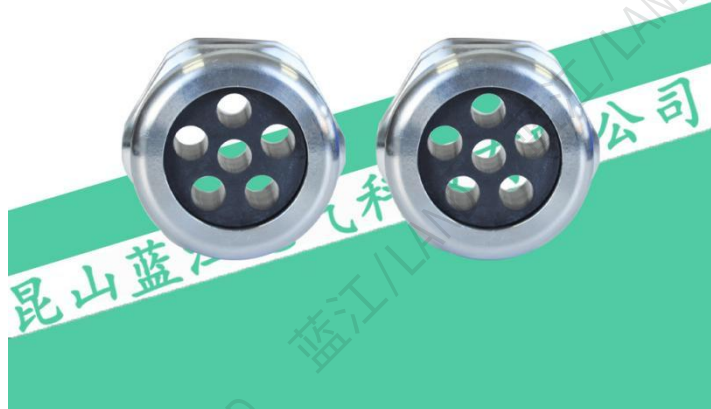

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

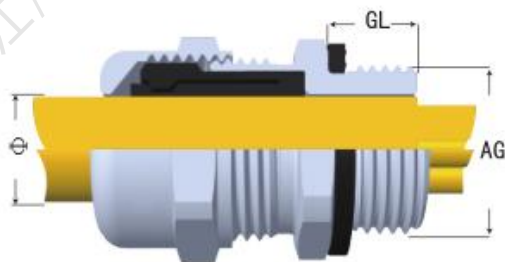

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG16-H6-02-SS	M16×1.5	16	1~2.1	9.5	20/21	50
MG18-H6-02-SS	M18×1.5	18	1~2.1	9.5	21/21	50
MG20-H6-03-SS	M20×1.5	20	2~3.5	12	24/26	50
MG20-H6-04-SS	M20×1.5	20	2~4	12	24/26	50
MG22-H6-03-SS	M22×1.5	22	2~3.5	12	26/26	50
MG22-H6-04-SS	M22×1.5	22	2~4	12	26/26	50
MG24-H6-03-SS	M24×1.5	24	2~3.5	10.5	28/26	50
MG24-H6-04-SS	M24×1.5	24	2~4	10.5	28/26	50
MG25-H6-05-SS	M25×1.5	25	3~5	12	30/31	50
MG27-H6-05-SS	M27×1.5(2)	27	3~5	12	30/31	50
MG30-H6-05-SS	M30×1.5(2)	30	3~5	12.5	34/31	50
MG32-H6-05-SS	M32×1.5	32	3~5	12.5	38/40	20
MG32-H6-07-SS	M32×1.5	32	4~7	12.5	38/40	20
MG36-H6-07-SS	M36×1.5(2)	36	4~7	13	42/40	20
MG40-H6-08-SS	M40×1.5	40	5~8	14	48/50	10
MG42-H6-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H6-08-SS	M48×2.0	48	5~8	15	58/50	10
MG50S-H6-08-SS	M50×1.5	50	5~8	15	58/50	10
MG63-H6-12-SS	M63×1.5	63	8~12	15	71/76	10
PG11-H6-02-SS	PG11	18.6	1~2.1	9.5	21/21	50
PG13.5-H6-03-SS	PG13.5	20.5	1.5~3	10.5	24/26	50
PG16-H6-03-SS	PG16	22.5	1.5~3	12	26/26	50
PG16-H6-04-SS	PG16	22.5	2~4	12	26/26	50
PG21-H6-05-SS	PG21	28.3	3~5	12	32/31	50
PG29-H6-05-SS	PG29	37	3~5	12.5	40/40	20
PG29-H6-07-SS	PG29	37	4~7	12.5	40/40	20
PG36-H6-08-SS	PG36	47	5~8	15	58/50	10
PG48-H6-12-SS	PG48	59.3	8~12	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G3/8-H6-02-SS	G3/8	16.66	1~2.1	9.5	21/21	50
G1/2-H6-03-SS	G1/2	20.4	1.5~3	12	24/26	50
G1/2-H6-04-SS	G1/2	20.4	2~4	12	24/26	50
G3/4-H6-05-SS	G3/4	26.66	3~5	12	30/31	50
G1-H6-05-SS	G1	33.2	3~5	15	38/40	20
G1-H6-07-SS	G1	33.2	4~7	15	38/40	20
G1-1/4-H6-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H6-08-SS	G1-1/2	47.8	5~8	15	55/50	10
G2-H6-12-SS	G2	59.6	14~17	15	71/76	10
NPT3/8-H6-02-SS	NPT3/8	16.66	1~2.1	10	21	50
NPT1/2-H6-03-SS	NPT1/2	20.4	1.5~3	13	26	50
NPT1/2-H6-04-SS	NPT1/2	20.4	2~4	13	26	50
NPT3/4-H6-05-SS	NPT3/4	26.66	3~5	13	31	50
NPT1-H6-05-SS	NPT1	33.2	3~5	15	40	20
NPT1-H6-07-SS	NPT1	33.2	4~7	15	40	20
NPT1-1/4-H6-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H6-08-SS	NPT1-1/2	47.8	5~8	15	50	10
NPT2-H6-12-SS	NPT2	59.6	14~17	15	76	10

七孔防爆不锈钢电缆防水接头

Seven hole stainless steel Explosion proof cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

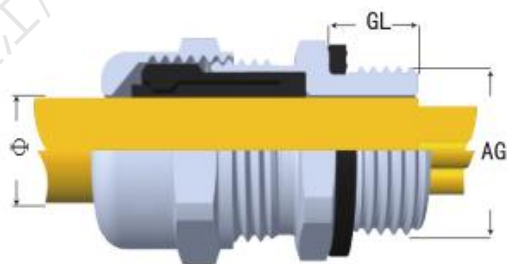

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG25-H7-04-SS	M25×1.5	25	2~4	12	30/31	50
MG27-H7-04-SS	M27×1.5(2)	27	2~4	12	30/31	50
MG30-H7-04-SS	M30×1.5(2)	30	2~4	12.5	34/31	50
MG32-H7-06-SS	M32×1.5	32	4~6	12.5	38/40	20
MG36-H7-06-SS	M36×1.5(2)	36	4~6	13	42/40	20
MG40-H7-08-SS	M40×1.5	40	5~8	14	48/50	10
MG42-H7-08-SS	M42×2.0	42	5~8	15	48/50	10
MG48-H7-08-SS	M48×2.0	48	5~8	15	58/50	10
MG50S-H7-08-SS	M50×1.5	50	5~8	15	58/50	10
PG21-H7-04-SS	PG21	28.3	2~4	12	32/31	50
PG29-H7-06-SS	PG29	37	4~6	12.5	40/40	20
PG36-H7-08-SS	PG36	47	5~8	15	58/50	10
G3/4-H7-04-SS	G3/4	26.66	2~4.3	12	30/31	50
G1-H7-06-SS	G1	33.2	4~6	15	38/40	20
G1-1/4-H7-08-SS	G1-1/4	41.9	5~8	15	48/50	10
G1-1/2-H7-08-SS	G1-1/2	47.8	5~8	15	55/50	10
NPT3/4-H7-04-SS	NPT3/4	26.66	2~4.3	13	31	50
NPT1-H7-06-SS	NPT1	33.2	4~6	15	40	20
NPT1-1/4-H7-08-SS	NPT1-1/4	41.9	5~8	15	50	10
NPT1-1/2-H7-08-SS	NPT1-1/2	47.8	5~8	15	50	10

八孔防爆不锈钢电缆防水接头

Eight hole stainless steel Explosion proof cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以同时锁紧多根电缆线, 保持防水密封性能不变

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

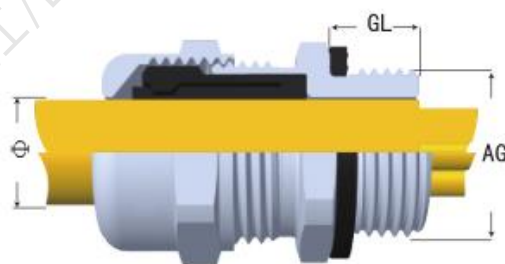

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG16-H8-02-SS	M16×1.5	16	1~2.1	15	22/22	50
MG18-H8-02-SS	M18×1.5	18	1~2.1	15	22/22	50
MG25-H8-04-SS	M25×1.5	25	2~4	15	33/33	50
MG27-H8-04-SS	M27×1.5 (2)	27	2~4	12	30/31	50
MG30-H8-04-SS	M30×1.5 (2)	30	2~4	12.5	34/31	50
MG32-H8-05-SS	M32×1.5	32	3~5	15	41/41	20
MG36-H8-05-SS	M36×1.5 (2)	36	3~5	13	42/40	20
MG40-H8-04-SS	M40×1.5	40	3~4	14	48/50	10
MG40-H8-06-SS	M40×1.5	40	4~6	14	48/50	10
MG42-H8-06-SS	M42×2.0	42	4~6	15	48/50	10
MG48-H8-06-SS	M48×2.0	48	4~6	15	58/50	10
MG50S-H8-06-SS	M50×1.5	50	4~6	15	58/50	10
PG11-H8-02-SS	PG11	18.6	1~2.1	9.5	21/21	50
PG21-H8-04-SS	PG21	28.3	2~4	12	32/31	50
PG29-H8-05-SS	PG29	37	3~5	12.5	40/40	20
PG36-H8-04-SS	PG36	47	3~4	15	58/50	10
PG36-H8-06-SS	PG36	47	4~6	15	58/50	10
G3/8-H8-02-SS	G3/8	16.66	1~2.1	9.5	21/21	50
G3/4-H8-04-SS	G3/4	26.66	2~4	12	30/31	50
G1-H8-05-SS	G1	33.2	3~5	15	38/40	20
G1-1/4-H8-04-SS	G1-1/4	41.9	3~4	15	48/50	10
G1-1/4-H8-06-SS	G1-1/4	41.9	4~6	15	48/50	10
G1-1/2-H8-04-SS	G1-1/2	47.8	3~4	15	55/50	10
G1-1/2-H8-06-SS	G1-1/2	47.8	4~6	15	55/50	10
NPT3/8-H8-02-SS	NPT3/8	16.66	1~2.1	10	21	50
NPT3/4-H8-04-SS	NPT3/4	26.66	2~4	13	31	50
NPT1-H8-05-SS	NPT1	33.2	3~5	15	40	20
NPT1-1/4-H8-04-SS	NPT1-1/4	41.9	3~4	15	50	10
NPT1-1/4-H8-06-SS	NPT1-1/4	41.9	4~6	15	50	10
NPT1-1/2-H8-04-SS	NPT1-1/2	47.8	3~4	15	50	10
NPT1-1/2-H8-06-SS	NPT1-1/2	47.8	4~6	15	50	10

九孔防爆不锈钢防水接头

Nine hole stainless steel Explosion proof cable gland

产品材料：304材质，可选316和316L

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

设计特点：多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆线，保持防水密封性能不变


Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

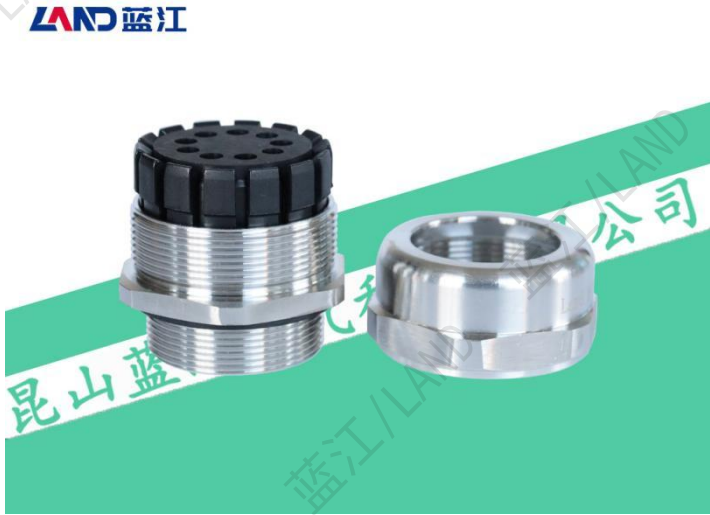

产品参数表（九孔）

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG40-H9-05-SS	M40×1.5	40	3~5	14	48/50	10
MG42-H9-05-SS	M42×2.0	42	3~5	15	48/50	10
MG48-H9-05-SS	M48×2.0	48	3~5	15	58/50	10
MG50S-H9-05-SS	M50×1.5	50	3~5	15	58/50	10
PG36-H9-05-SS	PG36	47	3~5	15	57/50	10
G1-1/4-H9-05-SS	G1-1/4	41.9	3~5	15	55/60	10
G1-1/2-H9-05-SS	G1-1/2	47.8	3~5	15	55/60	10
NPT1-1/4-H9-05-SS	NPT1-1/4	41.9	3~5	15	60	10
NPT1-1/2-H9-05-SS	NPT1-1/2	47.8	3~5	15	60	10

十孔防爆不锈钢防水接头

Ten hole stainless steel Explosion proof cable gland



产品材料：304材质，可选316和316L

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

设计特点：多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆线，保持防水密封性能不变



Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Porous sealing ring split design, high protection level, strong tensile strength, can lock multiple cables at the same time, and maintain waterproof sealing performance unchanged

产品参数表（十孔）

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG40-H10-05-SS	M40×1.5	40	3~5	14	48/50	10
MG42-H10-05-SS	M42×2.0	42	3~5	15	48/50	10
MG48-H10-05-SS	M48×2.0	48	3~5	15	58/50	10
PG36-H10-05-SS	PG36	47	3~5	15	57/50	10
G1-1/4-H10-05-SS	G1-1/4	41.9	3~5	15	55/60	10
G1-1/2-H10-05-SS	G1-1/2	47.8	3~5	15	55/60	10
NPT1-1/4-H10-05-SS	NPT1-1/4	41.9	3~5	15	60	10
NPT1-1/2-H10-05-SS	NPT1-1/2	47.8	3~5	15	60	10

内螺纹不锈钢电缆防水接头

Internal thread Stainless Steel Cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2



温度测试: -40°C~105°C, 短时可达120°C

设计特点: 内螺纹连接设计, 密封圈默认装配分体单孔内芯, 也可以装配多孔, 扁孔等, 产品可以通过内丝连接各

类外丝产品, 防护等级高, 产品抗拉力强

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

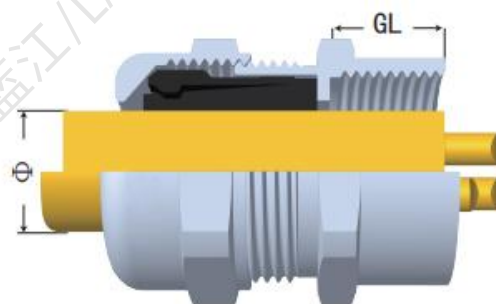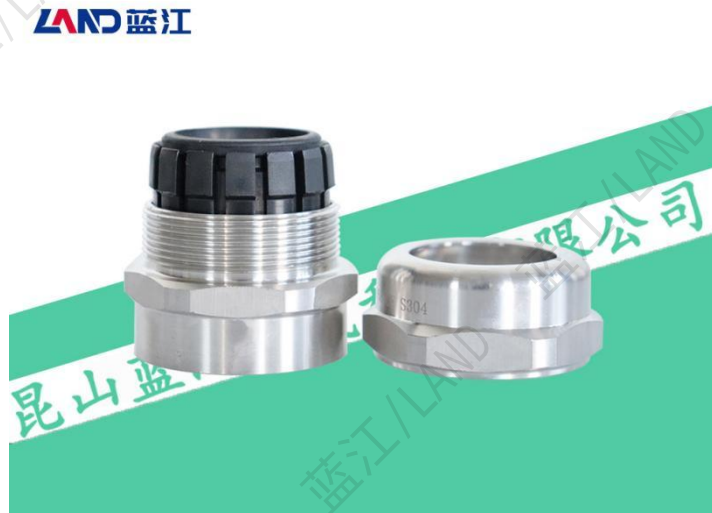

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Internal thread connection design, the sealing ring is equipped with a split single hole inner core by default, and can also be equipped with multiple holes, flat holes, etc. The product can be connected to various external thread products through internal threads, with high protection level and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
MG12F-08-SS	M12×1.5	4~8	9	15/17	50
MG12F-05-SS	M12×1.5	3~5.5	9	15/17	50
MG12F-03-SS	M12×1.5	1.5~3	9	15/17	50
MG16F-10-SS	M16×1.5	6~10	9.5	20/21	50
MG16F-07-SS	M16×1.5	4~7	9.5	20/21	50
MG16F-05-SS	M16×1.5	3~5	9.5	20/21	50
MG16F-04-SS	M16×1.5	2~4	9.5	20/21	50
MG18F-10-SS	M18×1.5	6~10	9.5	21/21	50
MG18F-07-SS	M18×1.5	4~7	9.5	21/21	50
MG20F-14-SS	M20×1.5	8~14	12	24/26	50
MG20F-12-SS	M20×1.5	7~12	12	24/24	50
MG20F-11-SS	M20×1.5	6~11	12	24/24	50
MG20F-09-SS	M20×1.5	5~9	12	24/24	50
MG22F-14-SS	M22×1.5	8~14	12	26/26	50
MG22F-11-SS	M22×1.5	7~11	12	26/26	50
MG22F-09-SS	M22×1.5	6~9	12	26/26	50
MG25F-18-SS	M25×1.5	13~18	12	30/31	50
MG25F-16-SS	M25×1.5	12~16	12	30/31	50
MG27F-18-SS	M27×1.5 (2)	13~18	12	30/31	50
MG27F-16-SS	M27×1.5 (2)	11~16	12	30/31	50
MG30F-18-SS	M30×1.5	13~18	12.5	34/31	50
MG32F-25-SS	M32×1.5	18~25	12.5	38/40	20
MG32F-22-SS	M32×1.5	17~22	12.5	38/40	20
MG40F-31-SS	M40×1.5	25~31	14	48/50	10
MG40F-25-SS	M40×1.5	18~25	14	48/50	10
MG50F-41-SS	M50×1.5	33~41	15	58/60	10
MG50F-33-SS	M50×1.5	25~33	15	58/60	10
MG63F-54-SS	M63×1.5	46~54	15	71/76	10
MG63F-46-SS	M63×1.5	38~46	15	71/76	10

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
PG7F-08-SS	PG7	4~8	9	15/17	50
PG7F-05-SS	PG7	3~5.5	9	15/17	50
PG7F-03-SS	PG7	1.5~3	9	15/17	50
PG9F-08-SS	PG9	4~8	9	17/17	50
PG9F-05-SS	PG9	3~5.5	9	17/17	50
PG9F-03-SS	PG9	1.5~3	9	17/17	50
PG11F-10-SS	PG11	6~10	9.5	21/21	50
PG11F-07-SS	PG11	4~7	9.5	21/21	50
PG11F-05-SS	PG11	3~5	9.5	21/21	50
PG11F-04-SS	PG11	2~4	9.5	21/21	50
PG13.5F-12-SS	PG13.5	7~12	10.5	24/24	50
PG13.5F-11-SS	PG13.5	6~11	10.5	24/24	50
PG13.5F-09-SS	PG13.5	5~9	10.5	24/24	50
PG16F-14-SS	PG16	8~14	12	26/26	50
PG16F-11-SS	PG16	7~11	12	26/26	50
PG16F-09-SS	PG16	6~9	12	26/26	50
PG16F-06-SS	PG16	3~6	12	26/26	50
PG21F-18-SS	PG21	13~18	12	32/31	50
PG21F-16-SS	PG21	12~16	12	32/31	50
PG21F-14-SS	PG21	8~14	12	32/31	50
PG21F-10-SS	PG21	6~10	12	32/31	50
PG29F-25-SS	PG29	18~25	12.5	40/40	20
PG29F-22-SS	PG29	17~22	12.5	40/40	20
PG36F-31-SS	PG36	25~31	15	58/50	10
PG36F-25-SS	PG36	18~25	15	58/50	10
PG42F-41-SS	PG42	33~41	15	60/60	10
PG42F-33-SS	PG42	25~33	15	60/60	10
PG48F-44-SS	PG48	36~44	15	71/76	10
PG48F-54-SS	PG48	46~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	GL mm	nut/cap mm	PCS
G1/4F-08-SS	G1/4	4~8	9	17/17	50
G1/4F-05-SS	G1/4	3~5.5	9	17/17	50
G3/8F-10-SS	G3/8	6~10	9.5	21/21	50
G3/8F-07-SS	G3/8	4~7	9.5	21/21	50
G1/2F-14-SS	G1/2	8~14	12	24/26	50
G1/2F-12-SS	G1/2	7~12	12	24/24	50
G1/2F-11-SS	G1/2	6~11	12	24/24	50
G1/2F-09-SS	G1/2	5~9	12	24/24	50
G3/4F-18-SS	G3/4	13~18	12	30/31	50
G3/4F-16-SS	G3/4	12~16	12	30/31	50
G1F-25-SS	G1	18~25	15	38/40	20
G1F-22-SS	G1	17~22	15	38/40	20
G1-1/4F-31-SS	G1-1/4	25~31	15	48/50	10
G1-1/4F-25-SS	G1-1/4	18~25	15	48/50	10
G1-1/2F-31-SS	G1-1/2	25~31	15	55/50	10
G1-1/2F-25-SS	G1-1/2	18~25	15	55/50	10
G2F-44-SS	G2	36~44	15	71/65	1
NPT1/4F-08-SS	NPT1/4	4~8	9	17	50
NPT1/4F-05-SS	NPT1/4	3~5.5	9	17	50
NPT3/8F-10-SS	NPT3/8	6~10	10	21	50
NPT1/2F-14-SS	NPT1/2	8~14	13	26	50
NPT1/2F-12-SS	NPT1/2	7~12	11	24	50
NPT1/2F-11-SS	NPT1/2	6~11	11	24	50
NPT1/2F-09-SS	NPT1/2	5~9	11	24	50
NPT3/4F-18-SS	NPT3/4	13~18	13	31	50
NPT3/4F-16-SS	NPT3/4	12~16	13	31	50
NPT1F-25-SS	NPT1	18~25	15	40	20
NPT1F-22-SS	NPT1	17~22	15	40	20
NPT1-1/4F-31-SS	NPT1-1/4	25~31	15	50	10
NPT1-1/4F-25-SS	NPT1-1/4	18~25	15	50	10
NPT1-1/2F-31-SS	NPT1-1/2	25~31	15	50	10
NPT1-1/2F-25-SS	NPT1-1/2	18~25	15	50	10
NPT2F-44-SS	NPT2	36~44	15	65	10

接管式防爆不锈钢防水接头

Pipe connected stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 内外丝接管设计, 密封圈默认为单孔内芯,

也可以装配多孔, 扁孔等, 产品外丝连接设备, 内丝

可以连接各类管件, 符合防爆Ex eb IIC Gb/Ex tb IIIC Db标准。

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

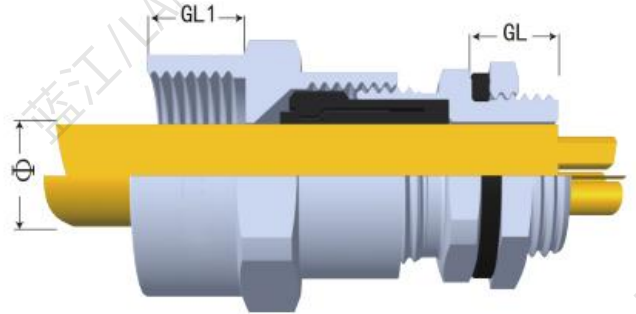

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Internal and external wire connection design, the sealing ring defaults to a single hole inner core, but can also be equipped with multiple holes, flat holes, etc. The product's external wire connection equipment and internal wire can be connected to various pipe fittings, complying with explosion-proof Ex eb IIC Gb/Ex tb IIIC Db standards

Application:Electrical, marine, electrical, mechanical equipment, rail transit

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

常规接管参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread L	Wrench Size	packaging
PN.	M	F	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M12-08-SS	M12×1.5	M12×1.5	4~8	9	15/17	50
JGEX-M16-08-SS	M16×1.5	M16×1.5	4~8	9.5	20/17	50
JGEX-M16-10-SS	M16×1.5	M16×1.5	6~10	9.5	20/21	50
JGEX-M20-14-SS	M20×1.5	M20×1.5	8~14	12	24/26	50
JGEX-M20-12-SS	M20×1.5	M20×1.5	7~12	12	24/24	50
JGEX-M20-11-SS	M20×1.5	M20×1.5	6~10.5	12	24/24	50
JGEX-M20-09-SS	M20×1.5	M20×1.5	5~9	12	24/24	50
JGEX-M22-14-SS	M22×1.5	M22×1.5	8~14	12	26/26	50
JGEX-M24-14-SS	M24×1.5	M24×1.5	8~14	10.5	28/26	50
JGEX-M25-18-SS	M25×1.5	M25×1.5	13~18	12	30/31	50
JGEX-M32-25-SS	M32×1.5	M32×1.5	18~25	12.5	38/40	20
JGEX-M40-31-SS	M40×1.5	M40×1.5	25~31	14	48/50	10
JGEX-M50-41-SS	M50×1.5	M50×1.5	33~41	15	58/60	10
JGEX-M63-44-SS	M63×1.5	M63×1.5	36~44	15	71/65	10
JGEX-G1/4-08-SS	G1/4	G1/4	4~8	9	17/17	50
JGEX-G3/8-10-SS	G3/8	G3/8	6~10	9.5	21/21	50
JGEX-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
JGEX-G1/2-12-SS	G1/2	G1/2	7~12	12	24/24	50
JGEX-G3/4-18-SS	G3/4	G3/4	13~18	12	31/31	50
JGEX-G1-25-SS	G1	G1	18~25	12.5	38/40	20
JGEX-G1-1/4-31-SS	G1-1/4	G1-1/4	25~31	14	48/50	10
JGEX-G1-1/2-31-SS	G1-1/2	G1-1/2	25~31	15	58/50	10
JGEX-G2-44-SS	G2	G2	36~44	15	71/65	10
JGEX-NPT1/4-08-SS	NPT1/4	NPT1/4	4~8	9	17	50
JGEX-NPT3/8-10-SS	NPT3/8	NPT3/8	6~10	10	21	50
JGEX-NPT1/2-14-SS	NPT1/2	NPT1/2	8~14	13	26	50
JGEX-NPT1/2-12-SS	NPT1/2	NPT1/2	7~12	12	24/24	50
JGEX-NPT3/4-18-SS	NPT3/4	NPT3/4	13~18	12	30/31	50
JGEX-NPT1-25-SS	NPT1	NPT1	18~25	12.5	38/40	20
JGEX-NPT1-1/4-31-SS	NPT1-1/4	NPT1-1/4	25~31	14	48/50	10
JGEX-NPT1-1/2-31-SS	NPT1-1/2	NPT1-1/2	25~31	15	58/50	10
JGEX-NPT2-44-SS	NPT2	NPT2	36~44	15	71/65	10

非标接管参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread L	Wrench Size	packaging
PN.	M	F	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M20-G1/2-12-SS	M20×1.5	G1/2	7~12	12	24/24	50
JGEX-M20-G3/4-12-SS	M20×1.5	G3/4	7~12	12	24/31	50
JGEX-M20-NPT1/2-12-SS	M20×1.5	NPT1/2	7~12	12	24/24	50
JGEX-M20-NPT3/4-12-SS	M20×1.5	NPT3/4	7~12	12	24/31	50
JGEX-M20-M25-12-SS	M20×1.5	M25×1.5	7~12	12	24/31	50
JGEX-M25-G3/4-18-SS	M25×1.5	G3/4	13~18	12	30/31	50
JGEX-M25-G1-18-SS	M25×1.5	G1	13~18	12	30/40	50
JGEX-M25-NPT3/4-18-SS	M25×1.5	NPT3/4	13~18	12	30/31	50
JGEX-M25-NPT1-18-SS	M25×1.5	NPT1	13~18	12	30/40	50
JGEX-M25-M32-18-SS	M25×1.5	M32×1.5	13~18	12	30/40	50
JGEX-M32-G1-25-SS	M32×1.5	G1	18~25	12.5	38/40	20
JGEX-M32-NPT1-25-SS	M32×1.5	NPT1	18~25	12.5	38/40	20
JGEX-G1/2-M20-12-SS	G1/2	M20×1.5	7~12	12	24/24	50
JGEX-G1/2-M25-12-SS	G1/2	M25×1.5	7~12	12	24/31	50
JGEX-G1/2-NPT1/2-12-SS	G1/2	NPT1/2	7~12	12	24/24	50
JGEX-G1/2-NPT3/4-12-SS	G1/2	NPT3/4	7~12	12	24/31	50
JGEX-G1/2-G3/4-12-SS	G1/2	G3/4	7~12	12	24/31	50
JGEX-G3/4-M25-18-SS	G3/4	M25×1.5	13~18	12	31/31	50
JGEX-G3/4-NPT3/4-18-SS	G3/4	NPT3/4	13~18	12	31/31	50
JGEX-G1-M32-25-SS	G1	M32×1.5	18~25	12.5	38/40	20
JGEX-G1-NPT1-25-SS	G1	NPT1	18~25	12.5	38/40	20
JGEX-NPT1/2-M20-12-SS	NPT1/2	M20×1.5	7~12	12	24/24	50
JGEX-NPT1/2-M25-12-SS	NPT1/2	M25×1.5	7~12	12	24/31	50
JGEX-NPT1/2-G1/2-12-SS	NPT1/2	G1/2	7~12	12	24/24	50
JGEX-NPT1/2-G3/4-12-SS	NPT1/2	G3/4	7~12	12	24/31	50
JGEX-NPT1/2-NPT3/4-12-SS	NPT1/2	NPT3/4	7~12	12	24/31	50
JGEX-NPT3/4-M25-18-SS	NPT3/4	M25×1.5	13~18	12	30/31	50
JGEX-NPT3/4-G3/4-18-SS	NPT3/4	G3/4	13~18	12	30/31	50
JGEX-NPT1-M32-25-SS	NPT1	M32×1.5	18~25	12.5	38/40	20
JGEX-NPT1-G1-25-SS	NPT1	G1	18~25	12.5	38/40	20

双锁紧不锈钢电缆防水接头

Double locking stainless steel cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 双层锁紧密封设计, 密封圈默认为单孔内芯,


也可以装配多孔, 扁孔内芯等, 可同时锁紧电缆与外护

套, 防护等级高, 抗拉力强, 广泛应用于各类机械设备

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

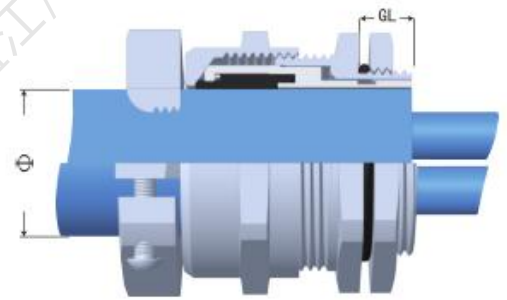

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Double layer locking seal design, the sealing ring defaults to a single hole inner core, but can also be equipped with multiple holes, flat hole inner cores, etc. It can simultaneously lock cables and outer sheaths, provide high protection, and has strong tensile strength. It is widely used in various mechanical equipment

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
SJ-M12-08-SS	M12×1.5	12	4~8	9	15/17	50
SJ-M12-05-SS	M12×1.5	12	3~5.5	9	15/17	50
SJ-M14-08-SS	M14×1.5	14	4~8	9	17/17	50
SJ-M14-05-SS	M14×1.5	14	3~5.5	9	17/17	50
SJ-M16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
SJ-M16S-05-SS	M16×1.5	16	3~5.5	9.5	20/17	50
SJ-M16-10-SS	M16×1.5	16	6~10	9.5	20/21	50
SJ-M16-07-SS	M16×1.5	16	4~7	9.5	20/21	50
SJ-M18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
SJ-M18-07-SS	M18×1.5	18	4~7	9.5	21/21	50
SJ-M20-14-SS	M20×1.5	20	8~14	12	24/26	50
SJ-M20-12-SS	M20×1.5	20	7~12	12	24/24	50
SJ-M22-14-SS	M22×1.5	22	8~14	12	26/26	50
SJ-M24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
SJ-M25-18-SS	M25×1.5	25	13~18	12	30/31	50
SJ-M25-16-SS	M25×1.5	25	12~16	12	30/31	50
SJ-M27-18-SS	M27×1.5(2)	27	13~18	12	30/31	50
SJ-M30-18-SS	M30×1.5(2)	30	13~18	12.5	34/31	50
SJ-M32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
SJ-M32-22-SS	M32×1.5	32	17~22	12.5	38/40	20
SJ-M33-25-SS	M33×2.0	33	18~25	14.5	38/40	20
SJ-M36-25-SS	M36×1.5(2)	36	18~25	13	42/40	20
SJ-M40-31-SS	M40×1.5	40	25~31	14	48/50	10
SJ-M40-25-SS	M40×1.5	40	18~25	14	48/50	10
SJ-M42-31-SS	M42×2.0	42	25~31	15	48/50	10
SJ-M48-31-SS	M48×2.0	48	25~31	15	58/50	10
SJ-M50-41-SS	M50×1.5	50	33~41	15	58/60	10
SJ-M50-33-SS	M50×1.5	50	25~33	15	58/60	10
SJ-M60-41-SS	M60×2.0	60	33~41	15	71/60	10
SJ-M63-41-SS	M63×1.5	63	33~41	15	71/60	10
SJ-M63-54-SS	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG Φ mm	mm	mm	nut/cap mm	PCS
SJ-PG7-08-SS	PG7	12.5	4~8	9	15/17	50
SJ-PG7-05-SS	PG7	12.5	3~5.5	9	15/17	50
SJ-PG9-08-SS	PG9	15.2	4~8	9	17/17	50
SJ-PG9-05-SS	PG9	15.2	3~5.5	9	17/17	50
SJ-PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
SJ-PG11-07-SS	PG11	18.6	4~7	9.5	21/21	50
SJ-PG13.5-14-SS	PG13.5	20.4	8~14	10.5	24/26	50
SJ-PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
SJ-PG13.5-11-SS	PG13.5	20.4	6~11	10.5	24/24	50
SJ-PG13.5-09-SS	PG13.5	20.4	5~9	10.5	24/24	50
SJ-PG16-14-SS	PG16	22.5	8~14	12	26/26	50
SJ-PG16-11-SS	PG16	22.5	7~11	12	26/26	50
SJ-PG16-06-SS	PG16	22.5	3~6	12	26/26	50
SJ-PG21-18-SS	PG21	28.3	13~18	12	32/31	50
SJ-PG21-16-SS	PG21	28.3	12~16	12	32/31	50
SJ-PG21-14-SS	PG21	28.3	8~14	12	32/31	50
SJ-PG21-10-SS	PG21	28.3	6~10	12	32/31	50
SJ-PG29-25-SS	PG29	37	18~25	12.5	40/40	20
SJ-PG29-22-SS	PG29	37	17~22	12.5	40/40	20
SJ-PG36-31-SS	PG36	47	25~31	15	58/50	10
SJ-PG36-25-SS	PG36	47	18~25	15	58/50	10
SJ-PG42-41-SS	PG42	54	33~41	15	60/60	10
SJ-PG42-33-SS	PG42	54	25~33	15	60/60	10
SJ-PG48-41-SS	PG48	59.3	33~41	15	71/65	10
SJ-PG48-44-SS	PG48	59.3	36~44	15	71/65	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G (PF)	Φ mm	mm	mm	nut/cap mm	PCS
SJ-G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
SJ-G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
SJ-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
SJ-G1/2-12-SS	G1/2	20.99	7~12	12	24/26	50
SJ-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
SJ-G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
SJ-G1-25-SS	G1	33.25	18~25	15	38/40	20
SJ-G1-22-SS	G1	33.25	17~22	15	38/40	20
SJ-G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
SJ-G1-1/4-25-SS	G1-1/4	41.91	18~25	15	48/50	10
SJ-G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
SJ-G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
SJ-G2-41-SS	G2	59.61	33~41	15	71/65	1
SJ-NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
SJ-NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
SJ-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
SJ-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	26	50
SJ-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
SJ-NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
SJ-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
SJ-NPT1-22-SS	NPT1	33.23	17~22	15	40	20
SJ-NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
SJ-NPT1-1/4-25-SS	NPT1-1/4	41.98	18~25	15	50	10
SJ-NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
SJ-NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
SJ-NPT2-41-SS	NPT2	60.09	33~41	15	65	10

EMC型-防磁波不锈钢防水接头

EMC style stainless steel Shielded cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 多爪式防磁波片设计, 紫铜材质制成, 具有防电磁干扰, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

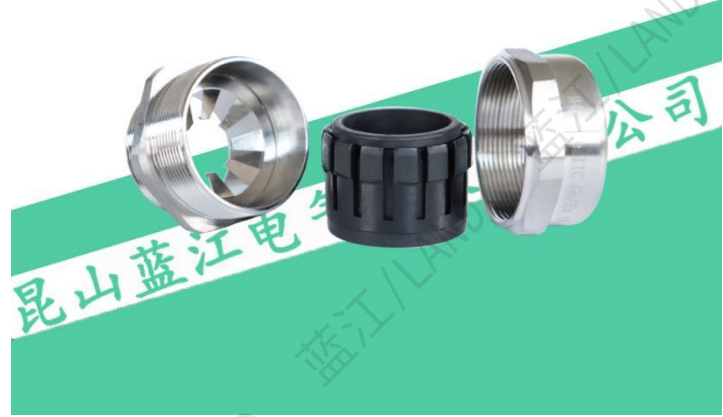

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Multi claw anti magnetic wave plate design, made of purple copper material, with characteristics of anti electromagnetic interference, high protection level, strong tensile strength, etc

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG10-06-SS	M10×1(1.5)	10	3~6	7	14/14	100
EMC-MG12-08-SS	M12×1.5	12	4~8	9	15/17	50
EMC-MG12-05-SS	M12×1.5	12	3~5	9	15/17	50
EMC-MG16S-08-SS	M16×1.5	16	4~8	9.5	20/17	50
EMC-MG16-10-SS	M16×1.5	16	6~10	9.5	20/21	50
EMC-MG16-07-SS	M16×1.5	16	4~7	9.5	20/21	50
EMC-MG18-10-SS	M18×1.5	18	6~10	9.5	21/21	50
EMC-MG20S-12-SS	M20×1.5	20	7~12	12	24/24	50
EMC-MG20S-09-SS	M20×1.5	20	5~9	12	24/24	50
EMC-MG20-14-SS	M20×1.5	20	8~14	12	24/26	50
EMC-MG22-14-SS	M22×1.5	22	8~14	12	26/26	50
EMC-MG24-14-SS	M24×1.5	24	8~14	10.5	28/26	50
EMC-MG25-18-SS	M25×1.5	25	13~18	12	30/31	50
EMC-MG25-16-SS	M25×1.5	25	11~16	12	30/31	50
EMC-MG27-18-SS	M27×1.5(2)	27	13~18	12	30/31	50
EMC-MG30-18-SS	M30×1.5(2)	30	13~18	12.5	34/31	50
EMC-MG32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
EMC-MG32-22-SS	M32×1.5	32	16~22	12.5	38/40	20
EMC-MG33-25-SS	M33×2.0	33	18~25	14.5	38/40	20
EMC-MG36-25-SS	M36×1.5(2)	36	18~25	13	42/40	20
EMC-MG40-31-SS	M40×1.5	40	25~31	14	48/50	10
EMC-MG40-25-SS	M40×1.5	40	18~25	14	48/50	10
EMC-MG42-31-SS	M42×2.0	42	25~31	15	48/50	10
EMC-MG48-31-SS	M48×2.0	48	25~31	15	58/50	10
EMC-MG50-41-SS	M50×1.5	50	33~41	15	58/60	10
EMC-MG50-33-SS	M50×1.5	50	26~33	15	58/60	10
EMC-MG60-44-SS	M60×2.0	60	36~44	15	71/65	10
EMC-MG63-44-SS	M63×1.5	63	36~44	15	71/65	10
EMC-MG63-54-SS	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
EMC-PG7-08-SS	PG7	12.5	4~8	9	15/17	50
EMC-PG9-08-SS	PG9	15.2	4~8	9	17/17	50
EMC-PG11-10-SS	PG11	18.6	6~10	9.5	21/21	50
EMC-PG13.5-12-SS	PG13.5	20.4	7~12	10.5	24/24	50
EMC-PG16-14-SS	PG16	22.5	8~14	12	26/26	50
EMC-PG19-14-SS	PG19	22.5	8~14	10.5	28/26	50
EMC-PG21-18-SS	PG21	28.3	13~18	12	32/31	50
EMC-PG29-25-SS	PG29	37	18~25	12.5	40/40	20
EMC-PG36-31-SS	PG36	47	25~31	15	58/50	10
EMC-PG42-41-SS	PG42	54	33~41	15	60/60	10
EMC-PG48-44-SS	PG48	59.3	36~44	15	71/65	10
EMC-G1/4-08-SS	G1/4	13.15	4~8	9	17/17	50
EMC-G3/8-10-SS	G3/8	16.66	6~10	9.5	21/21	50
EMC-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
EMC-G1/2-12-SS	G1/2	20.99	7~12	12	24/24	50
EMC-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
EMC-G1-25-SS	G1	33.25	18~25	15	38/40	20
EMC-G1-1/4-31-SS	G1-1/4	41.91	25~31	15	48/50	10
EMC-G1-1/2-31-SS	G1-1/2	47.8	25~31	15	55/50	10
EMC-G1-1/2-41-SS	G1-1/2	47.8	33~41	15	55/60	10
EMC-G2-44-SS	G2	59.61	36~44	15	71/65	1
EMC-NPT1/4-08-SS	NPT1/4	13.15	4~8	9	17	50
EMC-NPT3/8-10-SS	NPT3/8	17.05	6~10	10	21	50
EMC-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
EMC-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	24	50
EMC-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
EMC-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
EMC-NPT1-1/4-31-SS	NPT1-1/4	41.98	25~31	15	50	10
EMC-NPT1-1/2-31-SS	NPT1-1/2	48.05	25~31	15	50	10
EMC-NPT1-1/2-41-SS	NPT1-1/2	48.05	33~41	15	60	10
EMC-NPT2-44-SS	NPT2	60.09	36~44	15	65	10

KEMC型-铠装防磁波不锈钢接头

KEMC style stainless steel armor cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 压环式防磁波设计, 同时适用于铠装电缆, 具有防电磁干扰, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

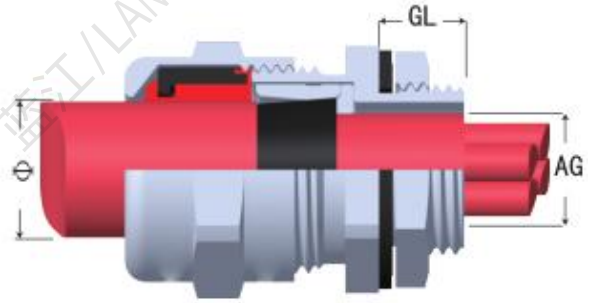

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Pressure ring anti magnetic wave design, suitable for armored cables, with anti electromagnetic interference, high protection level, strong tensile strength and other characteristics

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	PCS
KEMC-M16-10-SS	M16×1.5	16	6~10	9	50
KEMC-M18-10-SS	M18×1.5	18	6~10	9	50
KEMC-M20-10-SS	M20×1.5	20	6~10	10	50
KEMC-M20-14-SS	M20×1.5	20	8~14	10	50
KEMC-M20-16-SS	M20×1.5	20	11~16	10	50
KEMC-M20-18-SS	M20×1.5	20	13~18	10	50
KEMC-M20-20-SS	M20×1.5	20	15~20	10	50
KEMC-M22-14-SS	M22×1.5	20	8~14	10	50
KEMC-M24-14-SS	M22×1.5	20	8~14	10	50
KEMC-M25-14-SS	M25×1.5	25	8~14	12	20
KEMC-M25-16-SS	M25×1.5	25	11~16	12	20
KEMC-M25-18-SS	M25×1.5	25	13~18	12	20
KEMC-M25-21-SS	M25×1.5	25	16~21	12	20
KEMC-M25-24-SS	M25×1.5	25	17~24	12	20
KEMC-M27-18-SS	M27×1.5/2	27	13~18	12	20
KEMC-M30-21-SS	M30×1.5/2	30	16~21	12	20
KEMC-M32-25-SS	M32×1.5	32	18~25	12	10
KEMC-M32-28-SS	M32×1.5	32	20~28	12	10
KEMC-M36-25-SS	M36×1.5/2	32	18~25	12	10
KEMC-M40-35-SS	M40×1.5	40	26~35	15	10
KEMC-M40-38-SS	M40×1.5	40	31~38	15	10
KEMC-M42-35-SS	M42×2.0	42	26~35	15	10
KEMC-M48-38-SS	M48×2.0	48	31~38	15	10
KEMC-M50-41-SS	M50×1.5	50	34~41	15	5
KEMC-M50-44-SS	M50×1.5	50	37~44	15	5
KEMC-M63-50-SS	M63×1.5	63	40~50	18	1
KEMC-M63-55-SS	M63×1.5	63	43~55	18	1
KEMC-M75-68-SS	M75×2.0	63	54~68	18	1
KEMC-M90-78-SS	M75×2.0	63	65~78	18	1

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	PCS
KEMC-G1/2-14-SS	G1/2	20.99	8~14	10	50
KEMC-G1/2-18-SS	G1/2	20.99	13~18	10	50
KEMC-G1/2-21-SS	G1/2	20.99	16~21	10	50
KEMC-G3/4-18-SS	G3/4	26.44	13~18	12	20
KEMC-G3/4-21-SS	G3/4	26.44	16~21	12	20
KEMC-G3/4-24-SS	G3/4	26.44	17~24	12	20
KEMC-G1-25-SS	G1	33.25	18~25	12	10
KEMC-G1-28-SS	G1	33.25	20~28	12	10
KEMC-G1-1/4-35-SS	G1-1/4	41.91	26~35	15	10
KEMC-G1-1/4-38-SS	G1-1/4	41.91	31~38	15	10
KEMC-G1-1/2-41-SS	G1-1/2	47.8	34~41	15	5
KEMC-G1-1/2-44-SS	G1-1/2	47.8	37~44	15	5
KEMC-G2-50-SS	G2	59.61	40~50	18	1
KEMC-G2-55-SS	G2	59.61	43~55	18	1
KEMC-NPT1/2-14-SS	NPT1/2	20.99	8~14	10	50
KEMC-NPT1/2-18-SS	NPT1/2	20.99	13~18	10	50
KEMC-NPT1/2-21-SS	NPT1/2	20.99	16~21	10	50
KEMC-NPT3/4-18-SS	NPT3/4	26.44	13~18	12	20
KEMC-NPT3/4-21-SS	NPT3/4	26.44	16~21	12	20
KEMC-NPT3/4-24-SS	NPT3/4	26.44	17~24	12	20
KEMC-NPT1-25-SS	NPT1	33.25	18~25	12	10
KEMC-NPT1-28-SS	NPT1	33.25	20~28	12	10
KEMC-NPT1-1/4-35-SS	NPT1-1/4	41.91	26~35	15	10
KEMC-NPT1-1/4-38-SS	NPT1-1/4	41.91	31~38	15	10
KEMC-NPT1-1/2-41-SS	NPT1-1/2	47.8	34~41	15	5
KEMC-NPT1-1/2-44-SS	NPT1-1/2	47.8	37~44	15	5
KEMC-NPT2-50-SS	NPT2	59.61	40~50	18	1
KEMC-NPT2-55-SS	NPT2	59.61	43~55	18	1

防折弯不锈钢电缆防水接头

Stress relief stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本产品为防水接头配合耐扭弹簧组合而成, 具有保护电缆耐折弯, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C


Design Features: This product is composed of a cable gland combined with a torsion resistant spring, which has the characteristics of protecting the cable from bending, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



防折弯螺帽 密封圈 基本主体 垫片 螺母

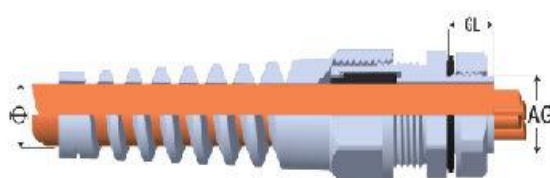

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-P-06-SS	M12×1.5	12	3~6	7	14	20
MG16-P-08-SS	M16×1.5	16	4~8	7	18	20
MG18-P-10-SS	M18×1.5	18	6~10	8	20	20
MG20-P-14-SS	M20×1.5	20	8~14	8	22	20
MG20-P-12-SS	M20×1.5	20	8~12	8	24	20
MG22-P-14-SS	M22×1.5	22	8~14	8	24	20
MG25-P-18-SS	M25×1.5	25	13~18	9	27	10
MG27-P-18-SS	M27×1.5	27	13~18	9	30	10
MG30-P-18-SS	M30×1.5	30	13~18	10	32	10
MG32-P-25-SS	M32×1.5	32	18~25	10	34	10
PG7-P-06-SS	PG7	12.5	3~6	7	14	20
PG9-P-08-SS	PG9	15.2	4~8	7	18	20
PG11-P-10-SS	PG11	18.6	6~10	8	20	20
PG13.5-P-12-SS	PG13.5	20.5	8~12	8	24	20
PG16-P-14-SS	PG16	22.5	8~14	8	24	20
PG21-P-18-SS	PG21	28.3	13~18	9	27	10
PG29-P-25-SS	PG29	37	18~25	10	34	10
G1/4-P-06-SS	G1/4	13.15	3~6	7	14	20
G3/8-P-10-SS	G3/8	16.66	6~10	8	20	20
G1/2-P-12-SS	G1/2	20.99	8~12	8	24	20
G1/2-P-14-SS	G1/2	20.99	8~14	8	24	20
G3/4-P-18-SS	G3/4	26.44	13~18	9	27	10
G1-P-25-SS	G1	33.23	18~25	10	34	10

硅胶不锈钢电缆防水接头

Silicone stainless steel cable gland

产品材料：304材质，可选316和316L

螺纹规格：公制M牙，其他螺纹接受定制


产品特性：符合CE，IP68

温度测试：-20℃~180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，耐高温，防护等级高

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：默认不附螺母，如需316及316L请另外说明

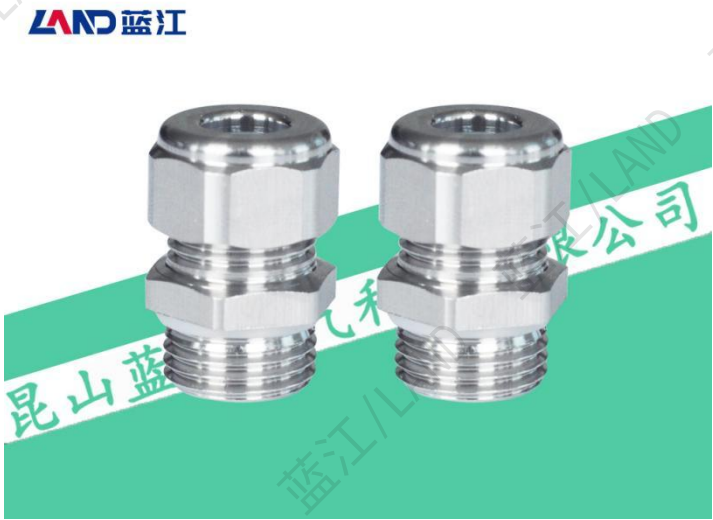

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term 220 ° C

Design Features: Silicone sealing ring, high temperature resistance, high protection level

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12C-06-SS	M12×1.5	12	3~6	7	17	50
MG16C-08-SS	M16×1.5	16	5~8	8	18	50
MG20C-12-SS	M20×1.5	20	10~12	8	22	50

耐高温不锈钢电缆防水接头

High temperature stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68


温度测试: $-20^{\circ}\text{C} \sim 180^{\circ}\text{C}$, 短时可达 220°C

设计特点: 本产品采用改性硅橡胶制成, 具有耐高温, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

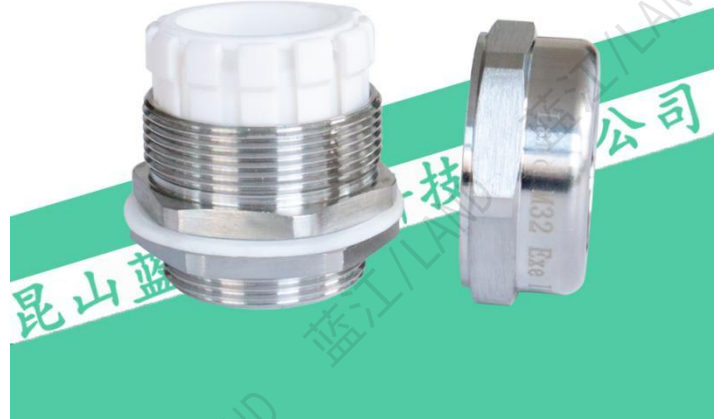

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread


Product Features: Compliant with CE, IP68

Temperature test: -20°C to 180°C , short-term up to 220°C

Design Features: This product is made of modified silicone rubber, which has the characteristics of high temperature resistance, high protection level, and strong tensile strength. The rubber and clamping claws are both white.

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

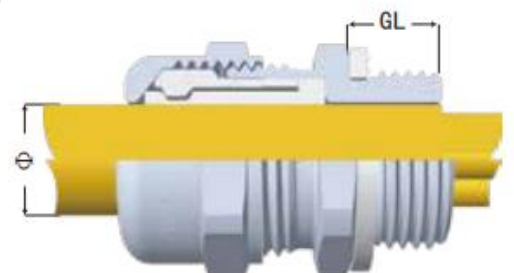

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-08-HT-SS	M12×1.5	12	4~8	9	15/17	50
MG14-08-HT-SS	M14×1.5	14	4~8	9	17/17	50
MG16S-08-HT-SS	M16×1.5	16	4~8	9.5	20/17	50
MG16-10-HT-SS	M16×1.5	16	6~10	9.5	20/21	50
MG18-10-HT-SS	M18×1.5	18	6~10	9.5	21/21	50
MG20S-12-HT-SS	M20×1.5	20	7~12	12	24/24	50
MG20-14-HT-SS	M20×1.5	20	8~14	12	24/26	50
MG22-14-HT-SS	M22×1.5	22	8~14	12	26/26	50
MG24-14-HT-SS	M24×1.5	24	8~14	10.5	28/26	50
MG25-18-HT-SS	M25×1.5	25	13~18	12	30/31	50
MG27-18-HT-SS	M27×1.5 (2)	27	13~18	12	30/31	50
MG30-18-HT-SS	M30×1.5 (2)	30	13~18	12.5	34/31	50
MG32-25-HT-SS	M32×1.5	32	18~25	12.5	38/40	20
MG40-31-HT-SS	M40×1.5	40	25~31	14	48/50	10
MG50-41-HT-SS	M50×1.5	50	33~41	15	58/60	10
MG63-54-HT-SS	M63×1.5	63	46~54	15	71/76	10
PG7-08-HT-SS	PG7	12.5	4~8	9	15/17	50
PG9-08-HT-SS	PG9	15.2	4~8	9	17/17	50
PG11-10-HT-SS	PG11	18.6	6~10	9.5	21/21	50
PG13.5-12-HT-SS	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-14-HT-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG16-14-HT-SS	PG16	22.5	8~14	12	26/26	50
PG21-18-HT-SS	PG21	28.3	13~18	12	32/31	50
PG29-25-HT-SS	PG29	37	18~25	12.5	40/40	20
PG36-31-HT-SS	PG36	47	25~31	15	58/50	10
PG42-41-HT-SS	PG42	54	33~41	15	60/60	10
PG48-54-HT-SS	PG48	59.3	44~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	Φ mm	AG Φ mm	GL mm	nut/cap mm	PCS
G1/4-08-HT-SS	G1/4	13.15	4~8	9	17/17	50
G3/8-10-HT-SS	G3/8	16.66	6~10	9.5	21/21	50
G1/2-12-HT-SS	G1/2	20.99	7~12	12	24/24	50
G1/2-14-HT-SS	G1/2	20.99	8~14	12	24/26	50
G3/4-18-HT-SS	G3/4	26.44	13~18	12	30/31	50
G1-25-HT-SS	G1	33.25	18~25	15	38/40	20
G1-1/4-31-HT-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/2-31-HT-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-41-HT-SS	G1-1/2	47.8	33~41	15	55/60	10
G2-54-HT-SS	G2	59.61	47~54	15	71/76	1
NPT1/4-08-HT-SS	NPT1/4	13.15	4~8	9	17	50
NPT3/8-10-HT-SS	NPT3/8	17.05	6~10	10	21	50
NPT1/2-12-HT-SS	NPT1/2	21.22	7~12	13	26	50
NPT1/2-14-HT-SS	NPT1/2	21.22	8~14	13	26	50
NPT3/4-18-HT-SS	NPT3/4	26.56	13~18	13	31	50
NPT1-25-HT-SS	NPT1	33.23	18~25	15	40	20
NPT1-1/4-31-HT-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/2-31-HT-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-41-HT-SS	NPT1-1/2	48.05	33~41	15	60	10
NPT2-54-HT-SS	NPT2	60.09	44~54	15	76	10

阻燃不锈钢电缆防水接头

Flame retardant stainless steel cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-0

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本产品采用改性阻燃橡胶制成, 具有防火阻燃, 防护等级高, 抗拉力强等特性

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of modified flame-retardant rubber, which has the characteristics of fire resistance, high protection level, and strong tensile strength. The rubber is red and the clamping claws are black

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-08-V0-SS	M12×1.5	12	4~8	9	15/17	50
MG16S-08-V0-SS	M16×1.5	16	4~8	9.5	20/17	50
MG16-10-V0-SS	M16×1.5	16	6~10	9.5	20/21	50
MG18-10-V0-SS	M18×1.5	18	6~10	9.5	21/21	50
MG20S-12-V0-SS	M20×1.5	20	7~12	12	24/24	50
MG20-14-V0-SS	M20×1.5	20	8~14	12	24/26	50
MG20-11-V0-SS	M20×1.5	20	6~11	12	24/26	50
MG22-14-V0-SS	M22×1.5	22	8~14	12	26/26	50
MG22-11-V0-SS	M22×1.5	22	6~11	12	26/26	50
MG24-14-V0-SS	M24×1.5	24	8~14	10.5	28/26	50
MG24-11-V0-SS	M24×1.5	24	6~11	10.5	28/26	50
MG25-18-V0-SS	M25×1.5	25	13~18	12	30/31	50
MG25-16-V0-SS	M25×1.5	25	11~16	12	30/31	50
MG27-18-V0-SS	M27×1.5 (2)	27	13~18	12	30/31	50
MG30-18-V0-SS	M30×1.5 (2)	30	13~18	12.5	34/31	50
MG32-25-V0-SS	M32×1.5	32	18~25	12.5	38/40	20
MG32-22-V0-SS	M32×1.5	32	16~22	12.5	38/40	20
MG40-31-V0-SS	M40×1.5	40	25~31	14	48/50	10
MG50-41-V0-SS	M50×1.5	50	33~41	15	58/60	10
MG63-54-V0-SS	M63×1.5	63	46~54	15	71/76	10
PG7-08-V0-SS	PG7	12.5	4~8	9	15/17	50
PG9-08-V0-SS	PG9	15.2	4~8	9	17/17	50
PG11-10-V0-SS	PG11	18.6	6~10	9.5	21/21	50
PG13.5-12-V0-SS	PG13.5	20.4	7~12	10.5	24/26	50
PG13.5-14-V0-SS	PG13.5	20.4	8~14	10.5	24/26	50
PG16-14-V0-SS	PG16	22.5	8~14	12	26/26	50
PG16-12-V0-SS	PG16	22.5	7~12	12	26/26	50
PG21-18-V0-SS	PG21	28.3	13~18	12	32/31	50
PG21-16-V0-SS	PG21	28.3	11~16	12	32/31	50
PG29-25-V0-SS	PG29	37	18~25	12.5	40/40	20
PG29-22-V0-SS	PG29	37	18~25	12.5	40/40	20
PG36-31-V0-SS	PG36	47	25~31	15	58/50	10
PG42-41-V0-SS	PG42	54	33~41	15	60/60	10
PG48-54-V0-SS	PG48	59.3	44~54	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4-08-V0-SS	G1/4	13.15	4~8	9	17/17	50
G3/8-10-V0-SS	G3/8	16.66	6~10	9.5	21/21	50
G1/2-14-V0-SS	G1/2	20.99	8~14	12	24/26	50
G1/2-11-V0-SS	G1/2	20.99	6~11	12	24/26	50
G1/2-12-V0-SS	G1/2	20.99	7~12	12	24/24	50
G3/4-18-V0-SS	G3/4	26.44	13~18	12	30/31	50
G3/4-16-V0-SS	G3/4	26.44	11~16	12	30/31	50
G1-25-V0-SS	G1	33.25	18~25	15	38/40	20
G1-22-V0-SS	G1	33.25	16~22	15	38/40	20
G1-1/4-31-V0-SS	G1-1/4	41.91	25~31	15	48/50	10
G1-1/2-31-V0-SS	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-41-V0-SS	G1-1/2	47.8	25~31	15	55/60	10
G2-54-V0-SS	G2	59.61	47~54	15	71/76	1
NPT1/4-08-V0-SS	NPT1/4	13.15	4~8	9	17	50
NPT3/8-10-V0-SS	NPT3/8	17.05	6~10	10	21	50
NPT1/2-14-V0-SS	NPT1/2	21.22	8~14	13	26	50
NPT1/2-11-V0-SS	NPT1/2	21.22	6~11	13	26	50
NPT1/2-12-V0-SS	NPT1/2	21.22	7~12	13	26	50
NPT3/4-18-V0-SS	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-V0-SS	NPT3/4	26.56	11~16	13	31	50
NPT1-25-V0-SS	NPT1	33.23	18~25	15	40	20
NPT1-22-V0-SS	NPT1	33.23	16~22	15	40	20
NPT1-1/4-31-V0-SS	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/2-31-V0-SS	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-31-V0-SS	NPT1-1/2	48.05	25~31	15	60	10
NPT2-54-V0-SS	NPT2	60.09	44~54	15	76	10

90度不锈钢电缆防水接头

90 degree stainless steel elbow

产品材料: 304材质, 可选316和316L

螺纹规格: 公制M牙, 英制G(PF)牙, 美制NPT牙

产品特性: 符合CE, IP68, UL94V-2

温度测试: -40°C~105°C, 短时可达120°C


设计特点: 本款产品采用90度弯头一体成型铸造, 使得转角穿线更加便捷, 防护等级高, 抗拉力强

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通等

订购说明: 默认不附螺母, 如需316及316L请另外说明

部分型号需要定制, 具体交期联系客户经理

LAND 蓝江

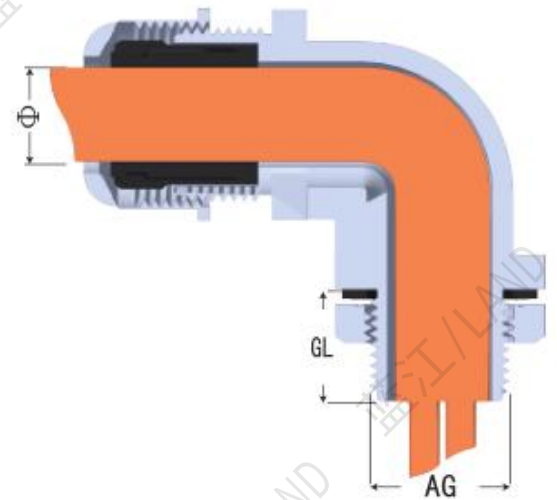

Product materials: SUS304, Optional 316 or 316L

Thread Standard: M thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product adopts a 90 degree elbow integrated molding casting, making corner threading more convenient, with high protection level and strong tensile strength

Application:Electrical, ship, motor, mechanical equipment, rail transit, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify, Some models require customization, please contact the customer manager for specific delivery time

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SW90-M20-14-SS	M20×1.5	20	8~14	12	24/26	50
SW90-M20-12-SS	M20×1.5	20	7~12	12	24/26	50
SW90-M20-09-SS	M20×1.5	20	5~9	12	24/26	50
SW90-M20-06-SS	M20×1.5	20	3~6	12	24/26	50
SW90-M25-18-SS	M25×1.5	25	13~18	12	30/31	50
SW90-M25-16-SS	M25×1.5	25	12~16	12	30/31	50
SW90-M25-14-SS	M25×1.5	25	8~14	12	30/31	50
SW90-M25-10-SS	M25×1.5	25	6~10	12	30/31	50
SW90-M32-25-SS	M32×1.5	32	18~25	12.5	38/40	20
SW90-M32-22-SS	M32×1.5	32	17~22	12.5	38/40	20
SW90-G1/2-14-SS	G1/2	20.99	8~14	12	24/26	50
SW90-G1/2-12-SS	G1/2	20.99	7~12	12	24/26	50
SW90-G1/2-09-SS	G1/2	20.99	5~9	12	24/26	50
SW90-G1/2-06-SS	G1/2	20.99	3~6	12	24/26	50
SW90-G3/4-18-SS	G3/4	26.44	13~18	12	30/31	50
SW90-G3/4-16-SS	G3/4	26.44	12~16	12	30/31	50
SW90-G3/4-14-SS	G3/4	26.44	8~14	12	30/31	50
SW90-G3/4-10-SS	G3/4	26.44	6~10	12	30/31	50
SW90-G1-25-SS	G1	33.25	18~25	15	38/40	20
SW90-G1-22-SS	G1	33.25	17~22	15	38/40	20
SW90-NPT1/2-14-SS	NPT1/2	21.22	8~14	13	26	50
SW90-NPT1/2-12-SS	NPT1/2	21.22	7~12	11	26	50
SW90-NPT1/2-09-SS	NPT1/2	21.22	5~9	11	26	50
SW90-NPT1/2-06-SS	NPT1/2	21.22	3~6	11	26	50
SW90-NPT3/4-18-SS	NPT3/4	26.56	13~18	13	31	50
SW90-NPT3/4-16-SS	NPT3/4	26.56	12~16	13	31	50
SW90-NPT3/4-14-SS	NPT3/4	26.56	8~14	13	31	50
SW90-NPT3/4-10-SS	NPT3/4	26.56	6~10	13	31	50
SW90-NPT1-25-SS	NPT1	33.23	18~25	15	40	20
SW90-NPT1-22-SS	NPT1	33.23	17~22	15	40	20

LBEX系列-喇叭口铠装防爆填料函

LBEX Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品采用喇叭口出线设计, 内部为铠装夹紧装置, 可以采用单密封或双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点。

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

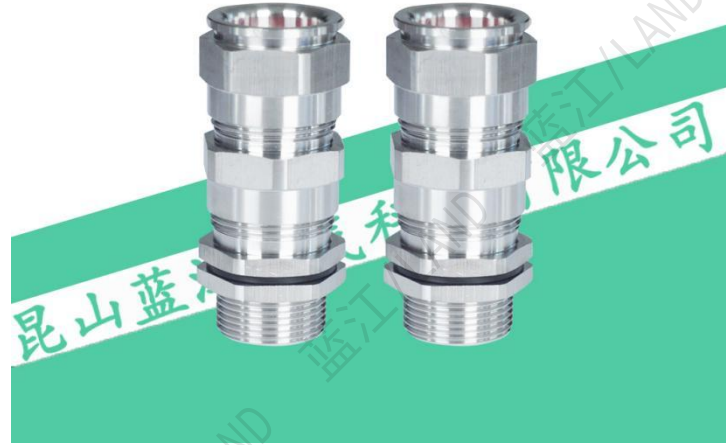

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product adopts a horn mouth outlet design, with an armored clamping device inside. It can adopt a single seal or double seal structure, and has the characteristics of waterproof and explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
LBEX-M20-16-SS	M20×1.5	12~16	6~10	15	20
LBEX-M20-20-SS	M20×1.5	15~20	11~15	15	20
LBEX-M25-20-SS	M25×1.5	15~20	11~15	15	20
LBEX-M25-25-SS	M25×1.5	17~25	11~15	15	20
LBEX-M32-25-SS	M32×1.5	17~25	15~20	15	10
LBEX-M32-25-SS	M32×1.5	23~32	15~20	15	10
LBEX-M40-32-SS	M40×1.5	23~32	18~26	15	10
LBEX-M50-40-SS	M50×1.5	34~40	28~32	15	5
LBEX-M63-50-SS	M63×1.5	44~50	35~45	15	5
LBEX-G1/2-16-SS	G1/2	12~16	6~10	15	20
LBEX-G1/2-20-SS	G1/2	15~20	11~15	15	20
LBEX-G3/4-20-SS	G3/4	15~20	11~15	15	20
LBEX-G3/4-25-SS	G3/4	17~25	11~15	15	20
LBEX-G1-25-SS	G1	17~25	15~20	15	10
LBEX-G1-32-SS	G1	23~32	15~20	15	10
LBEX-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
LBEX-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
LBEX-G2-50-SS	G2	44~50	35~45	15	5
LBEX-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
LBEX-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
LBEX-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
LBEX-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
LBEX-NPT1-25-SS	NPT1	17~25	15~20	15	10
LBEX-NPT1-32-SS	NPT1	23~32	15~20	15	10
LBEX-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
LBEX-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
LBEX-NPT2-50-SS	NPT2	44~50	35~45	15	5

DEX2系列-单密封铠装防爆填料函

DEX2 Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品胶泥型单密封出线设计, 内部为铠装夹紧装置, 采用单密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

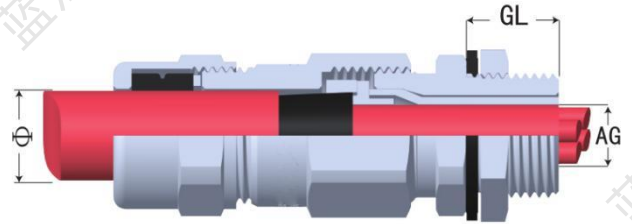

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a single sealed lead out design with adhesive mud type, and an armored clamping device inside. It adopts a single sealed structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
DEX2-M20-16-SS	M20×1.5	12~16	6~10	15	20
DEX2-M20-20-SS	M20×1.5	15~20	11~15	15	20
DEX2-M25-20-SS	M25×1.5	15~20	11~15	15	20
DEX2-M25-25-SS	M25×1.5	17~25	11~15	15	20
DEX2-M32-25-SS	M32×1.5	17~25	15~20	15	10
DEX2-M32-25-SS	M32×1.5	23~32	15~20	15	10
DEX2-M40-32-SS	M40×1.5	23~32	18~26	15	10
DEX2-M50-40-SS	M50×1.5	34~40	28~32	15	5
DEX2-M63-50-SS	M63×1.5	44~50	35~45	15	5
DEX2-G1/2-16-SS	G1/2	12~16	6~10	15	20
DEX2-G1/2-20-SS	G1/2	15~20	11~15	15	20
DEX2-G3/4-20-SS	G3/4	15~20	11~15	15	20
DEX2-G3/4-25-SS	G3/4	17~25	11~15	15	20
DEX2-G1-25-SS	G1	17~25	15~20	15	10
DEX2-G1-32-SS	G1	23~32	15~20	15	10
DEX2-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
DEX2-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
DEX2-G2-50-SS	G2	44~50	35~45	15	5
DEX2-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
DEX2-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
DEX2-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
DEX2-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
DEX2-NPT1-25-SS	NPT1	17~25	15~20	15	10
DEX2-NPT1-32-SS	NPT1	23~32	15~20	15	10
DEX2-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
DEX2-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
DEX2-NPT2-50-SS	NPT2	44~50	35~45	15	5

SKZEX系列-双密封铠装防爆填料函

SKZEX Explosion-proof Armored cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品双密封圈出线锁紧设计, 内部为铠装夹紧装置, 采用双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

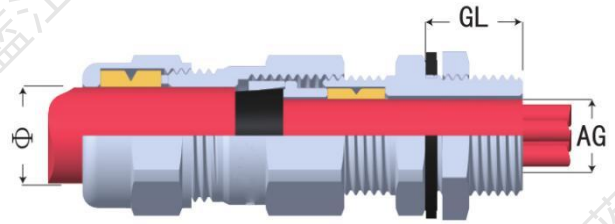

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a dual sealing ring locking design for the outgoing line, with an armored clamping device inside. It adopts a dual sealing structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
SKZEX-M20-16-SS	M20×1.5	12~16	6~10	15	20
SKZEX-M20-20-SS	M20×1.5	15~20	11~15	15	20
SKZEX-M25-20-SS	M25×1.5	15~20	11~15	15	20
SKZEX-M25-25-SS	M25×1.5	17~25	11~15	15	20
SKZEX-M32-25-SS	M32×1.5	17~25	15~20	15	10
SKZEX-M32-25-SS	M32×1.5	23~32	15~20	15	10
SKZEX-M40-32-SS	M40×1.5	23~32	18~26	15	10
SKZEX-M50-40-SS	M50×1.5	34~40	28~32	15	5
SKZEX-M63-50-SS	M63×1.5	44~50	35~45	15	5
SKZEX-G1/2-16-SS	G1/2	12~16	6~10	15	20
SKZEX-G1/2-20-SS	G1/2	15~20	11~15	15	20
SKZEX-G3/4-20-SS	G3/4	15~20	11~15	15	20
SKZEX-G3/4-25-SS	G3/4	17~25	11~15	15	20
SKZEX-G1-25-SS	G1	17~25	15~20	15	10
SKZEX-G1-32-SS	G1	23~32	15~20	15	10
SKZEX-G1-1/4-32-SS	G1-1/4	23~32	18~26	15	10
SKZEX-G1-1/2-40-SS	G1-1/2	34~40	28~32	15	5
SKZEX-G2-50-SS	G2	44~50	35~45	15	5
SKZEX-NPT1/2-16-SS	NPT1/2	12~16	6~10	15	20
SKZEX-NPT1/2-20-SS	NPT1/2	15~20	11~15	15	20
SKZEX-NPT3/4-20-SS	NPT3/4	15~20	11~15	15	20
SKZEX-NPT3/4-25-SS	NPT3/4	17~25	11~15	15	20
SKZEX-NPT1-25-SS	NPT1	17~25	15~20	15	10
SKZEX-NPT1-32-SS	NPT1	23~32	15~20	15	10
SKZEX-NPT1-1/4-32-SS	NPT1-1/4	23~32	18~26	15	10
SKZEX-NPT1-1/2-40-SS	NPT1-1/2	34~40	28~32	15	5
SKZEX-NPT2-50-SS	NPT2	44~50	35~45	15	5

JGKEX系列-接管式铠装防爆填料函

JGEX Explosion-proof Armored cable gland

产品材料: 304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX


温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品内外丝接管式设计, 内部为铠装夹
紧装置, 可采用单密封或双密封结构, 具有防水防爆,
防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备等

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江

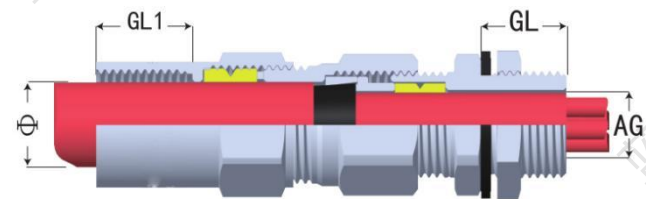

Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features an inner and outer wire connection design, with an armored clamping device inside. It can adopt a single seal or double seal structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格		电缆范围/Cable range		螺纹长度	包装
	外螺纹	内螺纹	带铠电缆	内部电缆		
Product model	External thread	internal thread	Armored cable	Internal cable	Thread L	packaging
PN.			Φ mm	AG mm	GL mm	PCS
JGKEX-M20-16-SS	M20×1.5	M20×1.5	12~16	6~10	15	20
JGKEX-M25-20-SS	M25×1.5	M25×1.5	15~20	11~15	15	20
JGKEX-M32-25-SS	M32×1.5	M32×1.5	17~25	15~20	15	10
JGKEX-M40-32-SS	M40×1.5	M40×1.5	23~32	18~26	15	10
JGKEX-M50-40-SS	M50×1.5	M50×1.5	34~40	28~32	15	5
JGKEX-M63-50-SS	M63×1.5	M63×1.5	44~50	35~45	15	5
JGKEX-G1/2-16-SS	G1/2	G1/2	12~16	6~10	15	20
JGKEX-G3/4-20-SS	G3/4	G3/4	15~20	11~15	15	20
JGKEX-G1-25-SS	G1	G1	17~25	15~20	15	10
JGKEX-G1-1/4-32-SS	G1-1/4	G1-1/4	23~32	18~26	15	10
JGKEX-G1-1/2-40-SS	G1-1/2	G1-1/2	34~40	28~32	15	5
JGKEX-G2-50-SS	G2	G2	44~50	35~45	15	5
JGKEX-NPT1/2-16-SS	NPT1/2	NPT1/2	12~16	6~10	15	20
JGKEX-NPT3/4-20-SS	NPT3/4	NPT3/4	15~20	11~15	15	20
JGKEX-NPT1-25-SS	NPT1	NPT1	17~25	15~20	15	10
JGKEX-NPT1-1/4-32-SS	NPT1-1/4	NPT1-1/4	23~32	18~26	15	10
JGKEX-NPT1-1/2-40-SS	NPT1-1/2	NPT1-1/2	34~40	28~32	15	5
JGKEX-NPT2-50-SS	NPT2	NPT2	44~50	35~45	15	5

EXd1系列-隔爆不锈钢填料函

EXd1 Explosion-proof cable gland

产品材料: 默认304材质, 可选316和316L

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品本体与密封圈加长设计, 符合隔爆标准, 密封圈为硅胶, 本体为不锈钢, 安装便捷

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 如需316及316L请另外说明

LAND 蓝江



Product materials: SUS304, Optional 316 or 316L

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68, UL94V-2

Temperature test: -40 ° C to 05 ° C, short-term up to 120 ° C

Design Features: This product has an extended design for the body and sealing ring, which meets explosion-proof standards. The sealing ring is made of silicone and the body is made of stainless steel

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
Exd1-M20-14-SS	M20×1.5	20	8~14	15	26	20
Exd1-M25-16-SS	M25×1.5	25	8~16	15	30	20
Exd1-M25-20-SS	M25×1.5	25	10~20	15	38	20
Exd1-M32-20-SS	M32×1.5	32	10~20	18	38	10
Exd1-M32-25-SS	M32×1.5	32	10~25	18	46	10
Exd1-M40-25-SS	M40×1.5	40	10~25	18	46	5
Exd1-M40-32-SS	M40×1.5	40	14~32	18	50	5
Exd1-M50-32-SS	M50×1.5	50	14~32	18	50	5
Exd1-M50-41-SS	M50×1.5	50	17~41	18	62	5
Exd1-M63-41-SS	M63×1.5	63	17~41	18	62	1
Exd1-G1/2-14-SS	G1/2	20.95	8~14	15	26	20
Exd1-G3/4-16-SS	G3/4	26.44	8~16	15	30	20
Exd1-G3/4-20-SS	G3/4	26.44	10~20	15	38	20
Exd1-G1-20-SS	G1	33.2	10~20	18	38	10
Exd1-G1-25-SS	G1	33.1	10~25	18	46	10
Exd1-G1-1/4-25-SS	G1-1/4	41.9	10~25	18	46	5
Exd1-G1-1/4-32-SS	G1-1/4	41.9	14~32	18	50	5
Exd1-G1-1/2-32-SS	G1-1/2	47.8	14~32	18	50	5
Exd1-G1-1/2-41-SS	G1-1/2	47.8	17~41	18	62	5
Exd1-G2-41-SS	G2	59.6	17~41	18	62	1
Exd1-NPT1/2-14-SS	NPT1/2	20.95	8~14	15	26	20
Exd1-NPT3/4-16-SS	NPT3/4	26.44	8~16	15	30	20
Exd1-NPT3/4-20-SS	NPT3/4	26.44	10~20	15	38	20
Exd1-NPT1-20-SS	NPT1	33.5	10~20	18	38	10
Exd1-NPT1-25-SS	NPT1	33.5	10~25	18	46	10
Exd1-NPT1-1/4-25-SS	NPT1-1/4	42	10~25	18	46	5
Exd1-NPT1-1/4-32-SS	NPT1-1/4	42	14~32	18	50	5
Exd1-NPT1-1/2-32-SS	NPT1-1/2	48	14~32	18	50	5
Exd1-NPT1-1/2-41-SS	NPT1-1/2	48	17~41	18	62	5
Exd1-NPT2-41-SS	NPT2	60	17~41	18	62	1

EXd2系列-耐温防水不锈钢填料函

EXd2 High temperature waterproof cable gland

产品材料：默认304材质，可选316和316L




产品特性：符合CE，IP68

温度测试：-20℃~180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，内压迫紧密封锁紧电缆

订购说明：默认不附螺母，如需316及316L请另外说明

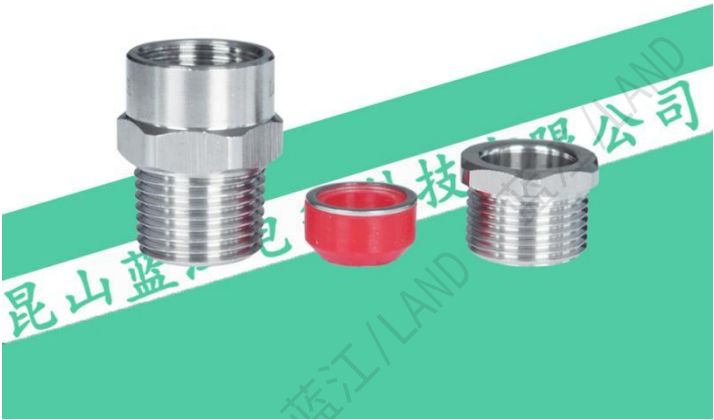

Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: Cone shaped silicone sealing ring design, internal compression tightly seals and locks the cable

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
Exd2-M20-14-SS	M20×1.5	20	8~14	15	30	50
Exd2-M20-12-SS	M20×1.5	20	7~12	15	26	50
Exd2-M20-08-SS	M20×1.5	20	4~8	15	26	50
Exd2-M20-06-SS	M20×1.5	20	3~6	15	26	50
Exd2-G1/2-14-SS	G1/2	20.95	8~14	15	30	50
Exd2-G1/2-12-SS	G1/2	20.95	7~12	15	30	50
Exd2-G1/2-08-SS	G1/2	20.95	4~8	15	26	50
Exd2-G1/2-06-SS	G1/2	20.95	3~6	15	26	50
Exd2-NPT1/2-14-SS	NPT1/2	20.95	8~14	15	30	50
Exd2-NPT1/2-12-SS	NPT1/2	20.95	7~12	15	26	50
Exd2-NPT1/2-08-SS	NPT1/2	20.95	4~8	15	26	50
Exd2-NPT1/2-06-SS	NPT1/2	20.95	3~6	15	26	50

TJ不锈钢船用夹紧填料函

TJ stainless steel marine stuffing box


产品材料：默认304材质，可选316和316L

产品特性：符合CE，IP65

温度测试：-40℃~105℃，短时可达120℃

设计特点：压紧式密封设计，不锈钢船用填料函

订购说明：默认不附螺母，如需316及316L请另外说明

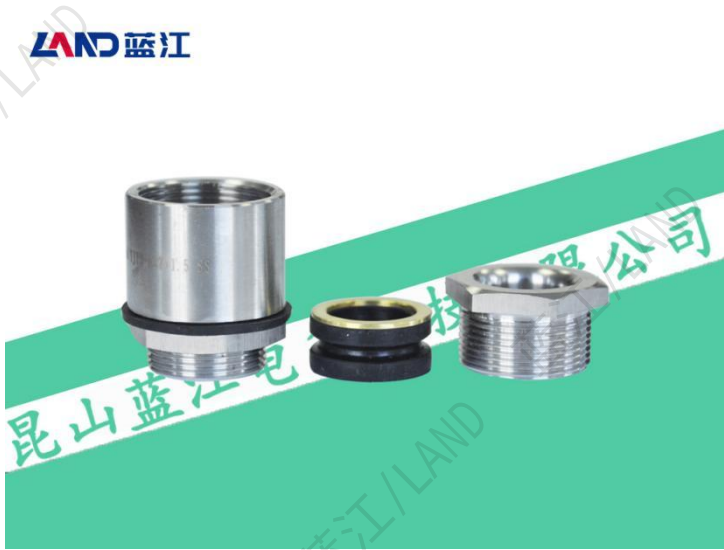

Product materials: SUS304, Optional 316 or 316L

Product Features: Compliant with CE, IP68

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: Compression sealing design, stainless steel marine stuffing box

Ordering Tips: Default does not come with nuts. If you need 316 and 316L, please specify

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
TJ08-M14-SS	M14×1.0	14	5~7	10	18/18	50
TJ13-M18-SS	M18×1.0	18	9~12	11	24/24	50
TJ16-M22-SS	M22×1.0	22	11~15	12	27/28	20
TJ19-M27-SS	M27×1.5	27	14~18	14	32/32	20
TJ24-M30-SS	M30×1.5	30	18~23	14	38/38	20
TJ28-M36-SS	M36×2.0	36	23~27	14	45/45	10
TJ34-M42-SS	M42×2.0	42	27~33	14	50/50	10
TJ42-M52-SS	M52×2.0	52	33~41	14	62/60	5
TJ50-M58-SS	M58×2.0	58	33~49	20	65/70	5
TJ58-M68-SS	M68×2.0	68	33~57	20	85/80	1

Ex系列-防爆铜镀镍防水接头

Explosion proof Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

防爆标准：Ex eb IIC Gb/Ex tb IIIC Db

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配扁型防水密封垫片

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with flat washers



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

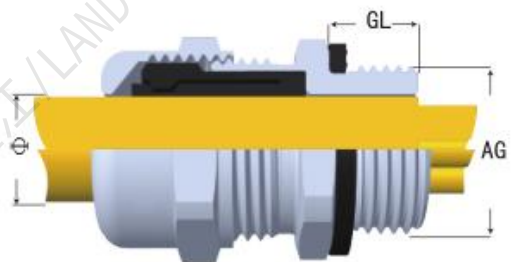

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG12A-08	M12×1.5	12	4~8	8	17/17	50
MG12A-05	M12×1.5	12	3~5	8	17/17	50
MG16AS-08	M16×1.5	16	4~8	8	18/18	50
MG16AS-05	M16×1.5	16	3~5	8	18/18	50
MG16A-10	M16×1.5	16	6~10	9	22/22	50
MG16A-07	M16×1.5	16	4~7	9	22/22	50
MG16A-05	M16×1.5	16	3~5	9	22/22	50
MG16A-04	M16×1.5	16	2~4	9	22/22	50
MG18A-14	M18×1.5	18	8~14	9.5	26/26	50
MG18A-10	M18×1.5	18	6~10	9	22/22	50
MG18A-07	M18×1.5	18	4~7	9	22/22	50
MG20AS-12	M20×1.5	20	7~12	10	24/24	50
MG20AS-11	M20×1.5	20	6~11	10	24/24	50
MG20AS-09	M20×1.5	20	5~9	10	24/24	50
MG20A-14	M20×1.5	20	8~14	10	26/26	50
MG20A-12	M20×1.5	20	6~11	10	26/26	50
MG20A-09	M20×1.5	20	5~9	10	26/26	50
MG20A-06	M20×1.5	20	3~6.5	10	26/26	50
MG25A-18	M25×1.5	25	13~18	12	32/32	50
MG25A-16	M25×1.5	25	11~16	12	32/32	50
MG25A-14	M25×1.5	25	8~14	12	32/32	50
MG25A-10	M25×1.5	25	6~10	12	32/32	50
MG25A-08	M25×1.5	25	4~8	12	32/32	50
MG25A-06	M25×1.5	25	3~6	12	32/32	50
MG32A-25	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30	M40×1.5	40	24~30	15	50/50	10
MG40A-25	M40×1.5	40	18~25	15	50/50	10
MG50A-40	M50×1.5	50	33~40	15	59/59	10
MG50A-33	M50×1.5	50	25~33	15	59/59	10
MG63A-51	M63×1.5	63	46~51	15	73/73	10
MG63A-46	M63×1.5	63	40~46	15	73/73	10
MG63A-35	M63×1.5	63	28~35	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
PG7A-08	PG7	12.5	4~8	8	17/17	50
PG7A-05	PG7	12.5	3~5	8	17/17	50
PG9A-08	PG9	15.2	4~8	8	18/18	50
PG9A-05	PG9	15.2	3~5	8	18/18	50
PG11A-10	PG11	18.6	6~10	9	22/22	50
PG11A-07	PG11	18.6	4~7	9	22/22	50
PG11A-05	PG11	18.6	3~5	9	22/22	50
PG11A-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-12	PG13.5	20.4	7~12	9.5	24/24	50
PG13.5A-11	PG13.5	20.4	6.5~10.5	9.5	24/24	50
PG13.5A-09	PG13.5	20.4	5~9	9.5	24/24	50
PG16A-14	PG16	22.5	8~14	10	26/26	50
PG16A-12	PG16	22.5	6~12	10	26/26	50
PG16A-06	PG16	22.5	3~6.5	10	26/26	50
PG21A-18	PG21	28.3	13~18	12	32/32	50
PG21A-16	PG21	28.3	11~16	12	32/32	50
PG21A-14	PG21	28.3	8~14	12	32/32	50
PG21A-10	PG21	28.3	6~10	12	32/32	50
PG21A-09	PG21	28.3	6~9	12	32/32	50
PG21A-08	PG21	28.3	4~8	12	32/32	50
PG21A-06	PG21	28.3	3~6.5	12	32/32	50
PG29A-25	PG29	37	18~25	12.5	40/40	20
PG29A-22	PG29	37	16~22	12.5	40/40	20
PG36A-30	PG36	47	24~30	15	50/50	10
PG36A-25	PG36	47	18~25	15	50/50	10
PG42A-40	PG42	54	33~40	15	59/59	10
PG42A-33	PG42	54	25~33	15	59/59	10
PG48A-51	PG48	59.3	44~51	15	73/73	10
PG48A-46	PG48	59.3	39~46	15	73/73	10
PG48A-35	PG48	59.3	28~35	15	73/73	10

产品参数表/G

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
G1/4A-08	G1/4	13.15	4~8	8	17/17	50
G1/4A-05	G1/4	13.15	3~5	8	17/17	50
G3/8A-10	G3/8	16.66	6~10	9	22/22	50
G3/8A-07	G3/8	16.66	4~7	9	22/22	50
G3/8A-05	G3/8	16.66	3~5	9	22/22	50
G3/8A-04	G3/8	16.66	2~4	9	22/22	50
G1/2A-12	G1/2	20.95	7~12	9.5	24/24	50
G1/2A-11	G1/2	20.95	6~10.5	9.5	24/24	50
G1/2A-09	G1/2	20.95	5~9	9.5	24/24	50
G1/2A-14	G1/2	20.95	8~14	10	26/26	50
G1/2A-06	G1/2	20.95	3~6	10	26/26	50
G3/4A-18	G3/4	26.66	13~18	12	32/32	50
G3/4A-16	G3/4	26.66	11~16	12	32/32	50
G3/4A-14	G3/4	26.66	8~14	12	32/32	50
G3/4A-10	G3/4	26.66	6~10	12	32/32	50
G3/4A-09	G3/4	26.66	6~9	12	32/32	50
G3/4A-08	G3/4	26.66	4~8	12	32/32	50
G3/4A-06	G3/4	26.66	3~6.5	12	32/32	50
G1A-25	G1	33.2	18~25	12.5	40/40	20
G1A-22	G1	33.2	16~22	12.5	40/40	20
G1-1/4A-30	G1-1/4	41.9	24~30	15	50/50	10
G1-1/4A-25	G1-1/4	41.9	18~25	15	50/50	10
G1-1/2A-40	G1-1/2	47.8	33~40	15	59/59	10
G1-1/2A-33	G1-1/2	47.8	25~33	15	59/59	10
G2A-51	G2	59.6	44~51	15	68/68	10
G2A-46	G2	59.6	39~46	15	68/68	10
G2A-35	G2	59.6	28~35	15	68/68	10

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
NPT1/4A-08	NPT1/4	13.15	4~8	8	17	50
NPT1/4A-05	NPT1/4	13.15	3~5	8	17	50
NPT3/8A-10	NPT3/8	16.66	6~10	9	22	50
NPT3/8A-07	NPT3/8	16.66	4~7	9	22	50
NPT3/8A-05	NPT3/8	16.66	3~5	9	22	50
NPT3/8A-04	NPT3/8	16.66	2~4	9	22	50
NPT1/2A-12	NPT1/2	20.95	7~12	9.5	24	50
NPT1/2A-11	NPT1/2	20.95	6~10.5	9.5	24	50
NPT1/2A-09	NPT1/2	20.95	5~9	9.5	24	50
NPT1/2A-14	NPT1/2	20.95	8~14	10	26	50
NPT1/2A-06	NPT1/2	20.95	3~6	10	26	50
NPT3/4A-18	NPT3/4	26.66	13~18	12	32	50
NPT3/4A-16	NPT3/4	26.66	11~16	12	32	50
NPT3/4A-14	NPT3/4	26.66	8~14	12	32	50
NPT3/4A-10	NPT3/4	26.66	6~10	12	32	50
NPT3/4A-09	NPT3/4	26.66	6~9	12	32	50
NPT3/4A-08	NPT3/4	26.66	4~8	12	32	50
NPT3/4A-06	NPT3/4	26.66	3~6.5	12	32	50
NPT1A-25	NPT1	33.2	18~25	12.5	40	20
NPT1A-22	NPT1	33.2	16~22	12.5	40	20
NPT1-1/4A-30	NPT1-1/4	41.9	24~30	15	50	10
NPT1-1/4A-25	NPT1-1/4	41.9	18~25	15	50	10
NPT1-1/2A-40	NPT1-1/2	47.8	33~40	15	59	10
NPT1-1/2A-33	NPT1-1/2	47.8	25~33	15	59	10
NPT2A-51	NPT2	59.6	44~51	15	68	10
NPT2A-46	NPT2	59.6	39~46	15	68	10
NPT2A-35	NPT2	59.6	28~35	15	68	10

直通铜镀镍电缆防水接头

Straight through brass nickel plated cable gland

产品材料：黄铜镀镍



螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40°C~105°C，短时可达120°C

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封



Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG4B-02	M4×0.7	4	1.5~2	2.5	5/5	100
MG5B-03	M5×0.8	5	2.5~3	3	6/6	100
MG6B-03	M6×1.0	6	2.5~3	4	8/8	100
MG8B-04	M8×1.25	8	3~4	6	11/11	100
MG8B-05	M8×1.0	8	4~5.2	6	14/14	100
MG10B-06	M10×1.0	10	3~6.5	6	14/14	100
MG12B-06	M12×1.5	12	3~6.5	6	14/14	100
MG12B-08	M12×1.5	12	4~8	6	14/16	100
MG14B-06	M14×1.5	14	3~6.5	6	14/16	100
MG14B-08	M14×1.5	14	4~8	7	17/17	100
MG16B-08	M16×1.5	16	4~8	7	17/18	100
MG16B-10	M16×1.5	16	5~10	7	20/20	100
MG18B-10	M18×1.5	18	5~10	7	20/20	100
MG20B-10	M20×1.5	20	5~10	8	20/22	100
MG20B-12	M20×1.5	20	6~12	8	22/22	100
MG20B-14	M20×1.5	20	8~14	8	24/24	100
MG22B-12	M22×1.5	22	6~12	8	24/22	100
MG22B-14	M22×1.5	22	8~14	8	24/24	100
MG24B-14	M24×1.5	24	8~14	8	24/27	100
MG25B-14	M25×1.5	25	8~14	8	24/27	50
MG25B-16	M25×1.5	25	10~16	8	27/27	50
MG25B-18	M25×1.5	25	13~18	8	30/30	50
MG27B-16	M27×1.5(2)	27	11~16	8	30/27	50
MG27B-18	M27×1.5(2)	27	13~18	8	30/30	50
MG30B-16	M30×1.5(2)	30	11~16	8	30/27	50
MG30B-18	M30×1.5(2)	30	13~18	8	30/32	50
MG30B-20	M30×1.5(2)	30	15~20	8	30/32	50
MG32B-18	M32×1.5(2)	32	13~18	9	34	50
MG32B-22	M32×1.5(2)	32	15~22	9	34/34	50
MG32B-25	M32×1.5(2)	32	18~25	9	40/40	50
MG33B-22	M33×1.5(2)	33	15~22	9	34/36	50
MG36B-22	M36×1.5(2)	36	16~22	9	40/34	50
MG36B-25	M36×1.5(2)	36	18~25	9	40/40	50
MG40B-25	M40×1.5(2)	40	18~25	9	40/43	20
MG40B-28	M40×1.5(2)	40	20~28	10	43/43	20
MG40B-30	M40×1.5(2)	40	22~30	10	45/45	20
MG40B-32	M40×1.5(2)	40	24~32	10	50/50	20
MG42B-28	M42×1.5(2)	42	20~28	10	43/45	20
MG42B-30	M42×1.5(2)	42	22~30	10	45/50	20

MG48B-32	M48×1.5(2)	48	24~32	10	50/52	20
MG50B-32	M50×1.5(2)	50	24~32	10	57/55	20
MG50B-38	M50×1.5(2)	50	30~38	10	58/55	20
MG54B-38	M54×1.5(2)	54	30~38	12	57/55	20
MG56B-38	M56×1.5(2)	56	30~38	12	57/55	20
MG60B-44	M60×1.5(2)	60	37~44	12	64/64	10
MG63B-44	M63×1.5(2)	63	37~44	12	64/68	10
MG63B-53	M63×1.5(2)	63	43~53	15	78/76	10
MG64B-44	M64×1.5(2)	64	37~44	12	64/68	10
MG72B-52	M72×1.5(2)	72	43~53	15	73/78	1
MG75B-52	M75×1.5(2)	75	43~53	15	76/81	1
MG76B-52	M76×1.5(2)	76	43~53	15	76/81	1
MG80B-62	M80×1.5(2)	80	52~62	16	86/87	1
MG85B-62	M85×1.5(2)	85	52~62	16	92	1
MG85B-70	M85×1.5(2)	85	60~70	18	98	1
MG88B-70	M88×1.5(2)	88	60~70	17	98	1
MG90B-70	M90×1.5(2)	90	60~70	17	98	1
MG100B-80	M100×1.5(2)	100	70~80	22	110	1

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	φ mm	φ mm	GL mm	S1/S2 mm	PCS
PG7B-06	PG7	12.5	3~6.5	6	14/14	100
PG9B-08	PG9	15.2	4~8	7	17/17	100
PG9B-10	PG9	15.2	5~10	7	20/20	100
PG11B-10	PG11	18.6	5~10	7	20/20	100
PG13.5B-08	PG13.5	20.4	4~8	7	17/22	100
PG13.5B-10	PG13.5	20.4	5~10	7	20/22	100
PG13.5B-12	PG13.5	20.4	6~12	7	22/22	100
PG13.5B-14	PG13.5	20.4	8~14	7	24/24	100
PG16B-12	PG16	22.5	6~12	8	22/24	100
PG16B-14	PG16	22.5	8~14	8	24/24	100
PG19B-14	PG19	23.8	8~14	8	24/27	100
PG21B-16	PG21	28.3	10~16	8	27/30	50
PG21B-18	PG21	28.3	13~18	8	30/30	50
PG25B-18	PG25	30	13~18	8	30/32	50
PG29B-25	PG29	37	18~25	9	40/40	50
PG36B-25	PG36	47	18~25	10	40/50	20
PG36B-32	PG36	47	24~32	10	50/50	20
PG42B-38	PG42	54	30~38	10	58/58	10
PG48B-44	PG48	59.3	37~44	12	64/64	10
PG63B-52	PG63	71	42~52	15	76	10

产品参数表/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread	Wrench Size	packaging
PN.	G	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
G1/4B-06	G1/4	13.15	3~6.5	6	14/16	100
G3/8B-08	G3/8	16.65	4~8	7	17/18	100
G1/2B-10	G1/2	20.95	5~10	8	20/22	100
G1/2B-12	G1/2	20.95	6~12	8	22/22	100
G1/2B-14	G1/2	20.95	8~14	8	24/24	100
G3/4B-14	G3/4	26.44	8~14	8	30/30	100
G3/4B-16	G3/4	26.44	11~16	8	30/30	100
G3/4B-18	G3/4	26.44	13~18	8	30/30	100
G1B-22	G1	33.24	16~22	9	34/36	50
G1B-25	G1	33.24	18~25	9	40/40	50
G1-1/4B-28	G1-1/4	41.91	22~28	10	43/45	20
G1-1/4B-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2B-32	G1-1/2	47.80	25~32	10	50/52	20
G2B-44	G2	59.61	37~44	12	64/64	10
G2-1/2B-52	G2-1/2	76	42~52	15	76/81	10
G3B-70	G3	90	65~70	18	98/98	10

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	NPT	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
NPT1/4B-06	NPT1/4	13.15	3~6.5	6	14/16	100
NPT3/8B-08	NPT3/8	16.65	4~8	7	17/18	100
NPT1/2B-10	NPT1/2	20.95	5~10	8	20/22	100
NPT1/2B-12	NPT1/2	20.95	6~12	8	22/22	100
NPT1/2B-14	NPT1/2	20.95	8~14	8	24/24	100
NPT3/4B-14	NPT3/4	26.44	8~14	8	30/30	100
NPT3/4B-16	NPT3/4	26.44	11~16	8	30/30	100
NPT3/4B-18	NPT3/4	26.44	13~18	8	30/30	100
NPT1B-22	NPT1	33.24	16~22	9	34/36	50
NPT1B-25	NPT1	33.24	18~25	9	40/40	50
NPT1-1/4B-28	NPT1-1/4	41.91	22~28	10	43/45	20
NPT1-1/4B-30	NPT1-1/4	41.91	23~30	10	45/45	20
NPT1-1/2B-32	NPT1-1/2	47.80	25~32	10	50/52	20
NPT2B-44	NPT2	59.61	37~44	12	64/64	10
NPT2-1/2B-52	NPT2-1/2	76	42~52	15	76/81	10
NPT3B-70	NPT3	90	65~70	18	98/98	10

直通扁孔耐高温金属接头

Straight Flat Hole High Temperature cable gland

产品材料：黄铜镀镍

LAND 蓝江

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-20°C~180°C，短时可达200°C

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封



Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -20 ° C to 180 ° C, short-term 200 ° C

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings



产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	扁孔尺寸	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG20B-0612	M20×1.5	20	6*12	8	24/24	100
MG22B-0612	M22×1.5	22	6*12	8	24/24	100
MG24B-0612	M24×1.5	24	6*12	8	24/27	100
MG25B-0612	M25×1.5	25	6*12	8	24/27	50
MG25B-0614	M25×1.5	25	6*14	8	30/30	50
MG27B-0614	M27×1.5 (2)	27	6*14	8	30/30	50
MG30B-0614	M30×1.5 (2)	30	6*14	8	30/32	50
MG32B-0614	M32×1.5 (2)	32	6*14	9	34	50
MG32B-0519	M32×1.5 (2)	32	5*19	9	40/40	50
MG36B-0519	M36×1.5 (2)	36	5*19	9	40/40	50
MG40B-0519	M40×1.5 (2)	40	5*19	9	40/43	20
MG40B-1230	M40×1.5 (2)	40	12*30	10	50/50	20
MG48B-1230	M48×1.5 (2)	48	12*30	10	50/52	20
MG50B-1230	M50×1.5 (2)	50	12*30	10	57/55	20
MG50B-1334	M50×1.5 (2)	50	13*34	10	58/55	20
MG63B-1641	M63×1.5 (2)	63	16*41	12	64/68	10
PG16B-0612	PG16	22.5	6*12	8	24/24	100
PG21B-0614	PG21	28.3	6*14	8	30/30	50
PG29B-0519	PG29	37	5*19	9	40/40	50
PG36B-1230	PG36	47	12*30	10	50/50	20
PG42B-1334	PG42	54	13*34	10	58/58	10
PG48B-1641	PG48	59.3	16*41	12	64/64	10
G1/2B-0612	G1/2	20.95	6*12	8	24/24	100
G3/4B-0614	G3/4	26.44	6*14	8	30/30	100
G1B-0519	G1	33.24	5*19	9	40/40	50
G1-1/4B-1230	G1-1/4	41.91	12*30	10	45/52	20
G1-1/2B-1230	G1-1/2	47.8	12*30	10	50/52	20
G1-1/2B-1334	G1-1/2	47.8	13*34	10	50/58	20
G2B-1641	G2	59.61	16*41	12	64/64	10
NPT1/2B-0612	NPT1/2	20.95	6*12	8	24/24	100
NPT3/4B-0614	NPT3/4	26.44	6*14	8	30/30	100
NPT1B-0519	NPT1	33.24	5*19	9	40/40	50
NPT1-1/4B-1230	NPT1-1/4	41.91	12*30	10	45/52	20
NPT1-1/2B-1230	NPT1-1/2	47.8	12*30	10	50/52	20
NPT1-1/2B-1334	NPT1-1/2	47.8	13*34	10	50/58	20
NPT2B-1641	NPT2	59.61	16*41	12	64/64	10

直通多孔耐高温金属接头

Straight Multi Hole High Temperature cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-20°C~180°C，短时可达200°C

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -20 ° C to 180 ° C, short-term 200 ° C

Application: Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings



蓝江产品型号	螺纹规格	建议开孔	扁孔尺寸	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG20B-H2-06	M20 $\times$ 1.5	20	4~6	8	24/24	100
MG20B-H3-05	M20 $\times$ 1.5	20	3~5	8	24/24	100
MG20B-H4-04	M20 $\times$ 1.5	20	2~4	8	24/24	100
MG20B-H5-03	M20 $\times$ 1.5	20	1~3	8	24/24	100
MG20B-H6-03	M20 $\times$ 1.5	20	1~3	8	24/24	100
MG22B-H2-06	M22 $\times$ 1.5	22	4~6	8	24/24	100
MG22B-H3-05	M22 $\times$ 1.5	22	3~5	8	24/24	100
MG22B-H4-04	M22 $\times$ 1.5	22	2~4	8	24/24	100
MG22B-H5-03	M22 $\times$ 1.5	22	1~3	8	24/24	100
MG22B-H6-03	M22 $\times$ 1.5	22	1~3	8	24/24	100
MG24B-H2-06	M24 $\times$ 1.5	24	4~6	8	24/27	100
MG24B-H3-05	M24 $\times$ 1.5	24	3~5	8	24/27	100
MG24B-H4-04	M24 $\times$ 1.5	24	2~4	8	24/27	100
MG24B-H5-03	M24 $\times$ 1.5	24	1~3	8	24/27	100
MG24B-H6-03	M24 $\times$ 1.5	24	1~3	8	24/27	100
MG25B-H2-08	M25 $\times$ 1.5	25	6~8	8	30/30	50
MG25B-H3-07	M25 $\times$ 1.5	25	5~7	8	30/30	50
MG25B-H4-06	M25 $\times$ 1.5	25	4~6	8	30/30	50
MG25B-H5-05	M25 $\times$ 1.5	25	3~5	8	30/30	50
MG25B-H6-05	M25 $\times$ 1.5	25	3~5	8	30/30	50
MG27B-H2-08	M27 $\times$ 1.5 (2)	27	6~8	8	30/30	50
MG27B-H3-07	M27 $\times$ 1.5 (2)	27	5~7	8	30/30	50
MG27B-H4-06	M27 $\times$ 1.5 (2)	27	4~6	8	30/30	50
MG27B-H5-05	M27 $\times$ 1.5 (2)	27	3~5	8	30/30	50
MG27B-H6-05	M27 $\times$ 1.5 (2)	27	3~5	8	30/30	50
MG30B-H2-08	M30 $\times$ 1.5 (2)	30	6~8	8	30/32	50
MG30B-H3-07	M30 $\times$ 1.5 (2)	30	5~7	8	30/32	50
MG30B-H4-06	M30 $\times$ 1.5 (2)	30	4~6	8	30/32	50
MG30B-H5-05	M30 $\times$ 1.5 (2)	30	3~5	8	30/32	50
MG30B-H6-05	M30 $\times$ 1.5 (2)	30	3~5	8	30/32	50
MG32B-H2-10	M32 $\times$ 1.5 (2)	32	8~10	9	40/40	50
MG32B-H3-10	M32 $\times$ 1.5 (2)	32	8~10	9	40/40	50
MG32B-H4-09	M32 $\times$ 1.5 (2)	32	7~9	9	40/40	50
MG32B-H5-08	M32 $\times$ 1.5 (2)	32	6~8	9	40/40	50
MG32B-H6-07	M32 $\times$ 1.5 (2)	32	5~7	9	40/40	50

蓝江产品型号	螺纹规格	建议开孔	扁孔尺寸	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG36B-H2-10	M36 $\times$ 1.5(2)	36	8~10	9	40/40	50
MG36B-H3-10	M36 $\times$ 1.5(2)	36	8~10	9	40/40	50
MG36B-H4-09	M36 $\times$ 1.5(2)	36	7~9	9	40/40	50
MG36B-H5-08	M36 $\times$ 1.5(2)	36	6~8	9	40/40	50
MG36B-H6-07	M36 $\times$ 1.5(2)	36	5~7	9	40/40	50
MG40B-H2-13	M40 $\times$ 1.5(2)	40	11~13	10	50/50	20
MG40B-H3-12	M40 $\times$ 1.5(2)	40	10~12	10	50/50	20
MG40B-H4-11	M40 $\times$ 1.5(2)	40	9~11	10	50/50	20
MG40B-H5-10	M40 $\times$ 1.5(2)	40	8~10	10	50/50	20
MG40B-H6-08	M40 $\times$ 1.5(2)	40	6~8	10	50/50	20
MG48B-H2-13	M48 $\times$ 1.5(2)	48	11~13	10	50/52	20
MG48B-H3-12	M48 $\times$ 1.5(2)	48	10~12	10	50/52	20
MG48B-H4-11	M48 $\times$ 1.5(2)	48	9~11	10	50/52	20
MG48B-H5-10	M48 $\times$ 1.5(2)	48	8~10	10	50/52	20
MG48B-H6-08	M48 $\times$ 1.5(2)	48	6~8	10	50/52	20
MG50B-H2-15	M50 $\times$ 1.5(2)	50	12~15	10	58/55	20
MG50B-H3-13	M50 $\times$ 1.5(2)	50	10~13	10	58/55	20
MG50B-H4-12	M50 $\times$ 1.5(2)	50	9~12	10	58/55	20
MG50B-H5-11	M50 $\times$ 1.5(2)	50	8~11	10	58/55	20
MG50B-H6-10	M50 $\times$ 1.5(2)	50	7~10	10	58/55	20
MG63B-H2-15	M63 $\times$ 1.5(2)	63	12~15	12	64/68	10
MG63B-H3-14	M63 $\times$ 1.5(2)	63	11~14	12	64/68	10
MG63B-H4-13	M63 $\times$ 1.5(2)	63	10~13	12	64/68	10
MG63B-H5-12	M63 $\times$ 1.5(2)	63	9~12	12	64/68	10
MG63B-H6-10	M63 $\times$ 1.5(2)	63	7~10	12	64/68	10

T系列-半通铜镀镍电缆防水接头

T Series - Straight through brass nickel plated cable gland

产品材料：黄铜镀镍



螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

应用场景：电气，船舶，电机，照明，机械

订购说明：默认不附螺母，配O型圈防水密封



Product materials: Nickel Plated Brass



Thread Standard: M thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Application:Electrical, marine, motor, lighting, machinery, transportation, robotics, etc

Ordering Tips: Without nuts, equipped with O-rings

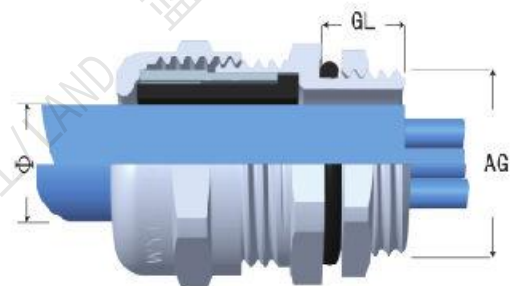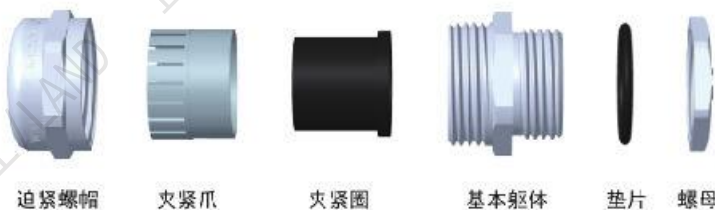

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	CaTle range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG8T-04	M8×1.25	8	3~4	6	11/11	100
MG10T-06	M10×1.0	10	3~6.5	6	14/14	100
MG12T-06	M12×1.5	12	3~6.5	6	14/14	100
MG12T-08	M12×1.5	12	4~8	6	14/16	100
MG14T-06	M14×1.5	14	3~6.5	6	14/16	100
MG14T-08	M14×1.5	14	4~8	7	17/17	100
MG16T-08	M16×1.5	16	4~8	7	17/18	100
MG16T-10	M16×1.5	16	5~10	7	20/20	100
MG18T-10	M18×1.5	18	5~10	7	20/20	100
MG20T-10	M20×1.5	20	5~10	8	20/22	100
MG20T-12	M20×1.5	20	6~12	8	22/22	100
MG20T-14	M20×1.5	20	8~14	8	24/24	100
MG22T-14	M22×1.5	22	8~14	8	24/24	100
MG24T-14	M24×1.5	24	8~14	8	24/27	100
MG25T-14	M25×1.5	25	8~14	8	24/27	50
MG25T-16	M25×1.5	25	10~16	8	27/27	50
MG25T-18	M25×1.5	25	13~18	8	30/30	50
MG27T-18	M27×1.5(2)	27	13~18	8	30/30	50
MG30T-18	M30×1.5(2)	30	13~18	8	30/32	50
MG30T-20	M30×1.5(2)	30	15~20	8	30/32	50
MG32T-22	M32×1.5(2)	32	15~22	9	34/34	50
MG32T-25	M32×1.5(2)	32	18~25	9	40/40	50
MG33T-22	M33×1.5(2)	33	15~22	9	34/36	50
MG36T-25	M36×1.5(2)	36	18~25	9	40/40	50
MG40T-25	M40×1.5(2)	40	18~25	9	40/43	20
MG40T-28	M40×1.5(2)	40	20~28	10	43/43	20
MG40T-30	M40×1.5(2)	40	22~30	10	45/45	20
MG40T-32	M40×1.5(2)	40	24~32	10	50/50	20
MG42T-28	M42×1.5(2)	42	20~28	10	43/45	20
MG48T-32	M48×1.5(2)	48	24~32	10	50/52	20
MG50T-32	M50×1.5(2)	50	24~32	10	57/55	20
MG50T-38	M50×1.5(2)	50	30~38	10	58/55	20
MG60T-44	M60×1.5(2)	60	37~44	12	64/64	10
MG63T-44	M63×1.5(2)	63	37~44	12	64/68	10
MG63T-53	M63×1.5(2)	63	43~53	15	78/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
PG7T-06	PG7	12.5	3~6.5	6	14/14	100
PG9T-08	PG9	15.2	4~8	7	17/17	100
PG11T-10	PG11	18.6	5~10	7	20/20	100
PG13.5T-12	PG13.5	20.4	6~12	7	22/22	100
PG16T-14	PG16	22.5	8~14	8	24/24	100
PG19T-14	PG19	23.8	8~14	8	24/27	100
PG21T-18	PG21	28.3	13~18	8	30/30	50
PG25T-18	PG25	30	13~18	8	30/32	50
PG29T-25	PG29	37	18~25	9	40/40	50
PG36T-32	PG36	47	24~32	10	50/50	20
PG42T-38	PG42	54	30~38	10	58/58	10
PG48T-44	PG48	59.3	37~44	12	64/64	10
PG63T-52	PG63	71	42~52	15	76	10
G1/4T-06	G1/4	13.15	3~6.5	6	14/16	100
G3/8T-08	G3/8	16.65	4~8	7	17/18	100
G1/2T-12	G1/2	20.95	6~12	8	22/22	100
G3/4T-18	G3/4	26.44	13~18	8	30/30	100
G1T-22	G1	33.24	16~22	9	34/36	50
G1T-25	G1	33.24	18~25	9	40/40	50
G1-1/4T-28	G1-1/4	41.91	22~28	10	43/45	20
G1-1/4T-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2T-32	G1-1/2	47.8	25~32	10	50/52	20
G2T-44	G2	59.61	37~44	12	64/64	10
NPT1/4T-06	NPT1/4	13.15	3~6.5	6	14/16	100
NPT3/8T-08	NPT3/8	16.65	4~8	7	17/18	100
NPT1/2T-12	NPT1/2	20.95	6~12	8	22/22	100
NPT3/4T-18	NPT3/4	26.44	13~18	8	30/30	100
NPT1T-22	NPT1	33.24	16~22	9	34/36	50
NPT1T-25	NPT1	33.24	18~25	9	40/40	50
NPT1-1/4T-28	NPT1-1/4	41.91	22~28	10	43/45	20
NPT1-1/4T-30	NPT1-1/4	41.91	23~30	10	45/45	20
NPT1-1/2T-32	NPT1-1/2	47.8	25~32	10	50/52	20
NPT2T-44	NPT2	59.61	37~44	12	64/64	10
NPT2-1/2T-52	NPT2-1/2	76	42~52	15	76/81	10
NPT3T-70	NPT3	90	65~70	18	98/98	10

A-EMC防磁波铜镀镍电缆防水接头

A-EMC Nickel Plated Brass shield cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 加厚黄铜镀镍配合三元乙丙橡胶制成,

多爪式防磁波片设计, 紫铜材质制成, 具有防电

磁干扰, 防护等级高, 抗拉力强等特性

订购说明: 默认不附螺母, 配扁形密封垫片



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Thick brass plated with nickel and made of EPDM rubber, with a multi claw anti magnetic wave plate design and made of purple copper material. It has the characteristics of anti electromagnetic interference, high protection level, and strong tensile strength

Ordering Tips: Default without nut, equipped with flat sealing gasket



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG12A-08	M12×1.5	12	4~8	8	17/17	50
EMC-MG12A-05	M12×1.5	12	3~5	8	17/17	50
EMC-MG16AS-08	M16×1.5	16	4~8	8	18/18	50
EMC-MG16A-10	M16×1.5	16	6~10	9	22/22	50
EMC-MG16A-07	M16×1.5	16	4~7	9	22/22	50
EMC-MG20A-14	M20×1.5	20	8~14	10	26/26	50
EMC-MG20AS-12	M20×1.5	20	7~12	10	24/24	50
EMC-MG20AS-09	M20×1.5	20	5~9	10	24/24	50
EMC-MG25A-18	M25×1.5	25	13~18	12	32/32	50
EMC-MG25A-16	M25×1.5	25	11~16	12	32/32	50
EMC-MG32A-25	M32×1.5	32	18~25	12.5	40/40	20
EMC-MG32A-22	M32×1.5	32	16~22	12.5	40/40	20
EMC-MG40A-31	M40×1.5	40	24~31	15	50/50	10
EMC-MG40A-25	M40×1.5	40	18~25	15	50/50	10
EMC-MG50A-41	M50×1.5	50	33~41	15	59/59	10
EMC-MG50A-33	M50×1.5	50	25~33	15	59/59	10
EMC-MG63A-51	M63×1.5	63	46~51	15	73/73	10
EMC-MG63A-46	M63×1.5	63	40~46	15	73/73	10
EMC-PG7A-08	PG7	12.5	4~8	8	17/17	50
EMC-PG9A-08	PG9	15.2	4~8	8	18/18	50
EMC-PG11A-10	PG11	18.6	6~10	9	22/22	50
EMC-PG11A-07	PG11	18.6	4~7	9	22/22	50
EMC-PG13.5A-12	PG13.5	20.4	7~12	9.5	24/24	50
EMC-PG13.5A-09	PG13.5	20.4	5~9	9.5	24/24	50
EMC-PG16A-14	PG16	22.5	8~14	10	26/26	50
EMC-PG16A-11	PG16	22.5	6~11	10	26/26	50
EMC-PG21A-18	PG21	28.3	13~18	12	32/32	50
EMC-PG21A-16	PG21	28.3	11~16	12	32/32	50
EMC-PG29A-25	PG29	37	18~25	12.5	40/40	20
EMC-PG29A-22	PG29	37	16~22	12.5	40/40	20
EMC-PG36A-30	PG36	47	24~30	15	50/50	10
EMC-PG36A-25	PG36	47	18~25	15	50/50	10
EMC-PG42A-40	PG42	54	33~40	15	59/59	10
EMC-PG42A-33	PG42	54	25~33	15	59/59	10
EMC-PG48A-51	PG48	59.3	44~51	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
EMC-G1/4A-08	G1/4	13.15	4~8	8	17/17	50
EMC-G1/4A-05	G1/4	13.15	3~5	8	17/17	50
EMC-G3/8A-10	G3/8	16.66	6~10	9	22/22	50
EMC-G3/8A-07	G3/8	16.66	4~7	9	22/22	50
EMC-G1/2A-12	G1/2	20.95	7~12	9.5	24/24	50
EMC-G1/2A-09	G1/2	20.95	5~9	9.5	24/24	50
EMC-G1/2A-14	G1/2	20.95	8~14	10	26/26	50
EMC-G3/4A-18	G3/4	26.66	13~18	12	32/32	50
EMC-G3/4A-16	G3/4	26.66	11~16	12	32/32	50
EMC-G1A-25	G1	33.2	18~25	12.5	40/40	20
EMC-G1A-22	G1	33.2	16~22	12.5	40/40	20
EMC-G1-1/4A-31	G1-1/4	41.9	24~31	15	50/50	10
EMC-G1-1/4A-25	G1-1/4	41.9	18~25	15	50/50	10
EMC-G1-1/2A-41	G1-1/2	47.8	33~41	15	59/59	10
EMC-G1-1/2A-33	G1-1/2	47.8	25~33	15	59/59	10
EMC-G2A-51	G2	59.6	44~51	15	68/68	10
EMC-G2A-46	G2	59.6	39~46	15	68/68	10
EMC-NPT1/4A-08	NPT1/4	13.15	4~8	8	17	50
EMC-NPT1/4A-05	NPT1/4	13.15	3~5	8	17	50
EMC-NPT3/8A-10	NPT3/8	16.66	6~10	9	22	50
EMC-NPT3/8A-07	NPT3/8	16.66	4~7	9	22	50
EMC-NPT1/2A-12	NPT1/2	20.95	7~12	9.5	24	50
EMC-NPT1/2A-09	NPT1/2	20.95	5~9	9.5	24	50
EMC-NPT1/2A-14	NPT1/2	20.95	8~14	10	26	50
EMC-NPT3/4A-18	NPT3/4	26.66	13~18	12	32	50
EMC-NPT3/4A-16	NPT3/4	26.66	11~16	12	32	50
EMC-NPT1A-25	NPT1	33.2	18~25	12.5	40	20
EMC-NPT1A-22	NPT1	33.2	16~22	12.5	40	20
EMC-NPT1-1/4A-31	NPT1-1/4	41.9	24~31	15	50	10
EMC-NPT1-1/4A-25	NPT1-1/4	41.9	18~25	15	50	10
EMC-NPT1-1/2A-41	NPT1-1/2	47.8	33~41	15	59	10
EMC-NPT1-1/2A-33	NPT1-1/2	47.8	25~33	15	59	10
EMC-NPT2A-51	NPT2	59.6	44~51	15	68	10
EMC-NPT2A-46	NPT2	59.6	39~46	15	68	10

B-EMC防磁波铜镀镍电缆防水接头

B-EMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃


设计特点：采用黄铜镀镍，硅胶与尼龙夹紧爪制成，

多爪式防磁波片设计，紫铜材质制成，具有防电磁

干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配O型密封圈

LAND 蓝江

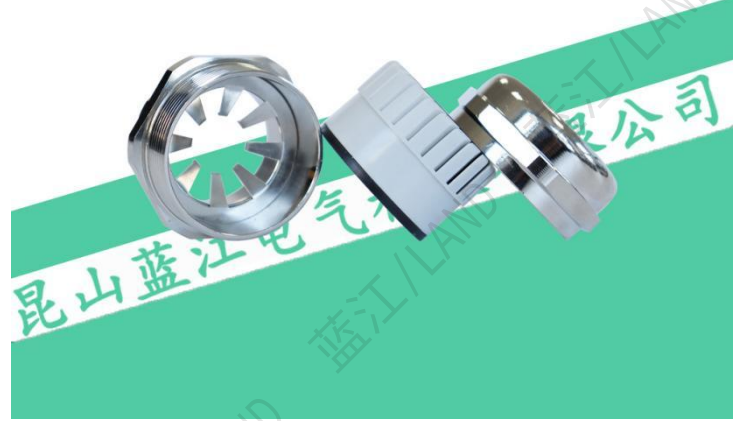

Product materials: Nickel Plated Brass


Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of brass nickel plating, silicone and nylon clamping claws, multi claw anti magnetic wave plate design, made of purple copper material, with characteristics of anti electromagnetic interference, high protection level, strong tensile strength, etc

Ordering Tips: Default without nut, equipped with O-ring seal

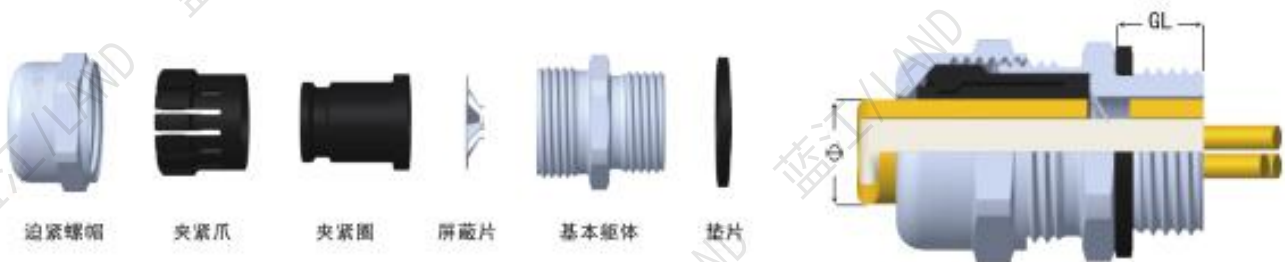

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG10B-06	M10×1.5	10	3~6.5	6	14/14	100
EMC-MG12B-06	M12×1.5	12	3~6.5	6	14/14	100
EMC-MG12B-08	M12×1.5	14	4~8	6	14/16	100
EMC-MG14B-08	M14×1.5	14	4~8	7	17/17	100
EMC-MG16B-08	M16×1.5	16	4~8	7	17/18	100
EMC-MG16B-10	M16×1.5	16	5~10	7	20/20	100
EMC-MG18B-10	M18×1.5	18	5~10	7	20/20	100
EMC-MG20B-08	M20×1.5	20	4~8	8	17/22	100
EMC-MG20B-10	M20×1.5	20	5~10	8	20/22	100
EMC-MG20B-12	M20×1.5	20	6~12	8	22/22	100
EMC-MG20B-14	M20×1.5	20	8~14	8	24/24	100
EMC-MG22B-14	M22×1.5	22	8~14	8	24/24	100
EMC-MG24B-14	M24×1.5	24	8~14	8	24/27	100
EMC-MG25B-14	M25×1.5	25	8~14	8	24/27	50
EMC-MG25B-16	M25×1.5	25	10~16	8	27/27	50
EMC-MG25B-18	M25×1.5	25	13~18	8	30/30	50
EMC-MG27B-18	M27×2.0	27	13~18	8	30/30	50
EMC-MG30B-18	M30×2.0	30	13~18	8	30/32	50
EMC-MG30B-20	M30×2.0	30	15~20	8	30/32	50
EMC-MG32B-18	M32×1.5	32	13~18	9	34	50
EMC-MG32B-22	M32×1.5	32	15~22	9	34/34	50
EMC-MG32B-25	M32×1.5	32	18~25	9	40/40	50
EMC-MG33B-22	M33×2.0	33	15~22	9	34/36	50
EMC-MG36B-25	M36×2.0	36	18~25	9	40/40	50
EMC-MG40B-25	M40×1.5	40	18~25	9	40/43	20
EMC-MG40B-28	M40×1.5	40	20~28	10	43/43	20
EMC-MG40B-30	M40×1.5	40	22~30	10	45/45	20
EMC-MG40B-32	M40×1.5	40	24~32	10	50/50	20
EMC-MG42B-28	M42×2.0	42	20~28	10	50/50	20
EMC-MG48B-32	M48×2.0	48	24~32	10	50/52	20
EMC-MG50B-32	M50×1.5	50	24~32	10	57/55	10
EMC-MG50B-38	M50×1.5	50	30~38	10	57/55	10
EMC-MG60B-44	M60×2.0	60	37~44	12	64/64	10
EMC-MG63B-44	M63×1.5	63	37~44	12	64/68	10
EMC-MG64B-44	M64×2.0	64	37~44	12	64/68	10

产品参数表/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
EMC-PG7B-06	PG7	12.5	3~6.5	6	14/14	100
EMC-PG7B-08	PG7	12.5	4~8	7	14/14	100
EMC-PG9B-08	PG9	15.2	4~8	7	17/17	100
EMC-PG11B-10	PG11	18.6	5~10	7	20/20	100
EMC-PG13.5B-12	PG13.5	20.4	6~12	7	22/22	100
EMC-PG16B-14	PG16	22.5	8~14	8	24/24	100
EMC-PG19B-14	PG19	23.8	8~14	8	24/27	100
EMC-PG21B-18	PG21	28.3	13~18	8	30/30	50
EMC-PG25B-22	PG25	30	16~22	8	30/32	50
EMC-PG29B-25	PG29	37	18~25	9	40/40	20
EMC-PG36B-32	PG36	47	24~32	10	50/50	20
EMC-PG42B-38	PG42	54	30~38	10	58/58	10
EMC-PG48B-44	PG48	59.3	37~44	12	64/64	10
EMC-G1/4B-06	G1/4	13.15	3~6.5	6	14/16	100
EMC-G1/4B-08	G1/4	13.15	4~8	6	14/16	100
EMC-G3/8B-08	G3/8	16.65	4~8	7	17/18	100
EMC-G1/2B-12	G1/2	20.95	6~12	8	22/22	100
EMC-G3/4B-18	G3/4	26.44	13~18	8	30/30	100
EMC-G1B-22	G1	33.24	16~22	9	34/36	20
EMC-G1-1/4B-28	G1-1/4	41.91	22~28	10	43/45	20
EMC-G1-1/4B-30	G1-1/4	41.91	23~30	10	45/45	20
EMC-G1-1/2B-32	G1-1/2	47.80	25~32	10	50/52	10
EMC-G2B-44	G2	59.61	37~44	12	64/64	10
EMC-NPT1/4B-06	NPT1/4	13.15	3~6.5	6	14/16	100
EMC-NPT1/4B-08	NPT1/4	13.15	4~8	6	14/16	100
EMC-NPT3/8B-08	NPT3/8	16.65	4~8	7	17/18	100
EMC-NPT1/2B-12	NPT1/2	20.95	6~12	8	22/22	100
EMC-NPT3/4B-18	NPT3/4	26.44	13~18	8	30/30	50
EMC-NPT1B-22	NPT1	33.24	16~22	9	34/36	20
EMC-NPT1-1/4B-28	NPT1-1/4	41.91	22~28	10	43/45	20
EMC-NPT1-1/4B-30	NPT1-1/4	41.91	23~30	10	45/45	20
EMC-NPT1-1/2B-32	NPT1-1/2	47.80	25~32	10	50/52	10
EMC-NPT2B-44	NPT2	59.61	37~44	12	64/64	10

HEMC新能源防磁波铜镀镍电缆接头

HEMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

螺纹规格：公制M牙

产品特性：符合CE， IP68

温度测试：-40℃~105℃， 短时可达120℃

设计特点：黄镀镍配合改性橡胶制成， 弹簧防磁波设计， 具有防电磁干扰， 防护等级高， 抗拉力强等特性

订购说明：默认不附螺母， 配O型密封圈



Product materials: Nickel Plated Brass

Thread Standard: Metric thread

Product Features: Compliant with CE, IP68

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Made of yellow nickel plating combined with modified rubber, with a spring anti magnetic wave design, it has the characteristics of anti electromagnetic interference, high protection level, and strong tensile strength

Ordering Tips: Default without nut, equipped with O-ring seal

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
HEMC-MG20-14	M20×1.5	20	8~14	7	24/24	50
HEMC-MG25-18	M25×1.5	25	13~18	9	30/30	50
HEMC-MG32-24	M32×1.5	32	18~24	11	36/36	20
HEMC-MG40-35	M40×1.5	40	28~35	11	50/46	10
HEMC-MG50-38	M50×1.5	50	30~38	12	57/55	10

T-EMC防磁波铜镀镍电缆防水接头

T-EMC Nickel Plated Brass shield cable gland

产品材料：黄铜镀镍

产品特性：符合CE，IP68、UL94V-2

温度测试：-40℃~105℃，短时可达120℃

设计特点：弹片式防磁波片设计，紫铜材质制成，具有防电磁干扰，防护等级高，抗拉力强等特性

订购说明：默认不附螺母，配O型密封圈


Product materials: Nickel Plated Brass

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: Shrapnel type anti magnetic wave plate design, made of purple copper material, anti electromagnetic interference

Ordering Tips: Default without nut, equipped with O-ring seal

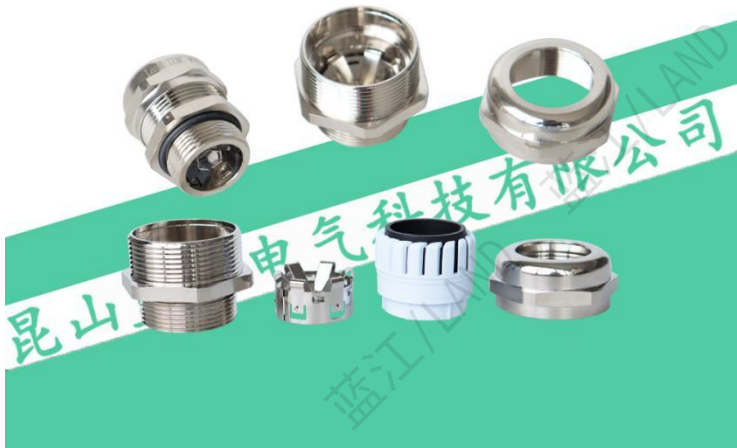

产品参数表/M

蓝江产品型号	螺纹规格	屏蔽电缆	电缆直径	螺纹长度	扳手尺寸	包装
Product model	Thread size	shielded cable	cable diameter	Thread length	Wrench Size	packaging
PN.	Metric	B mm	C mm	GL mm	nut/cap mm	PCS
TEMC-M12-06	M12×1.5	2~5	3~6.5	6	14/14	50
TEMC-M12-08	M12×1.5	2~5	4~8	6	20/19	50
TEMC-M16-10	M16×1.5	3~8	5~10	7	20/20	50
TEMC-M20-12	M20×1.5	5.5~11	6~12	7	22/22	50
TEMC-M20-14	M20×1.5	5.5~12	8~14	7	24/24	50
TEMC-M25-16	M25×1.5	8.5~15	10~16	8	27/27	50
TEMC-M25-18	M25×1.5	8.5~16	13~18	8	30/30	50
TEMC-M32-22	M32×1.5	12.5~20	15~22	9	34/34	20
TEMC-M32-25	M32×1.5	12.5~22	18~25	9	40/40	20
TEMC-M40-30	M40×1.5	18.5~28	22~30	9	45/45	5
TEMC-M50-38	M50×1.5	27~36	30~38	9	58/55	2
TEMC-M63-44	M63×1.5	33~42	37~44	10	65/70	2

KEMC铠装防磁波铜镀镍电缆接头

KEMC Nickel Plated Brass shield cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 铠装式防磁波片设计, 紫铜材质制成, 具有防电磁干扰, 防护等级高, 抗拉力强等特性

订购说明: 默认不附螺母, 配扁形密封垫片, 部分型号需要定制

LAND 蓝江



Product materials: Nickel Plated Brass


Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: armor anti magnetic wave plate design, made of purple copper material, anti electromagnetic interference

Ordering Tips: Default without nut, equipped with flat sealing gasket, Some models require customization

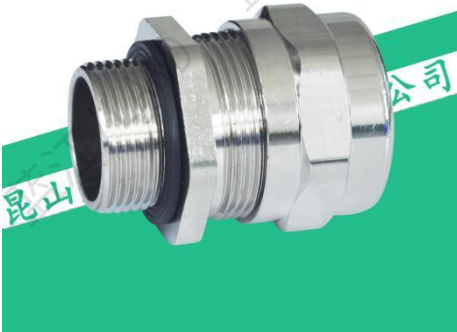

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	包装
Product model	Thread size	Hole size	Cable range	Thread length	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	PCS
KEMC-M16-10	M16×1.5	16	6~10	9	50
KEMC-M20-14	M20×1.5	20	8~14	10	50
KEMC-M20-16	M20×1.5	20	11~16	10	50
KEMC-M20-18	M20×1.5	20	13~18	10	50
KEMC-M20-20	M20×1.5	20	15~20	10	50
KEMC-M25-14	M25×1.5	25	8~14	12	20
KEMC-M25-18	M25×1.5	25	13~18	12	20
KEMC-M25-21	M25×1.5	25	16~21	12	20
KEMC-M32-25	M32×1.5	32	18~25	12	10
KEMC-M32-28	M32×1.5	32	20~28	12	10
KEMC-M40-35	M40×1.5	40	26~35	15	10
KEMC-M50-41	M50×1.5	50	34~41	15	5
KEMC-M63-50	M63×1.5	63	40~50	18	1
KEMC-G1/2-14	G1/2	20.99	8~14	10	50
KEMC-G1/2-18	G1/2	20.99	13~18	10	50
KEMC-G1/2-21	G1/2	20.99	16~21	10	50
KEMC-G3/4-18	G3/4	26.44	13~18	12	20
KEMC-G3/4-21	G3/4	26.44	16~21	12	20
KEMC-G1-25	G1	33.25	18~25	12	10
KEMC-G1-28	G1	33.25	20~28	12	10
KEMC-G1-1/4-35	G1-1/4	41.91	26~35	15	10
KEMC-G1-1/2-41	G1-1/2	47.8	34~41	15	5
KEMC-G2-50	G2	59.61	40~50	18	1
KEMC-G2-55	G2	59.61	43~55	18	1
KEMC-NPT1/2-14	NPT1/2	20.99	8~14	10	50
KEMC-NPT1/2-18	NPT1/2	20.99	13~18	10	50
KEMC-NPT1/2-21	NPT1/2	20.99	16~21	10	50
KEMC-NPT3/4-18	NPT3/4	26.44	13~18	12	20
KEMC-NPT3/4-21	NPT3/4	26.44	16~21	12	20
KEMC-NPT1-25	NPT1	33.25	18~25	12	10
KEMC-NPT1-28	NPT1	33.25	20~28	12	10
KEMC-NPT1-1/4-35	NPT1-1/4	41.91	26~35	15	10
KEMC-NPT1-1/2-41	NPT1-1/2	47.8	34~41	15	5
KEMC-NPT2-50	NPT2	59.61	40~50	18	1

扁孔防爆铜镀镍电缆防水接头

Flat hole Brass explosion-proof cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

设计特点: 加厚黄铜镀镍配合三元乙丙橡胶制成, 扁

形密封圈分体设计, 防护等级高, 抗拉力强, 适用于

各类扁电缆线及伴热带锁紧密封

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2


Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Thick brass plated with nickel and made of EPDM rubber, with a flat sealing ring split design, high protection level, strong tensile strength, suitable for locking and sealing various flat cables and heat tracing belts

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

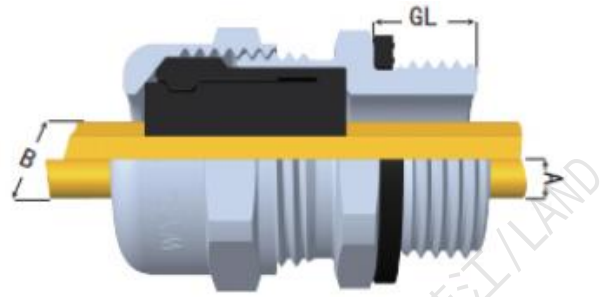

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
MG18A-0410	M18×1.5	18	4*10	9	26/26	50
MG18A-0814	M18×1.5	18	8*14	9	26/26	50
MG20AS-0508	M20×1.5	20	5*8	10	24/24	50
MG20AS-0612	M20×1.5	20	6*12	10	24/24	50
MG20A-0410	M20×1.5	20	4*10	10	26/26	50
MG20A-0814	M20×1.5	20	8*14	10	26/26	50
MG25A-0614	M25×1.5	25	7*14	12	32/32	50
MG32A-0519	M32×1.5	32	5*19	12.5	40/40	20
MG40A-1230	M40×1.5	40	12*30	15	50/50	10
MG40A-1232	M40×1.5	40	12*32	15	50/50	10
MG50A-1334	M50×1.5	50	13*34	15	59/59	10
MG63A-1642	M63×1.5	63	16*42	15	70/70	10
MG63A-2055	M63×1.5	63	20*55	15	70/70	10
PG13.5A-0508	PG13.5	20	5*8	10	24/24	50
PG13.5A-0612	PG13.5	20	6*12	10	24/24	50
PG16A-0410	PG16	20	4*10	10	26/26	50
PG16A-0814	PG16	20	8*14	10	26/26	50
PG21A-0614	PG21	25	7*14	12	32/32	50
PG29A-0519	PG29	32	5*19	12.5	40/40	20
PG36A-1230	PG36	40	12*30	15	50/50	10
PG36A-1232	PG36	40	12*32	15	50/50	10
PG42A-1334	PG42	50	13*34	15	59/59	10
PG48A-1642	PG48	63	16*42	15	70/70	10
PG48A-2055	PG48	63	20*55	15	70/70	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	S1/S2 mm	PCS
G1/2A-0508	G1/2	20	5*8	10	24/24	50
G1/2A-0712	G1/2	20	7*12	10	24/24	50
G1/2A-0410	G1/2	20	4*10	10	26/26	50
G1/2A-0814	G1/2	20	8*14	10	26/26	50
G3/4A-0614	G3/4	25	7*14	12	32/32	50
G1A-0519	G1	32	5*19	12.5	40/40	20
G1-1/4A-1230	G1-1/4	40	12*30	15	50/50	10
G1-1/4A-1232	G1-1/4	40	12*32	15	50/50	10
G1-1/2A-1334	G1-1/2	50	13*34	15	59/59	10
G2A-1642	G2	63	16*42	15	70/70	10
G2A-2055	G2	63	20*55	15	70/70	10
NPT1/2A-0508	NPT1/2	20	5*8	10	24/24	50
NPT1/2A-0712	NPT1/2	20	7*12	10	24/24	50
NPT1/2A-0410	NPT1/2	20	4*10	10	26/26	50
NPT1/2A-0814	NPT1/2	20	8*14	10	26/26	50
NPT3/4A-0614	NPT3/4	25	7*14	12	32/32	50
NPT1A-0519	NPT1	32	5*19	12.5	40/40	20
NPT1-1/4A-1230	NPT1-1/4	40	12*30	15	50/50	10
NPT1-1/4A-1232	NPT1-1/4	40	12*32	15	50/50	10
NPT1-1/2A-1334	NPT1-1/2	50	13*34	15	59/59	10
NPT2A-1642	NPT2	63	16*42	15	70/70	10
NPT2A-2055	NPT2	63	20*55	15	70/70	10

二孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

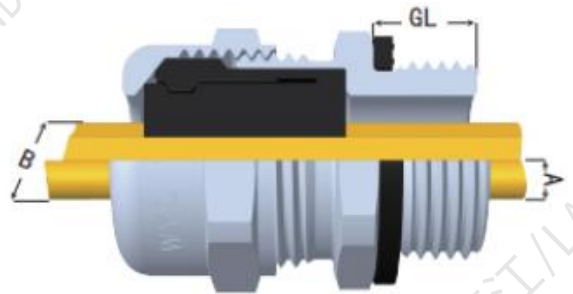

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H2-03	M12×1.5	12	1.5~3	8	17/17	50
MG16AS-H2-03	M16×1.5	16	1.5~3	8	18/18	50
MG16A-H2-02	M16×1.5	16	1.5~2.6	9	22/22	50
MG16A-H2-04	M16×1.5	16	2~4	9	22/22	50
MG18A-H2-02	M18×1.5	18	1.5~2.6	9	22/22	50
MG18A-H2-04	M18×1.5	18	2~4	9	22/22	50
MG18A-H2-06	M18×1.5	18	3~6	9.5	26/26	50
MG20AS-H2-05	M20×1.5	20	2~5	10	24/24	50
MG20A-H2-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H2-04	M20×1.5	20	2~4	10	26/26	50
MG20A-H2-05	M20×1.5	20	2~5	10	26/26	50
MG20A-H2-06	M20×1.5	20	3~6	10	26/26	50
MG20A-H2-07	M20×1.5	20	4~7	10	26/26	50
MG22A-H2-03	M22×1.5	22	1.5~3	10	26/26	50
MG22A-H2-04	M22×1.5	22	2~4	10	26/26	50
MG22A-H2-05	M22×1.5	22	2~5	10	26/26	50
MG22A-H2-06	M22×1.5	22	3~6	10	26/26	50
MG22A-H2-07	M22×1.5	22	4~7	10	26/26	50
MG25A-H2-05	M25×1.5	25	3~5.5	12	32/32	50
MG25A-H2-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H2-08	M25×1.5	25	5~8	12	32/32	50
MG25A-H2-09	M25×1.5	25	6~9	12	32/32	50
MG32A-H2-10	M32×1.5	32	6~10	12.5	40/40	20
MG32A-H2-12	M32×1.5	32	9~12	12.5	40/40	20
MG40A-H2-13	M40×1.5	40	9~13	15	50/50	10
MG50A-H2-15	M50×1.5	50	11~15	15	59/59	10
MG63A-H2-17	M63×1.5	63	14~17	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	Φ mm	Φ mm	GL mm	cap mm	pcs
PG7A-H2-03	PG7	12.5	1.5~3	8	17/17	50
PG9A-H2-03	PG9	15.2	1.5~3	8	18/18	50
PG11A-H2-02	PG11	18.6	1.5~2.6	9	22/22	50
PG11A-H2-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-H2-05	PG13.5	20.4	2~5	9.5	24/24	50
PG16A-H2-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H2-04	PG16	22.5	2~4	10	26/26	50
PG16A-H2-05	PG16	22.5	2~5	10	26/26	50
PG16A-H2-06	PG16	22.5	3~6	10	26/26	50
PG16A-H2-07	PG16	22.5	4~7	10	26/26	50
PG19A-H2-03	PG19	23.8	1.5~3	10	26/26	50
PG19A-H2-04	PG19	23.8	2~4	10	26/26	50
PG19A-H2-05	PG19	23.8	2~5	10	26/26	50
PG19A-H2-06	PG19	23.8	3~6	10	26/26	50
PG19A-H2-07	PG19	23.8	4~7	10	26/26	50
PG21A-H2-05	PG21	28.3	3~5.5	12	32/32	50
PG21A-H2-06	PG21	28.3	3~6	12	32/32	50
PG21A-H2-08	PG21	28.3	5~8	12	32/32	50
PG21A-H2-09	PG21	28.3	6~9	12	32/32	50
PG25A-H2-05	PG25	29.8	3~5.5	12	32/32	50
PG25A-H2-06	PG25	29.8	3~6	12	32/32	50
PG25A-H2-08	PG25	29.8	5~8	12	32/32	50
PG25A-H2-09	PG25	29.8	6~9	12	32/32	50
PG29A-H2-10	PG29	37	6~10	12.5	40/40	20
PG29A-H2-12	PG29	37	9~12	12.5	40/40	20
PG36A-H2-13	PG36	47	9~13	15	50/50	10
PG42A-H2-15	PG42	54	11~15	15	59/59	10
PG48A-H2-17	PG48	59.3	14~17	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H2-03	G1/4	13.15	1.5~3	8	17/17	50
G3/8A-H2-04	G3/8	16.66	2~4	9	22/22	50
G1/2AS-H2-05	G1/2	20.95	2~5	9.5	24/24	50
G1/2A-H2-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H2-04	G1/2	20.95	2~4	10	26/26	50
G1/2A-H2-05	G1/2	20.95	2~5	10	26/26	50
G1/2A-H2-06	G1/2	20.95	3~6	10	26/26	50
G1/2A-H2-07	G1/2	20.95	4~7	10	26/26	50
G3/4A-H2-05	G3/4	26.66	3~5.5	12	32/32	50
G3/4A-H2-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H2-08	G3/4	26.66	5~8	12	32/32	50
G3/4A-H2-09	G3/4	26.66	6~9	12	32/32	50
G1A-H2-10	G1	33.2	6~10	12.5	40/40	20
G1A-H2-12	G1	33.2	9~12	12.5	40/40	20
G1-1/4A-H2-13	G1-1/4	41.9	9~13	15	50/50	10
G1-1/2A-H2-15	G1-1/2	47.8	11~15	15	59/59	10
G2A-H2-17	G2	59.6	14~17	15	68/68	10
NPT1/4A-H2-03	NPT1/4	13.15	1.5~3	8	17/17	50
NPT3/8A-H2-04	NPT3/8	16.66	2~4	9	22/22	50
NPT1/2AS-H2-05	NPT1/2	20.95	2~5	9.5	24/24	50
NPT1/2A-H2-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H2-04	NPT1/2	20.95	2~4	10	26/26	50
NPT1/2A-H2-05	NPT1/2	20.95	2~5	10	26/26	50
NPT1/2A-H2-06	NPT1/2	20.95	3~6	10	26/26	50
NPT1/2A-H2-07	NPT1/2	20.95	4~7	10	26/26	50
NPT3/4A-H2-05	NPT3/4	26.66	3~5.5	12	32/32	50
NPT3/4A-H2-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H2-08	NPT3/4	26.66	5~8	12	32/32	50
NPT3/4A-H2-09	NPT3/4	26.66	6~9	12	32/32	50
NPT1A-H2-10	NPT1	33.2	6~10	12.5	40/40	20
NPT1A-H2-12	NPT1	33.2	9~12	12.5	40/40	20
NPT1-1/4A-H2-13	NPT1-1/4	41.9	9~13	15	50/50	10
NPT1-1/2A-H2-15	NPT1-1/2	47.8	11~15	15	59/59	10
NPT2A-H2-17	NPT2	59.6	14~17	15	68/68	10

三孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

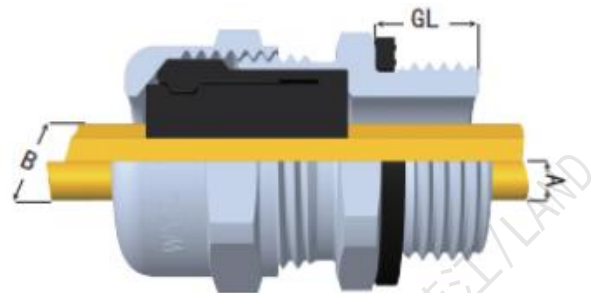

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H3-02	M12×1.5	12	1~2.6	8	17/17	50
MG16AS-H3-02	M16×1.5	16	1~2.6	8	18/18	50
MG16A-H3-03	M16×1.5	16	1.5~3	9	22/22	50
MG16A-H3-04	M16×1.5	16	2~4	9	22/22	50
MG18A-H3-03	M18×1.5	18	1.5~3	9	22/22	50
MG18A-H3-04	M18×1.5	18	2~4	9	22/22	50
MG18A-H3-03	M18×1.5	18	1.5~3	9.5	26/26	50
MG18A-H3-05	M18×1.5	18	2~5	9.5	26/26	50
MG18A-H3-06	M18×1.5	18	3~6	9.5	26/26	50
MG20AS-H3-05	M20×1.5	20	2~5	10	24/24	50
MG20A-H3-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H3-05	M20×1.5	20	2~5	10	26/26	50
MG20A-H3-06	M20×1.5	20	3~6	10	26/26	50
MG22A-H3-03	M22×1.5	22	1.5~3	10	26/26	50
MG22A-H3-05	M22×1.5	22	2~5	10	26/26	50
MG22A-H3-06	M22×1.5	22	3~6	10	26/26	50
MG25A-H3-05	M25×1.5	25	2~5	12	32/32	50
MG25A-H3-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H3-07	M25×1.5	25	4~7	12	32/32	50
MG25A-H3-08	M25×1.5	25	5~8	12	32/32	50
MG32A-H3-10	M32×1.5	32	6~10	12.5	40/40	20
MG40A-H3-11	M40×1.5	40	8~11	15	50/50	10
MG40A-H3-13	M40×1.5	40	10~13	15	50/50	10
MG40A-H3-14	M40×1.5	40	11~14	15	50/50	10
MG50A-H3-12	M50×1.5	50	9~12	15	59/59	10
MG63A-H3-13	M63×1.5	63	9~13	15	73/73	10

产品参数表/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
PG7A-H3-02	PG7	12.5	1~2.6	8	17/17	50
PG9A-H3-02	PG9	15.2	1~2.3	8	18/18	50
PG11A-H3-03	PG11	18.6	1.5~3	9	22/22	50
PG11A-H3-04	PG11	18.6	2~4	9	22/22	50
PG13.5A-H3-05	PG13.5	20.4	2~5	9.5	24/24	50
PG16A-H3-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H3-05	PG16	22.5	2~5	10	26/26	50
PG16A-H3-06	PG16	22.5	3~6	10	26/26	50
PG19A-H3-03	PG19	23.8	1.5~3	10	26/26	50
PG19A-H3-05	PG19	23.8	2~5	10	26/26	50
PG19A-H3-06	PG19	23.8	3~6	10	26/26	50
PG21A-H3-05	PG21	28.3	2~5	12	32/32	50
PG21A-H3-06	PG21	28.3	3~6	12	32/32	50
PG21A-H3-07	PG21	28.3	4~7	12	32/32	50
PG21A-H3-08	PG21	28.3	5~8	12	32/32	50
PG25A-H3-05	PG25	29.8	2~5	12	32/32	50
PG25A-H3-06	PG25	29.8	3~6	12	32/32	50
PG25A-H3-07	PG25	29.8	4~7	12	32/32	50
PG25A-H3-08	PG25	29.8	5~8	12	32/32	50
PG29A-H3-10	PG29	37	6~10	12.5	40/40	20
PG36A-H3-11	PG36	47	8~11	15	50/50	10
PG36A-H3-13	PG36	47	10~13	15	50/50	10
PG36A-H3-14	PG36	47	11~14	15	50/50	10
PG42A-H3-12	PG42	54	9~12	15	59/59	10
PG48A-H3-13	PG48	59.3	9~13	15	73/73	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H3-02	G1/4	13.15	1~2.6	8	17/17	50
G3/8A-H3-04	G3/8	16.66	2~4	9	22/22	50
G1/2AS-H3-05	G1/2	20.95	2~5	9.5	24/24	50
G1/2A-H3-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H3-05	G1/2	20.95	2~5	10	26/26	50
G1/2A-H3-06	G1/2	20.95	3~6	10	26/26	50
G3/4A-H3-05	G3/4	26.66	2~5	12	32/32	50
G3/4A-H3-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H3-07	G3/4	26.66	4~7	12	32/32	50
G3/4A-H3-08	G3/4	26.66	5~8	12	32/32	50
G1A-H3-10	G1	33.2	6~10	12.5	40/40	20
G1-1/4A-H3-11	G1-1/4	41.9	8~11	15	50/50	10
G1-1/4A-H3-13	G1-1/4	41.9	10~13	15	50/50	10
G1-1/4A-H3-14	G1-1/4	41.9	11~14	15	50/50	10
G1-1/2A-H3-12	G1-1/2	47.8	9~12	15	59/59	10
G2A-H3-13	G2	59.6	9~13	15	68/68	10
NPT1/4A-H3-02	NPT1/4	13.15	1~2.6	8	17/17	50
NPT3/8A-H3-04	NPT3/8	16.66	2~4	9	22/22	50
NPT1/2AS-H3-05	NPT1/2	20.95	2~5	9.5	24/24	50
NPT1/2A-H3-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H3-05	NPT1/2	20.95	2~5	10	26/26	50
NPT1/2A-H3-06	NPT1/2	20.95	3~6	10	26/26	50
NPT3/4A-H3-05	NPT3/4	26.66	2~5	12	32/32	50
NPT3/4A-H3-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H3-07	NPT3/4	26.66	4~7	12	32/32	50
NPT3/4A-H3-08	NPT3/4	26.66	5~8	12	32/32	50
NPT1A-H3-10	NPT1	33.2	6~10	12.5	40/40	20
NPT1-1/4A-H3-11	NPT1-1/4	41.9	8~11	15	50/50	10
NPT1-1/4A-H3-13	NPT1-1/4	41.9	10~13	15	50/50	10
NPT1-1/4A-H3-14	NPT1-1/4	41.9	11~14	15	50/50	10
NPT1-1/2A-H3-12	NPT1-1/2	47.8	9~12	15	59/59	10
NPT2A-H3-13	NPT2	59.6	9~13	15	68/68	10

四孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

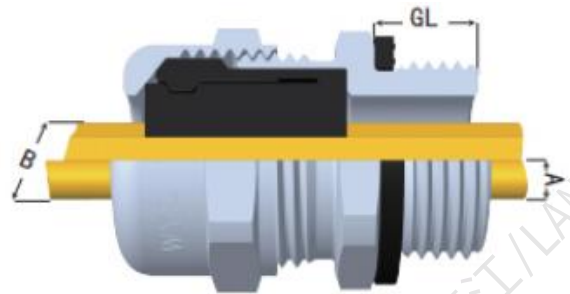

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG12A-H4-02	M12×1.5	12	1~2.3	8	17/17	50
MG16AS-H4-02	M16×1.5	16	1~2.3	8	18/18	50
MG16A-H4-03	M16×1.5	16	1.5~3	9	22/22	50
MG18A-H4-03	M18×1.5	18	1.5~3	9	22/22	50
MG18A-H4-05	M18×1.5	18	2~4.5	9.5	26/26	50
MG20AS-H4-04	M20×1.5	20	2~4	10	24/24	50
MG20A-H4-03	M20×1.5	20	1~2.5	10	26/26	50
MG20A-H4-04	M20×1.5	20	1.5~3.5	10	26/26	50
MG20A-H4-05	M20×1.5	20	2~4.5	10	26/26	50
MG25A-H4-05	M25×1.5	25	2~5	12	32/32	50
MG25A-H4-06	M25×1.5	25	3~6	12	32/32	50
MG25A-H4-07	M25×1.5	25	4~7	12	32/32	50
MG25A-H4-08	M25×1.5	25	5~8	12	32/32	50
MG25A-H4-09	M25×1.5	25	6~9	12	32/32	50
MG32A-H4-07	M32×1.5	32	4~7	12.5	40/40	20
MG32A-H4-09	M32×1.5	32	6~9	12.5	40/40	20
MG40A-H4-11	M40×1.5	40	8~11	15	50/50	10
MG40A-H4-12	M40×1.5	40	9~12	15	50/50	10
PG7A-H4-02	PG7	12.5	1~2.3	8	17/17	50
PG9A-H4-02	PG9	15.2	1~2.3	8	18/18	50
PG11A-H4-03	PG11	18.6	1.5~3	9	22/22	50
PG13.5A-H4-04	PG13.5	20.4	2~4	9.5	24/24	50
PG16A-H4-03	PG16	22.5	1~2.5	10	26/26	50
PG16A-H4-04	PG16	22.5	1.5~3.5	10	26/26	50
PG16A-H4-05	PG16	22.5	2~4.5	10	26/26	50
PG21A-H4-05	PG21	28.3	2~5	12	32/32	50
PG21A-H4-06	PG21	28.3	3~6	12	32/32	50
PG21A-H4-07	PG21	28.3	4~7	12	32/32	50
PG21A-H4-08	PG21	28.3	5~8	12	32/32	50
PG21A-H4-09	PG21	28.3	6~9	12	32/32	50
PG29A-H4-07	PG29	37	4~7	12.5	40/40	20
PG29A-H4-09	PG29	37	6~9	12.5	40/40	20
PG36A-H4-11	PG36	47	8~11	15	50/50	10
PG36A-H4-12	PG36	47	9~12	15	50/50	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
G1/4A-H4-02	G1/4	13.15	1~2.3	8	17/17	50
G3/8A-H4-03	G3/8	16.66	1.5~3	9	22/22	50
G1/2AS-H4-04	G1/2	20.95	2~4	9.5	24/24	50
G1/2A-H4-03	G1/2	20.95	1~2.5	10	26/26	50
G1/2A-H4-04	G1/2	20.95	1.5~3.5	10	26/26	50
G1/2A-H4-05	G1/2	20.95	2~4.5	10	26/26	50
G3/4A-H4-05	G3/4	26.66	2~5	12	32/32	50
G3/4A-H4-06	G3/4	26.66	3~6	12	32/32	50
G3/4A-H4-07	G3/4	26.66	4~7	12	32/32	50
G3/4A-H4-08	G3/4	26.66	5~8	12	32/32	50
G3/4A-H4-09	G3/4	26.66	6~9	12	32/32	50
G1A-H4-07	G1	33.2	4~7	12.5	40/40	20
G1A-H4-09	G1	33.2	6~9	12.5	40/40	20
G1-1/4A-H4-11	G1-1/4	41.9	8~11	15	50/50	10
G1-1/4A-H4-12	G1-1/4	41.9	9~12	15	50/50	10
NPT1/4A-H4-02	NPT1/4	13.15	1~2.3	8	17/17	50
NPT3/8A-H4-03	NPT3/8	16.66	1.5~3	9	22/22	50
NPT1/2AS-H4-04	NPT1/2	20.95	2~4	9.5	24/24	50
NPT1/2A-H4-03	NPT1/2	20.95	1~2.5	10	26/26	50
NPT1/2A-H4-04	NPT1/2	20.95	1.5~3.5	10	26/26	50
NPT1/2A-H4-05	NPT1/2	20.95	2~4.5	10	26/26	50
NPT3/4A-H4-05	NPT3/4	26.66	2~5	12	32/32	50
NPT3/4A-H4-06	NPT3/4	26.66	3~6	12	32/32	50
NPT3/4A-H4-07	NPT3/4	26.66	4~7	12	32/32	50
NPT3/4A-H4-08	NPT3/4	26.66	5~8	12	32/32	50
NPT3/4A-H4-09	NPT3/4	26.66	6~9	12	32/32	50
NPT1A-H4-07	NPT1	33.2	4~7	12.5	40/40	20
NPT1A-H4-09	NPT1	33.2	6~9	12.5	40/40	20
NPT1-1/4A-H4-11	NPT1-1/4	41.9	8~11	15	50/50	10
NPT1-1/4A-H4-12	NPT1-1/4	41.9	9~12	15	50/50	10

五孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

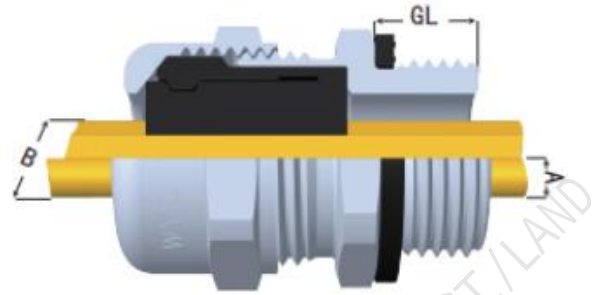

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG18A-H5-04	M18×1.5	18	2~4	9.5	26/26	50
MG20A-H5-03	M20×1.5	20	1.5~3	10	26/26	50
MG20A-H5-04	M20×1.5	20	2~4	10	26/26	50
MG25A-H5-05	M25×1.5	25	3~5	12	32/32	50
MG25A-H5-06	M25×1.5	25	4~6	12	32/32	50
MG32A-H5-08	M32×1.5	32	5~8	12.5	40/40	20
MG40A-H5-08	M40×1.5	40	5~8	15	50/50	10
MG40A-H5-09	M40×1.5	40	6~9	15	50/50	10
PG16A-H5-03	PG16	22.5	1.5~3	10	26/26	50
PG16A-H5-04	PG16	22.5	2~4	10	26/26	50
PG21A-H5-05	PG21	28.3	3~5	12	32/32	50
PG21A-H5-06	PG21	28.3	4~6	12	32/32	50
PG29A-H5-08	PG29	37	5~8	12.5	40/40	20
PG36A-H5-08	PG36	47	5~8	15	50/50	10
PG36A-H5-09	PG36	47	6~9	15	50/50	10
G1/2A-H5-03	G1/2	20.95	1.5~3	10	26/26	50
G1/2A-H5-04	G1/2	20.95	2~4	10	26/26	50
G3/4A-H5-05	G3/4	26.66	3~5	12	32/32	50
G3/4A-H5-06	G3/4	26.66	4~6	12	32/32	50
G1A-H5-08	G1	33.2	5~8	12.5	40/40	20
G1-1/4A-H5-08	G1-1/4	41.9	5~8	15	50/50	10
G1-1/4A-H5-09	G1-1/4	41.9	6~9	15	50/50	10
NPT1/2A-H5-03	NPT1/2	20.95	1.5~3	10	26/26	50
NPT1/2A-H5-04	NPT1/2	20.95	2~4	10	26/26	50
NPT3/4A-H5-05	NPT3/4	26.66	3~5	12	32/32	50
NPT3/4A-H5-06	NPT3/4	26.66	4~6	12	32/32	50
NPT1A-H5-08	NPT1	33.2	5~8	12.5	40/40	20
NPT1-1/4A-H5-08	NPT1-1/4	41.9	5~8	15	50/50	10
NPT1-1/4A-H5-09	NPT1-1/4	41.9	6~9	15	50/50	10

六孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍

LAND 蓝江

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db


设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

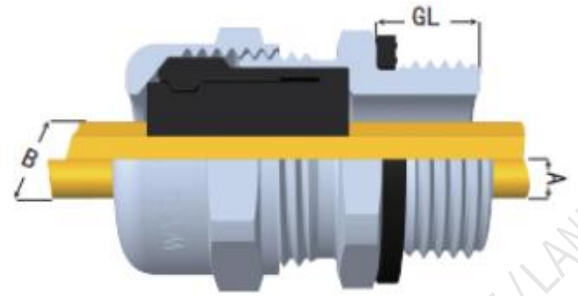

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG16A-H6-02	M16×1.5	16	1~2.1	9	22/22	50
MG18A-H6-04	M18×1.5	18	2~4	9.5	26/26	50
MG18A-H6-02	M18×1.5	18	1~2.1	9	22/22	50
MG20A-H6-03	M20×1.5	20	2~3.5	10	26/26	50
MG20A-H6-04	M20×1.5	20	2~4	10	26/26	50
MG25A-H6-05	M25×1.5	25	3~5	12	32/32	50
MG32A-H6-05	M32×1.5	32	3~5	12.5	40/40	20
MG32A-H6-07	M32×1.5	32	4~7	12.5	40/40	20
MG40A-H6-08	M40×1.5	40	5~8	15	50/50	10
MG63A-H6-12	M50×1.5	63	8~12	15	73/73	10
PG11A-H6-02	PG11	18.6	1~2.1	9	22/22	50
PG16A-H6-03	PG16	22.5	2~3.5	10	26/26	50
PG16A-H6-04	PG16	22.5	2~4	10	26/26	50
PG21A-H6-05	PG21	28.3	3~5	12	32/32	50
PG29A-H6-05	PG29	37	3~5	12.5	40/40	20
PG29A-H6-07	PG29	37	4~7	12.5	40/40	20
PG36A-H6-08	PG36	47	5~8	15	50/50	10
PG48A-H6-12	PG48	59.3	8~12	15	73/73	10
G3/8A-H6-02	G3/8	16.66	1~2.1	9	22/22	50
G1/2A-H6-03	G1/2	20.95	2~3.5	10	26/26	50
G1/2A-H6-04	G1/2	20.95	2~4	10	26/26	50
G3/4A-H6-05	G3/4	26.66	3~5	12	32/32	50
G1A-H6-05	G1	33.2	3~5	12.5	40/40	20
G1A-H6-07	G1	33.2	4~7	12.5	40/40	20
G1-1/4A-H6-08	G1-1/4	41.9	5~8	15	50/50	10
G2A-H6-12	G2	59.6	8~12	15	68/68	10
NPT3/8A-H6-02	NPT3/8	16.66	1~2.1	9	22/22	50
NPT1/2A-H6-03	NPT1/2	20.95	2~3.5	10	26/26	50
NPT1/2A-H6-04	NPT1/2	20.95	2~4	10	26/26	50
NPT3/4A-H6-05	NPT3/4	26.66	3~5	12	32/32	50
NPT1A-H6-05	NPT1	33.2	3~5	12.5	40/40	20
NPT1A-H6-07	NPT1	33.2	4~7	12.5	40/40	20
NPT1-1/4A-H6-08	NPT1-1/4	41.9	5~8	15	50/50	10
NPT2A-H6-12	NPT2	59.6	8~12	15	68/68	10

七孔/八孔防爆铜镀镍电缆防水接头

Multi hole brass explosion-proof cable gland

产品材料: 黄铜镀镍

LAND 蓝江

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

防爆标准: Ex eb IIC Gb/Ex tb IIIC Db

设计特点: 采用加厚黄铜镀镍配合三元乙丙橡胶制成,

多孔密封圈分体设计, 防护等级高, 抗拉力强, 可以

同时锁紧多根电缆而保持密封状态

应用场景: 电气, 船舶, 电机, 机械设备, 轨道交通

订购说明: 默认不附螺母, 配扁形密封垫片

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Explosion proof standard: Ex eb IIC Gb/Ex tb IIIC Db

Design Features: Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state

Application: Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: Default without nut, equipped with flat sealing gasket



七孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG25A-H7-04	M25×1.5	25	2~4	12	32/32	50
MG32A-H7-06	M32×1.5	32	4~6	12.5	40/40	20
MG40A-H7-08	M40×1.5	40	5~8	15	50/50	10
PG21A-H7-04	PG21	28.3	2~4	12	32/32	50
PG29A-H7-06	PG29	37	4~6	12.5	40/40	20
PG36A-H7-08	PG36	47	5~8	15	50/50	10
G3/4A-H7-04	G3/4	26.66	2~4	12	32/32	50
G1A-H7-06	G1	33.2	4~6	12.5	40/40	20
G1-1/4A-H7-08	G1-1/4	41.9	5~8	15	50/50	10
NPT3/4A-H7-04	NPT3/4	26.66	2~4	12	32/32	50
NPT1A-H7-06	NPT1	33.2	4~6	12.5	40/40	20
NPT1-1/4A-H7-08	NPT1-1/4	41.9	5~8	15	50/50	10


八孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG16A-H8-02	M16×1.5	16	1~2.1	9	22/22	50
MG18A-H8-02	M18×1.5	18	1~2.1	9	22/22	50
MG25A-H8-04	M25×1.5	25	2~4	12	32/32	50
MG32A-H8-05	M32×1.5	32	3~5	12.5	40/40	20
MG40A-H8-04	M40×1.5	40	3~4	15	50/50	10
MG40A-H8-06	M40×1.5	40	4~6	15	50/50	10
PG11A-H8-02	PG11	18.6	1~2.1	9	22/22	50
PG21A-H8-04	PG21	28.3	2~4	12	32/32	50
PG29A-H8-05	PG29	37	3~5	12.5	40/40	20
PG36A-H8-04	PG36	47	3~4	15	50/50	10
PG36A-H8-06	PG36	47	4~6	15	50/50	10
G3/8A-H8-02	G3/8	16.66	1~2.1	9	22/22	50
G3/4A-H8-04	G3/4	26.66	2~4	12	32/32	50
G1A-H8-05	G1	33.2	3~5	12.5	40/40	20
G1-1/4A-H8-04	G1-1/4	41.9	3~4	15	50/50	10
G1-1/4A-H8-06	G1-1/4	41.9	4~6	15	50/50	10
NPT3/8A-H8-02	NPT3/8	16.66	1~2.1	9	22/22	50
NPT3/4A-H8-04	NPT3/4	26.66	2~4	12	32/32	50
NPT1A-H8-05	NPT1	33.2	3~5	12.5	40/40	20
NPT1-1/4A-H8-04	NPT1-1/4	41.9	3~4	15	50/50	10
NPT1-1/4A-H8-06	NPT1-1/4	41.9	4~6	15	50/50	10

九孔型铜镀镍电缆防水接头

Nine holes Nickel Plated Brass cable gland

- 产品材料：黄铜镀镍
- 螺纹规格：M牙，PG牙，G(PF)牙，NPT牙
- 产品特性：符合CE，IP68、UL94V-2
- 温度测试：-40℃~105℃，短时可达120℃
- 设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆而保持密封状态
- 订购说明：默认不附螺母，配扁形密封垫片

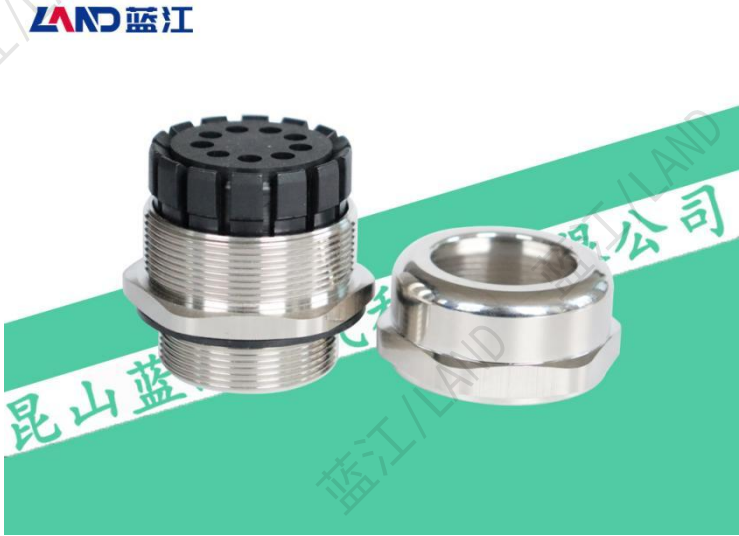

- Product materials:** Nickel Plated Brass
- Thread Standard:** Metric thread, PG thread, G thread, NPT thread
- Product Features:** Compliant with CE, IP68、UL94V-2
- Temperature test:** -40 ° C to 105 ° C, short-term 120 ° C
- Design Features:** Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state
- Ordering Tips:** Default without nut, equipped with flat sealing gasket


·九孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG40A-H9-05	M40×1.5	40	3~5	15	50/50	10
PG36A-H9-05	PG36	47	3~5	15	50/50	10
G1-1/4A-H9-05	G1-1/4	41.9	3~5	15	50/50	10
NPT1-1/4A-H9-05	NPT1-1/4	41.9	3~5	15	50/50	10

十孔型铜镀镍电缆防水接头

Ten holes Nickel Plated Brass cable gland

- 产品材料：黄铜镀镍
- 螺纹规格：M牙，PG牙，G(PF)牙，NPT牙
- 产品特性：符合CE，IP68、UL94V-2
- 温度测试：-40℃~105℃，短时可达120℃
- 设计特点：采用加厚黄铜镀镍配合三元乙丙橡胶制成，多孔密封圈分体设计，防护等级高，抗拉力强，可以同时锁紧多根电缆而保持密封状态
- 订购说明：默认不附螺母，配扁形密封垫片

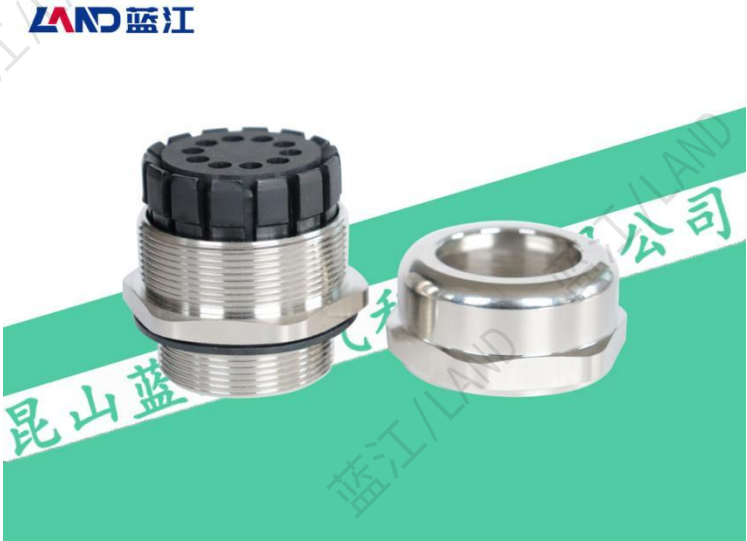

- Product materials:** Nickel Plated Brass
- Thread Standard:** Metric thread, PG thread, G thread, NPT thread
- Product Features:** Compliant with CE, IP68、UL94V-2
- Temperature test:** -40 ° C to 105 ° C, short-term 120 ° C
- Design Features:** Made of thickened brass nickel plating combined with EPDM rubber, with a porous sealing ring split design, high protection level, strong tensile strength, and the ability to lock multiple cables simultaneously to maintain a sealed state
- Ordering Tips:** Default without nut, equipped with flat sealing gasket

·十孔产品参数表/M/PG/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M/PG/G/NPT	Φ mm	Φ mm	GL mm	cap mm	pcs
MG40A-H10-05	M40×1.5	40	3~5	15	50/50	10
PG36A-H10-05	PG36	47	3~5	15	50/50	10
G1-1/4A-H10-05	G1-1/4	41.9	3~5	15	50/50	10
NPT1-1/4A-H10-05	NPT1-1/4	41.9	3~5	15	50/50	10

双锁紧铜镀镍电缆防水接头

Double locking brass nickel plated cable gland

产品材料: 默认黄铜镀镍

螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍配合三元乙丙橡胶及尼龙夹爪制成, 双层锁紧设计, 使其不紧能够有效密封电缆线, 还能锁紧电缆护套, 防护等级高, 抗拉力强

订购说明: NPT螺纹默认不附螺母, 配套O型密封圈, 部分型号需要定制, 具体交期咨询客户经理

Product materials: Nickel Plated Brass


Thread Standard: M、PG 、G(PF) 、NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass nickel plated with EPDM rubber and nylon clamps, with a double-layer locking design that effectively seals the cable and locks the cable sheath. It has a high protection level and strong tensile strength

Ordering Tips: NPT thread does not come with a nut by default and comes with an O-ring seal. Some models require customization, please consult the customer manager for specific delivery time

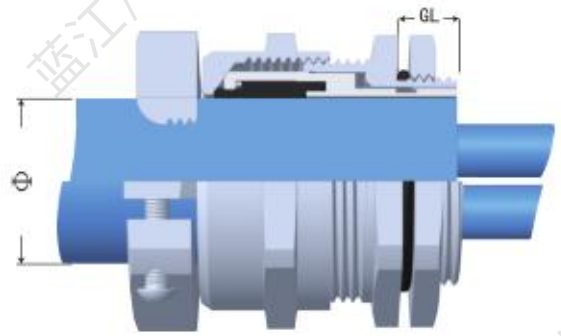

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SJ-M12-08	M12×1.5	12	4~8	6	14/16	50
SJ-M16-08	M16×1.5	16	4~8	7	17/18	50
SJ-M16-10	M16×1.5	16	5~10	7	20/20	50
SJ-M18-10	M18×1.5	18	5~10	7	20/20	50
SJ-M20-12	M20×1.5	20	6~12	7	22/22	50
SJ-M20-14	M20×1.5	20	8~14	7	24/24	50
SJ-M22-14	M22×1.5	22	8~14	8	24/24	50
SJ-M24-14	M24×1.5	24	8~14	8	24/27	50
SJ-M25-14	M25×1.5	25	8~14	8	24/27	50
SJ-M25-18	M25×1.5	25	13~18	8	30/30	50
SJ-M27-18	M27×2.0	27	13~18	8	30/30	20
SJ-M30-18	M30×2.0	30	13~18	8	30/32	20
SJ-M32-25	M32×1.5	32	18~25	9	40/40	20
SJ-M36-25	M36×2.0	36	18~25	9	40/40	20
SJ-M40-30	M40×1.5	40	22~30	10	45/45	10
SJ-M40-32	M40×1.5	40	24~32	10	50/50	10
SJ-M48-32	M48×2.0	48	24~32	10	50/52	10
SJ-M50-38	M50×1.5	50	30~38	12	57/55	5
SJ-M60-44	M60×2.0	60	37~44	12	64/64	5
SJ-M63-44	M63×1.5	63	37~44	12	64/68	5
SJ-PG7-08	PG7	12.5	4~8	7	17/17	50
SJ-PG9-08	PG9	15.2	4~8	7	17/17	50
SJ-PG11-10	PG11	18.6	5~10	7	20/20	50
SJ-PG13.5-12	PG13.5	20.5	6~12	7	22/22	50
SJ-PG16-14	PG16	22.5	8~14	8	24/24	50
SJ-PG21-18	PG21	28.3	13~18	8	30/30	50
SJ-PG25-20	PG25	29.8	15~20	8	30/32	20
SJ-PG29-25	PG29	37	18~25	9	40/40	20
SJ-PG36-32	PG36	47	24~32	10	50/50	10
SJ-PG42-38	PG42	54	30~38	10	58/58	5
SJ-PG48-44	PG48	59.8	37~44	12	64/64	5

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
SJ-G1/4-08	G1/4	13.15	4~8	6	14/16	50
SJ-G3/8-08	G3/8	16.65	4~8	7	17/18	50
SJ-G1/2-12	G1/2	20.95	6~12	8	22/22	50
SJ-G1/2-14	G1/2	20.95	8~14	8	22/24	50
SJ-G3/4-18	G3/4	26.44	13~18	8	30/30	50
SJ-G1-22	G1	33.24	16~22	9	34/36	20
SJ-G1-25	G1	33.24	18~25	9	34/40	20
SJ-G1-1/4-30	G1-1/4	41.91	23~30	10	45/45	10
SJ-G1-1/4-32	G1-1/4	41.91	26~32	10	45/50	10
SJ-G1-1/2-32	G1-1/2	47.8	25~32	10	50/52	5
SJ-G1-1/2-38	G1-1/2	47.8	32~38	10	50/58	5
SJ-G2-44	G2	59.61	37~44	12	64/64	5
SJ-NPT1/4-08	NPT1/4	13.15	4~8	6	14/16	50
SJ-NPT3/8-08	NPT3/8	16.65	4~8	7	17/18	50
SJ-NPT1/2-12	NPT1/2	20.95	6~12	8	22/22	50
SJ-NPT1/2-14	NPT1/2	20.95	8~14	8	22/24	50
SJ-NPT3/4-18	NPT3/4	26.44	13~18	8	30/30	50
SJ-NPT1-22	NPT1	33.24	16~22	9	34/36	20
SJ-NPT1-25	NPT1	33.24	18~25	9	34/40	20
SJ-NPT1-1/4-30	NPT1-1/4	41.91	23~30	10	45/45	10
SJ-NPT1-1/4-32	NPT1-1/4	41.91	26~32	10	45/50	10
SJ-NPT1-1/2-32	NPT1-1/2	47.8	25~32	10	50/52	5
SJ-NPT1-1/2-38	NPT1-1/2	47.8	32~38	10	50/58	5
SJ-NPT2-44	NPT2	59.61	37~44	12	64/64	5

接管式铜镀镍电缆防水接头

Pipe connected brass nickel plated cable gland

产品材料: 黄铜镀镍


螺纹规格: M牙, PG牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍制成, 配合三元乙丙密封圈, 使产品具有防护等级高, 耐候性强等特性, 另结构采用内外丝接管设计, 可与各类管件进行对接

订购说明: NPT螺纹默认不附螺母, 配扁形密封垫片, 部分型号需要定制

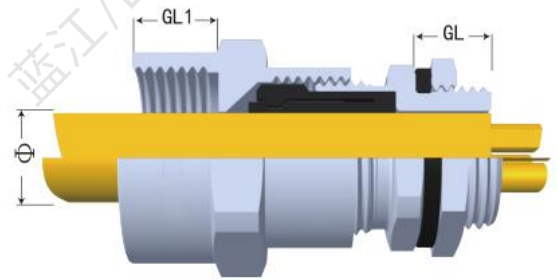

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of nickel plated brass and is equipped with a EPDM sealing ring, which gives the product high protection level and strong weather resistance. In addition, the structure adopts an inner and outer wire connection design, which can be docked with various types of pipe fittings

Ordering Tips: Default without nut, equipped with flat sealing gasket

产品参数表

蓝江产品型号	外螺纹	内螺纹	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M-thread	F-thread	Cable range	Thread length	Wrench Size	packaging
PN.	External	internal	Φ mm	GL mm	nut/cap mm	PCS
JGEX-M20A-12	M20×1.5	M20×1.5	7~12	12	24/24	20
JGEX-M20A-11	M20×1.5	M20×1.5	6~10.5	12	24/24	20
JGEX-M20A-09	M20×1.5	M20×1.5	5~9	12	24/24	20
JGEX-M25A-18	M25×1.5	M25×1.5	13~18	12	32/32	20
JGEX-M25A-16	M25×1.5	M25×1.5	11~16	12	32/32	20
JGEX-M25A-14	M25×1.5	M25×1.5	8~14	12	32/32	20
JGEX-M25A-10	M25×1.5	M25×1.5	6~10	12	32/32	20
JGEX-M32A-25	M32×1.5	M32×1.5	18~25	12.5	40/40	20
JGEX-M32A-22	M32×1.5	M32×1.5	16~22	12.5	40/40	20
JGEX-G1/2A-12	G1/2	G1/2	7~12	12	24/24	20
JGEX-G1/2A-11	G1/2	G1/2	6~10.5	12	24/24	20
JGEX-G1/2A-09	G1/2	G1/2	5~9	12	24/24	20
JGEX-G3/4A-18	G3/4	G3/4	13~18	12	32/32	20
JGEX-G3/4A-16	G3/4	G3/4	11~16	12	32/32	20
JGEX-G3/4A-14	G3/4	G3/4	8~14	12	32/32	20
JGEX-G3/4A-10	G3/4	G3/4	6~10	12	32/32	20
JGEX-G1A-25	G1	G1	18~25	12.5	40/40	20
JGEX-G1A-22	G1	G1	16~22	12.5	40/40	20
JGEX-NPT1/2A-12	G1/2	G1/2	7~12	12	24/24	20
JGEX-NPT1/2A-11	G1/2	G1/2	6~10.5	12	24/24	20
JGEX-NPT1/2A-09	G1/2	G1/2	5~9	12	24/24	20
JGEX-NPT3/4A-18	G3/4	G3/4	13~18	12	32/32	20
JGEX-NPT3/4A-16	G3/4	G3/4	11~16	12	32/32	20
JGEX-NPT3/4A-14	G3/4	G3/4	8~14	12	32/32	20
JGEX-NPT3/4A-10	G3/4	G3/4	6~10	12	32/32	20
JGEX-NPT1A-22	G1	G1	16~22	12.5	40/40	20
JGEX-NPT1A-25	G1	G1	18~25	12.5	40/40	20

防折弯铜镀镍电缆防水接头

Stress relief brass nickel plated cable gland

产品材料: 默认黄铜镀镍



螺纹规格: M牙, PG牙, G(PF)牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品采用黄铜镀镍, 三元乙丙橡胶, 结合不锈钢弹簧制成, 使其在设备工作过程中, 对电缆进行有效扭曲折弯保护, 防护等级高, 抗拉力强

订购说明: 默认标配螺母, O型密封圈, 部分型号需要定制, 具体交期咨询销售经理



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass plated with nickel, EPDM rubber, and combined with stainless steel springs to effectively twist and bend cables during equipment operation. It has a high protection level and strong tensile strength

Ordering Tips: Default standard includes nuts and O-ring seals, some models require customization, please consult the sales manager for specific delivery time

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG6B-P-03	M6×1.0	6	2.5~3	4	8/8	50
MG8B-P-04	M8×1.0	8	3~4	6	11/11	50
MG10B-P-06	M10×1.5	10	3~6.5	7	14/14	50
MG12B-P-06	M12×1.5	12	3~6.5	6	14/14	50
MG12B-P-08	M14×1.5	12	4~8	6	14/16	50
MG14B-P-08	M14×1.5	14	4~8	7	17/17	50
MG16B-P-08	M16×1.5	16	4~8	7	17/18	50
MG16B-P-10	M16×1.5	16	5~10	7	20/20	50
MG18B-P-10	M18×1.5	18	5~10	7	20/20	50
MG20B-P-12	M20×1.5	20	6~12	7	22/22	50
MG20B-P-14	M20×1.5	20	8~14	7	24/24	20
MG22B-P-14	M22×1.5	22	8~14	8	24/24	20
MG25B-P-16	M25×1.5	25	10~16	8	27/27	20
MG25B-P-18	M25×1.5	25	13~18	8	30/30	20
MG32B-P-22	M32×1.5	32	15~22	9	34/34	20
PG7B-P-06	PG7	12.5	3~6.5	6	14/14	50
PG9B-P-08	PG9	15.2	4~8	7	17/17	50
PG11B-P-10	PG11	18.6	5~10	7	20/20	50
PG13.5B-P-12	PG13.5	20.5	6~12	7	22/22	50
PG16B-P-14	PG16	22.5	8~14	8	24/24	20
PG21B-P-18	PG21	28.3	13~18	8	30/30	20
PG36B-P-32	PG36	47	24~32	10	50/50	10
G1/4B-P-06	G1/4	13.15	3~6.5	6	14/14	50
G3/8B-P-08	G3/8	16.65	4~8	7	17/17	50
G1/2B-P-12	G1/2	20.95	6~12	7	22/22	50
G3/4B-P-18	G3/4	26.44	13~18	8	30/30	20

90度弯角铜镀镍电缆防水接头

90 degree angled brass nickel plated cable gland

产品材料: 黄铜镀镍




螺纹规格: M牙, G(PF)牙

产品特性: 符合CE, IP68、UL94V-2

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍制成, 90度弯角穿线设计, 半通螺帽压紧密封, 使得电缆在需要转角过程中, 更加美观与便捷, 防护等级高, 抗拉力强

订购说明: NPT螺纹默认不附螺母, 部分型号需要定制

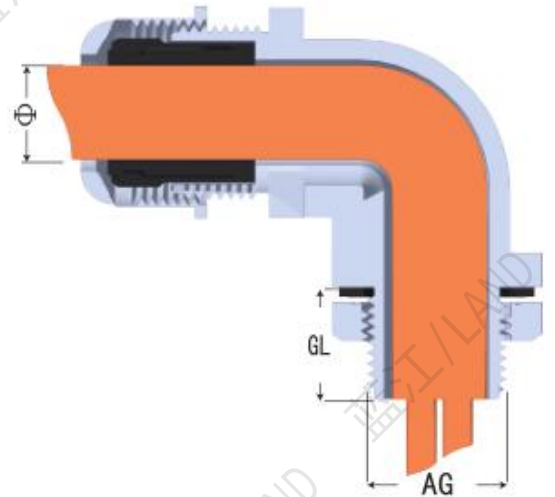

Product materials: Nickel Plated Brass

Thread Standard: M thread, G thread

Product Features: Compliant with CE, IP68、UL94V-2

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of nickel plated brass, with a 90 degree bending angle threading design and a semi threaded nut that is tightly sealed, making the cable more beautiful and convenient during the process of turning. It has a high protection level and strong tensile strength

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG12B-E-06	M12×1.5	12	3~6.5	6	14/14	20
MG12B-E-08	M12×1.5	14	4~8	6	14/16	20
MG14B-E-08	M14×1.5	14	4~8	7	17/17	20
MG16B-E-08	M16×1.5	16	4~8	7	17/18	20
MG16B-E-10	M16×1.5	16	5~10	7	20/20	20
MG18B-E-10	M18×1.5	18	5~10	7	20/20	20
MG20B-E-12	M20×1.5	20	6~12	8	22/22	20
MG25B-E-18	M25×1.5	25	13~18	8	30/30	20
MG32B-E-25	M32×1.5	32	18~25	9	40/40	20
MG40B-E-30	M40×1.5	40	22~30	10	45/45	20
MG50B-E-32	M50×1.5	50	24~32	10	57/55	20
MG63B-E-44	M63×1.5	63	37~44	12	64/68	20
G1/4B-E-06	G1/4	13.15	3~6.5	6	14/16	20
G3/8B-E-10	G3/8	16.65	6~10	7	17/18	20
G1/2B-E-12	G1/2	20.95	6~12	8	22/22	20
G3/4B-E-18	G3/4	26.44	13~18	8	30/30	20
G1B-E-22	G1	33.24	16~22	9	34/36	20
G1-1/4B-E-30	G1-1/4	41.91	23~30	10	45/45	20
G1-1/2B-E-32	G1-1/2	47.80	25~32	10	50/52	20
G2B-E-44	G2	59.61	37~44	12	64/64	20



硅胶铜镀镍电缆防水接头

Silicone Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G牙，NPT牙

产品特性：符合CE，IP68

温度测试：-20℃~180℃，短时可达220℃

设计特点：锥形硅胶密封圈设计，耐高温，防护等级高



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term 220 ° C

Design Features: Silicone sealing ring, high temperature resistance, high protection level

产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packaging
PN.	M-PG-G-NPT	mm	mm	nut/cap mm	PCS
MG12C-06	M12×1.5	4~6	6	16	100
MG14C-08	M14×1.5	5~8	7	18	100
MG16C-08	M16×1.5	5~8	7	18	100
MG18C-10	M18×1.5	8~10	7	20	100
MG20C-12	M20×1.5	10~12	8	22	50
PG7C-06	PG7	4~6	6	16	100
PG9C-08	PG9	6~8	7	18	100
PG11C-10	PG11	8~10	7	20	100
PG13.5C-12	PG13.5	10~12	8	22	50

耐高温铜镀镍电缆防水接头

High temperature Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68

温度测试：-20℃~180℃，短时可达220℃

设计特点：本产品采用黄铜镀镍与改性硅橡胶制成，

使其具有耐高温，防护等级高，抗拉力强等特性

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：NPT默认不附螺母，部分型号需要定制

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68

Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C

Design Features: This product is made of brass plated with nickel and modified silicone rubber, which gives it high temperature resistance, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit

Ordering Tips: NPT does not come with nuts by default, some models require customization



迫紧螺帽



夹紧爪




夹紧圈



基本躯体



垫片

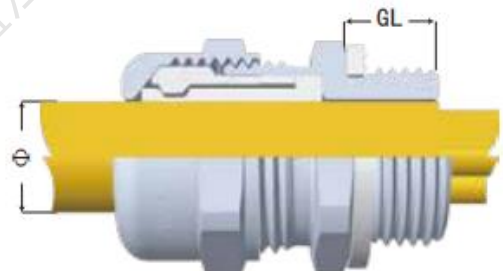

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-HT	M12×1.5	12	4~8	8	17/17	50
MG16A-08-HT	M16×1.5	16	4~8	8	18/18	50
MG16A-10-HT	M16×1.5	16	6~10	9	22/22	50
MG20A-14-HT	M20×1.5	20	8~14	10	26/26	50
MG20A-12-HT	M20×1.5	20	7~12	10	26/26	50
MG25A-18-HT	M25×1.5	25	13~18	12	32/32	50
MG25A-16-HT	M25×1.5	25	11~16	12	32/32	50
MG32A-25-HT	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22-HT	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30-HT	M40×1.5	40	24~30	15	50/50	10
MG50A-40-HT	M50×1.5	50	33~40	15	59/59	10
MG63A-45-HT	M63×1.5	63	38~45	15	68/68	10
PG7A-08-HT	PG7	12.5	4~8	8	17/17	50
PG9A-08-HT	PG9	15.2	4~8	8	18/18	50
PG11A-10-HT	PG11	18.6	6~10	9	22/22	50
PG13.5A-12-HT	PG13.5	20.5	7~12	10	24/24	50
PG16A-14-HT	PG16	22.5	8~14	10	26/26	50
PG16A-12-HT	PG16	22.5	7~12	10	26/26	50
PG21A-18-HT	PG21	28.3	13~18	12	32/32	50
PG21A-16-HT	PG21	28.3	11~16	12	32/32	50
PG29A-25-HT	PG29	37	18~25	12.5	40/40	20
PG29A-22-HT	PG29	37	16~22	12.5	40/40	20
PG36A-30-HT	PG36	47	24~30	15	50/50	10
PG42A-40-HT	PG42	54	33~40	15	59/59	10
PG48A-45-HT	PG48	59.3	38~45	15	68/68	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08-HT	G1/4	13.15	4~8	8	17/17	50
G3/8A-10-HT	G3/8	16.65	6~10	9	22/22	50
G1/2A-12-HT	G1/2	20.95	7~12	9.5	26/26	50
G1/2A-14-HT	G1/2	20.95	8~14	10	26/26	50
G3/4A-18-HT	G3/4	26.44	13~18	12	32/32	50
G3/4A-16-HT	G3/4	26.44	11~16	12	32/32	50
G1A-25-HT	G1	33.24	18~25	12.5	40/40	20
G1A-22-HT	G1	33.24	18~25	12.5	40/40	20
G1-1/4A-30-HT	G1-1/4	41.91	24~30	15	50/50	10
G1-1/2A-40-HT	G1-1/2	47.8	33~40	15	59/59	10
G2A-45-HT	G2	59.61	38~45	15	68/68	10
NPT1/4A-08-HT	NPT1/4	13.15	4~8	8	17/17	50
NPT3/8A-10-HT	NPT3/8	16.65	6~10	9	22/22	50
NPT1/2A-12-HT	NPT1/2	20.95	7~12	9.5	26/26	50
NPT1/2A-14-HT	NPT1/2	20.95	8~14	10	26/26	50
NPT3/4A-18-HT	NPT3/4	26.44	13~18	12	32/32	50
NPT3/4A-16-HT	NPT3/4	26.44	11~16	12	32/32	50
NPT1A-25-HT	NPT1	33.24	18~25	12.5	40/40	20
NPT1A-22-HT	NPT1	33.24	16~22	12.5	40/40	20
NPT1-1/4A-30-HT	NPT1-1/4	41.91	24~30	15	50/50	10
NPT1-1/2A-40-HT	NPT1-1/2	47.8	33~40	15	59/59	10
NPT2A-45-HT	NPT2	59.61	38~45	15	68/68	10

阻燃铜镀镍电缆防水接头

Flame retardant Nickel Plated Brass cable gland

产品材料：黄铜镀镍

螺纹规格：M牙，PG牙，G(PF)牙，NPT牙

产品特性：符合CE，IP68、UL94V-0

温度测试：-40℃~105℃，短时可达120℃

设计特点：本产品采用黄铜镀镍与改性阻燃橡胶制成，

使其具有防火阻燃，防护等级高，抗拉力强等特性

应用场景：电气，船舶，电机，机械设备，轨道交通

订购说明：NPT牙默认不附螺母，部分型号需要定制

LAND 蓝江



Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP68、UL94V-0

Temperature test: -40 ° C to 105 ° C, short-term 120 ° C

Design Features: This product is made of brass nickel plated and modified flame-retardant rubber, which gives it the characteristics of fire resistance, high protection level, and strong tensile strength

Application:Electrical, marine, electrical, mechanical equipment, rail transit, robots

Ordering Tips: NPT does not come with nuts by default, some models require customization



产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12A-08-V0	M12×1.5	12	4~8	8	17/17	50
MG16A-08-V0	M16×1.5	16	4~8	8	18/18	50
MG16A-10-V0	M16×1.5	16	6~10	9	22/22	50
MG20A-14-V0	M20×1.5	20	8~14	10	26/26	50
MG20A-12-V0	M20×1.5	20	7~12	10	26/26	50
MG25A-18-V0	M25×1.5	25	13~18	12	32/32	50
MG25A-16-V0	M25×1.5	25	11~16	12	32/32	50
MG32A-25-V0	M32×1.5	32	18~25	12.5	40/40	20
MG32A-22-V0	M32×1.5	32	16~22	12.5	40/40	20
MG40A-30-V0	M40×1.5	40	24~30	15	50/50	10
MG50A-40-V0	M50×1.5	50	33~40	15	59/59	10
MG63A-45-V0	M63×1.5	63	38~45	15	68/68	10
PG7A-08-V0	PG7	12.5	4~8	8	17/17	50
PG9A-08-V0	PG9	15.2	4~8	8	18/18	50
PG11A-10-V0	PG11	18.6	6~10	9	22/22	50
PG13.5A-12-V0	PG13.5	20.5	7~12	10	24/24	50
PG16A-14-V0	PG16	22.5	8~14	10	26/26	50
PG16A-12-V0	PG16	22.5	7~12	10	26/26	50
PG21A-18-V0	PG21	28.3	13~18	12	32/32	50
PG21A-16-V0	PG21	28.3	11~16	12	32/32	50
PG29A-25-V0	PG29	37	18~25	12.5	40/40	20
PG29A-22-V0	PG29	37	16~22	12.5	40/40	20
PG36A-30-V0	PG36	47	24~30	15	50/50	10
PG42A-40-V0	PG42	54	33~40	15	59/59	10
PG48A-45-V0	PG48	59.3	38~45	15	68/68	10

产品参数表/G(PF)/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
G1/4A-08-V0	G1/4	13.15	4~8	8	17/17	50
G3/8A-10-V0	G3/8	16.65	6~10	9	22/22	50
G1/2A-12-V0	G1/2	20.95	7~12	9.5	26/26	50
G1/2A-14-V0	G1/2	20.95	8~14	10	26/26	50
G3/4A-18-V0	G3/4	26.44	13~18	12	32/32	50
G3/4A-16-V0	G3/4	26.44	11~16	12	32/32	50
G1A-25-V0	G1	33.24	18~25	12.5	40/40	20
G1A-22-V0	G1	33.24	18~25	12.5	40/40	20
G1-1/4A-30-V0	G1-1/4	41.91	24~30	15	50/50	10
G1-1/2A-40-V0	G1-1/2	47.8	33~40	15	59/59	10
G2A-45-V0	G2	59.61	38~45	15	68/68	10
NPT1/4A-08-V0	NPT1/4	13.15	4~8	8	17/17	10
NPT3/8A-10-V0	NPT3/8	16.65	6~10	9	22/22	50
NPT1/2A-12-V0	NPT1/2	20.95	7~12	9.5	26/26	50
NPT1/2A-14-V0	NPT1/2	20.95	8~14	10	26/26	50
NPT3/4A-18-V0	NPT3/4	26.44	13~18	12	32/32	50
NPT3/4A-16-V0	NPT3/4	26.44	11~16	12	32/32	50
NPT1A-25-V0	NPT1	33.24	18~25	12.5	40/40	50
NPT1A-22-V0	NPT1	33.24	16~22	12.5	40/40	20
NPT1-1/4A-30-V0	NPT1-1/4	41.91	24~30	15	50/50	20
NPT1-1/2A-40-V0	NPT1-1/2	47.8	33~40	15	59/59	10
NPT2A-45-V0	NPT2	59.61	38~45	15	68/68	10

DEX2系列-单密封铜镀镍铠装防爆填料函

DEX2 Explosion-proof Nickel Plated Brass Armored cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品胶泥型单密封出线设计, 内部为


铠装夹紧装置, 采用单密封结构, 具有防水防爆, 防

护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: NPT默认不附螺母, 部分型号需要定制

LAND 蓝江

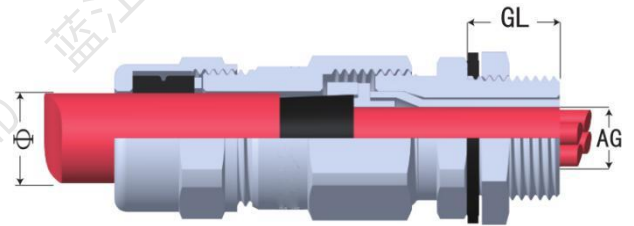

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP66, SYEx, ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a single sealed lead out design with adhesive mud type, and an armored clamping device inside. It adopts a single sealed structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
DEX2-M20-16	M20×1.5	12~16	6~10	15	20
DEX2-M20-20	M20×1.5	15~20	11~15	15	20
DEX2-M25-20	M25×1.5	15~20	11~15	15	20
DEX2-M25-25	M25×1.5	17~25	11~15	15	20
DEX2-M32-25	M32×1.5	17~25	15~20	15	10
DEX2-M32-25	M32×1.5	23~32	15~20	15	10
DEX2-M40-32	M40×1.5	23~32	18~26	15	10
DEX2-M50-40	M50×1.5	34~40	28~32	15	5
DEX2-M63-50	M63×1.5	44~50	35~45	15	5
DEX2-G1/2-16	G1/2	12~16	6~10	15	20
DEX2-G1/2-20	G1/2	15~20	11~15	15	20
DEX2-G3/4-20	G3/4	15~20	11~15	15	20
DEX2-G3/4-25	G3/4	17~25	11~15	15	20
DEX2-G1-25	G1	17~25	15~20	15	10
DEX2-G1-32	G1	23~32	15~20	15	10
DEX2-G1-1/4-32	G1-1/4	23~32	18~26	15	10
DEX2-G1-1/2-40	G1-1/2	34~40	28~32	15	5
DEX2-G2-50	G2	44~50	35~45	15	5
DEX2-NPT1/2-16	NPT1/2	12~16	6~10	15	20
DEX2-NPT1/2-20	NPT1/2	15~20	11~15	15	20
DEX2-NPT3/4-20	NPT3/4	15~20	11~15	15	20
DEX2-NPT3/4-25	NPT3/4	17~25	11~15	15	20
DEX2-NPT1-25	NPT1	17~25	15~20	15	10
DEX2-NPT1-32	NPT1	23~32	15~20	15	10
DEX2-NPT1-1/4-32	NPT1-1/4	23~32	18~26	15	10
DEX2-NPT1-1/2-40	NPT1-1/2	34~40	28~32	15	5
DEX2-NPT2-50	NPT2	44~50	35~45	15	5

SKZEX系列-双密封铜镀镍铠装防爆填料函

SKZEX Explosion-proof Nickel Plated Brass Armored cable gland

产品材料: 黄铜镀镍

螺纹规格: M牙, G(PF)牙, NPT牙


产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品双密封圈出线锁紧设计, 内部为铠装夹紧装置, 采用双密封结构, 具有防水防爆, 防护等级高, 抗拉力强等特点

应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: NPT默认不附螺母, 部分型号需要定制

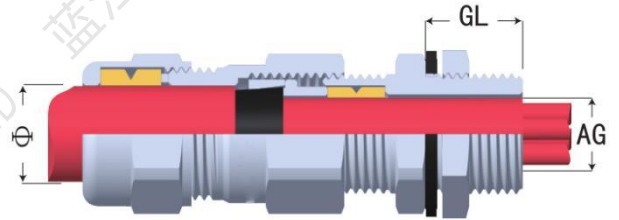

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, G (PF) thread, NPT thread

Product Features: Compliant with CE、IP66、SYEx、ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product features a dual sealing ring locking design for the outgoing line, with an armored clamping device inside. It adopts a dual sealing structure and has the characteristics of waterproof, explosion-proof, high protection level, and strong tensile strength

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: NPT does not come with nuts by default, some models require customization

产品参数表

蓝江产品型号	螺纹规格	电缆范围/Cable range		螺纹长度	包装
		带铠电缆	内部电缆		
Product model	Thread size	Armored cable	Internal cable	Thread L	packaging
PN.	Metric	Φ mm	AG mm	GL mm	PCS
SKZEX-M20-16	M20×1.5	12~16	6~10	15	20
SKZEX-M20-20	M20×1.5	15~20	11~15	15	20
SKZEX-M25-20	M25×1.5	15~20	11~15	15	20
SKZEX-M25-25	M25×1.5	17~25	11~15	15	20
SKZEX-M32-25	M32×1.5	17~25	15~20	15	10
SKZEX-M32-25	M32×1.5	23~32	15~20	15	10
SKZEX-M40-32	M40×1.5	23~32	18~26	15	10
SKZEX-M50-40	M50×1.5	34~40	28~32	15	5
SKZEX-M63-50	M63×1.5	44~50	35~45	15	5
SKZEX-G1/2-16	G1/2	12~16	6~10	15	20
SKZEX-G1/2-20	G1/2	15~20	11~15	15	20
SKZEX-G3/4-20	G3/4	15~20	11~15	15	20
SKZEX-G3/4-25	G3/4	17~25	11~15	15	20
SKZEX-G1-25	G1	17~25	15~20	15	10
SKZEX-G1-32	G1	23~32	15~20	15	10
SKZEX-G1-1/4-32	G1-1/4	23~32	18~26	15	10
SKZEX-G1-1/2-40	G1-1/2	34~40	28~32	15	5
SKZEX-G2-50	G2	44~50	35~45	15	5
SKZEX-NPT1/2-16	NPT1/2	12~16	6~10	15	20
SKZEX-NPT1/2-20	NPT1/2	15~20	11~15	15	20
SKZEX-NPT3/4-20	NPT3/4	15~20	11~15	15	20
SKZEX-NPT3/4-25	NPT3/4	17~25	11~15	15	20
SKZEX-NPT1-25	NPT1	17~25	15~20	15	10
SKZEX-NPT1-32	NPT1	23~32	15~20	15	10
SKZEX-NPT1-1/4-32	NPT1-1/4	23~32	18~26	15	10
SKZEX-NPT1-1/2-40	NPT1-1/2	34~40	28~32	15	5
SKZEX-NPT2-50	NPT2	44~50	35~45	15	5

EXd1系列-隔爆铜镀镍填料函

EXd1 Explosion-proof Nickel Plated Brass cable gland

产品材料: 黄铜镀镍



螺纹规格: M牙, G(PF)牙, NPT牙

产品特性: 符合CE, IP66, SYEx, ATEX

温度测试: -40°C~105°C, 短时可达120°C

设计特点: 本款产品为黄铜镀镍配合加长硅胶密封圈制成使用压紧帽使电缆锁紧, 具有隔爆性能, 广泛应用于各种防爆场所, 默认配备防水O型密封圈。



应用场景: 防爆电气, 石油化工, 防爆电机, 机械设备

订购说明: 默认不附螺母, 配密封O型圈, 部分型号需定制

Product materials: Nickel Plated Brass

Thread Standard: Metric thread, PG thread, G (PF) thread, NPT thread

Product Features: Compliant with CE, IP66, SYEx, ATEX

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: This product is made of brass nickel plated with an extended silicone sealing ring. It uses a compression cap to lock the cable and has explosion-proof performance. It is widely used in various explosion-proof places and is equipped with a waterproof O-ring by default.

Application: Explosion proof electrical, petrochemical, explosion-proof motors, mechanical equipment, etc

Ordering Tips: Default without nut, equipped with sealing O-ring, Some models require customization


产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
Exd1-M20-14	M20×1.5	20	8~14	15	26	20
Exd1-M25-16	M25×1.5	25	8~16	15	30	20
Exd1-M25-20	M25×1.5	25	10~20	15	38	20
Exd1-M32-20	M32×1.5	32	10~20	18	38	10
Exd1-M32-25	M32×1.5	32	10~25	18	46	10
Exd1-M40-25	M40×1.5	40	10~25	18	46	5
Exd1-M40-32	M40×1.5	40	14~32	18	50	5
Exd1-M50-32	M50×1.5	50	14~32	18	50	5
Exd1-M50-41	M50×1.5	50	17~41	18	62	5
Exd1-M63-41	M63×1.5	63	17~41	18	62	1
Exd1-G1/2-14	G1/2	20.95	8~14	15	26	20
Exd1-G3/4-16	G3/4	26.44	8~16	15	30	20
Exd1-G3/4-20	G3/4	26.44	10~20	15	38	20
Exd1-G1-20	G1	33.2	10~20	18	38	10
Exd1-G1-25	G1	33.1	10~25	18	46	10
Exd1-G1-1/4-25	G1-1/4	41.9	10~25	18	46	5
Exd1-G1-1/4-32	G1-1/4	41.9	14~32	18	50	5
Exd1-G1-1/2-32	G1-1/2	47.8	14~32	18	50	5
Exd1-G1-1/2-41	G1-1/2	47.8	17~41	18	62	5
Exd1-G2-41	G2	59.6	17~41	18	62	1
Exd1-NPT1/2-14	NPT1/2	20.95	8~14	15	26	20
Exd1-NPT3/4-16	NPT3/4	26.44	8~16	15	30	20
Exd1-NPT3/4-20	NPT3/4	26.44	10~20	15	38	20
Exd1-NPT1-20	NPT1	33.5	10~20	18	38	10
Exd1-NPT1-25	NPT1	33.5	10~25	18	46	10
Exd1-NPT1-1/4-25	NPT1-1/4	42	10~25	18	46	5
Exd1-NPT1-1/4-32	NPT1-1/4	42	14~32	18	50	5
Exd1-NPT1-1/2-32	NPT1-1/2	48	14~32	18	50	5
Exd1-NPT1-1/2-41	NPT1-1/2	48	17~41	18	62	5
Exd1-NPT2-41	NPT2	60	17~41	18	62	1

EXd2系列-耐温防水铜镀镍填料函

EXd2 - High temperature waterproof brass nickel plated filler cable gland

- 产品材料：黄铜镀镍
- 产品特性：符合CE，IP68
- 温度测试：-20℃~180℃，短时可达220℃
- 设计特点：锥形硅胶密封圈设计，内压密封锁紧电缆
- 订购说明：默认不附螺母，配密封O型圈

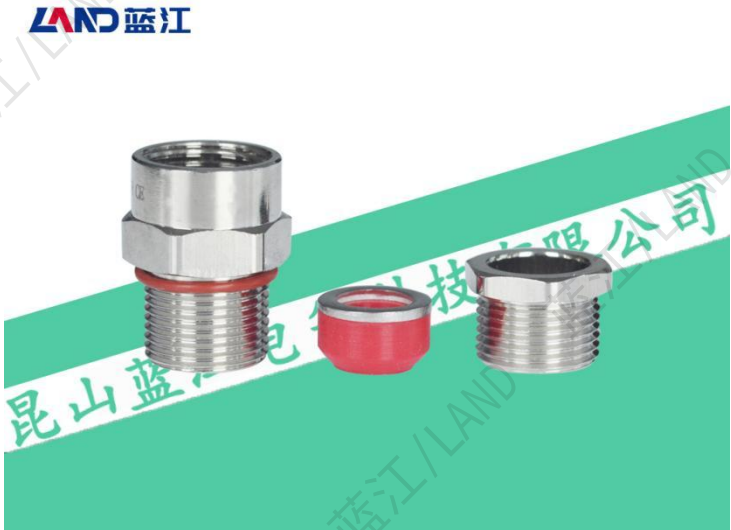

- Product materials: Nickel Plated Brass
- Product Features: Compliant with CE, IP68
- Temperature test: -20 ° C to 180 ° C, short-term up to 220 ° C
- Design Features: Internal pressure conical silicone sealing ring can effectively lock cables and provide waterproof sealing
- Ordering Tips: Default without nut, equipped with sealing O-ring, Some models require customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
Exd2-M20-14	M20×1.5	20	8~14	15	30	50
Exd2-M20-12	M20×1.5	20	7~12	15	26	50
Exd2-M20-08	M20×1.5	20	4~8	15	26	50
Exd2-M20-06	M20×1.5	20	3~6	15	26	50
Exd2-G1/2-14	G1/2	20.95	8~14	15	30	50
Exd2-G1/2-12	G1/2	20.95	7~12	15	30	50
Exd2-G1/2-08	G1/2	20.95	4~8	15	26	50
Exd2-G1/2-06	G1/2	20.95	3~6	15	26	50
Exd2-NPT1/2-14	NPT1/2	20.95	8~14	15	30	50
Exd2-NPT1/2-12	NPT1/2	20.95	7~12	15	26	50
Exd2-NPT1/2-08	NPT1/2	20.95	4~8	15	26	50
Exd2-NPT1/2-06	NPT1/2	20.95	3~6	15	26	50

TJ铜镀镍船用夹紧填料函

TJ Brass nickel plated filler cable gland


产品材料：黄铜镀镍

产品特性：符合CE，IP65

温度测试：-40℃~105℃，短时可达120℃

设计特点：压紧式密封设计，铜镀镍船用填料函

订购说明：本款为半铜制填料函，全铜需要定制

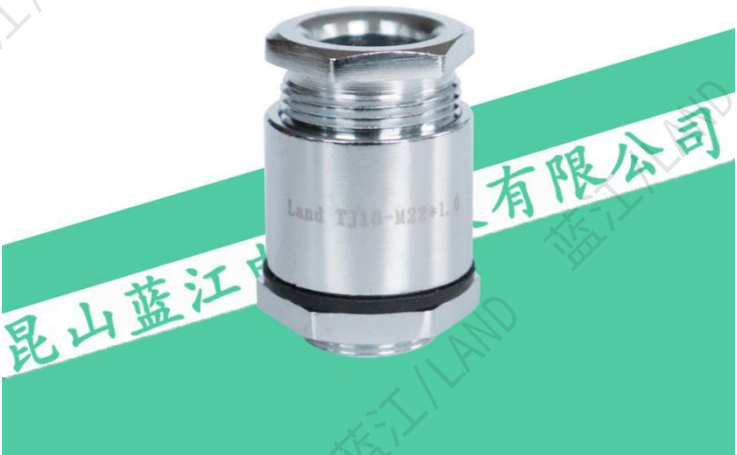

Product materials: Nickel Plated Brass

Product Features: Compliant with CE, IP65

Temperature test: -40 ° C to 105 ° C, short-term up to 120 ° C

Design Features: Compact sealing design, copper nickel plated marine filler cable gland

Ordering Tips: This is a semi copper stuffing box, all copper requires customization

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	M Thread	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	M	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
TJ08-M14*1.0	M14×1.0	14	5~7	10	19/19	50
TJ13-M18*1.0	M18×1.0	18	9~12	11	24/22	50
TJ16-M22*1.0	M22×1.0	22	11~15	11	30/28	50
TJ19-M27*1.5	M27×1.5	27	14~18	14	34/32	20
TJ24-M30*1.5	M30×1.5	30	18~23	14	38/38	20
TJ28-M36*2.0	M36×2.0	36	23~27	14	45/45	20
TJ34-M42*2.0	M42×2.0	42	27~33	14	50/50	10
TJ42-M52*2.0	M52×2.0	52	33~41	14	62/60	10
TJ50-M58*2.0	M58×2.0	58	33~49	20	65/70	5
TJ58-M68*2.0	M68×2.0	68	33~57	20	85/80	5

标准铝制电缆防水接头

Standard Aluminum cable gland

材料: 6061铝, 密封件EPDM, 夹紧爪尼龙


检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片

LAND 蓝江

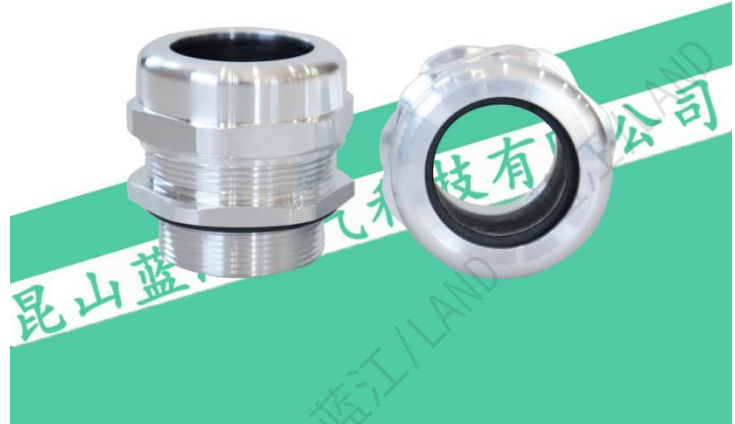

Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature: - 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, Dustproof and surface treatment can choose between primary color or blackening treatment, with a beautiful appearance Observation, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket



迫紧螺母



夹紧爪




夹紧圈



基本躯体



垫片

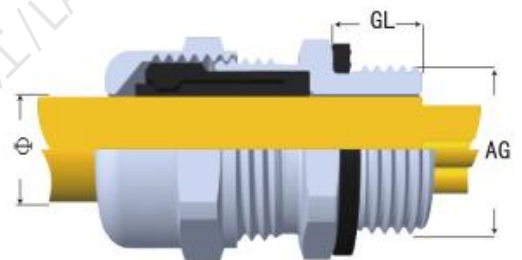

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
MG12-08-AL	M12×1.5(1)	12	4~8	9	15/17	50
MG12-05-AL	M12×1.5(1)	12	3~5.5	9	15/17	50
MG14-08-AL	M14×1.5	14	4~8	9	17/17	50
MG14-05-AL	M14×1.5	14	3~5.5	9	17/17	50
MG16-10-AL	M16×1.5(1)	16	6~10	9.5	20/21	50
MG16-07-AL	M16×1.5(1)	16	4~7	9.5	20/21	50
MG18-10-AL	M18×1.5	18	6~10	9.5	21/21	50
MG18-07-AL	M18×1.5	18	4~7	9.5	21/21	50
MG20-14-AL	M20×1.5	20	8~14	12	24/26	50
MG20-11-AL	M20×1.5	20	7~11	12	24/26	50
MG20-09-AL	M20×1.5	20	5~9	12	24/26	50
MG20-06-AL	M20×1.5	20	3~6.5	12	24/26	50
MG20S-12-AL	M20×1.5	20	7~12	12	24/24	50
MG20S-11-AL	M20×1.5	20	6~11	12	24/24	50
MG20S-09-AL	M20×1.5	20	5~9	12	24/24	50
MG22-14-AL	M22×1.5	22	8~14	12	26/26	50
MG24-14-AL	M24×1.5	24	8~14	10.5	28/26	50
MG25-18-AL	M25×1.5	25	13~18	12	30/31	50
MG25-16-AL	M25×1.5	25	12~16	12	30/31	50
MG25-14-AL	M25×1.5	25	8~14	12	30/31	50
MG25-10-AL	M25×1.5	25	6~10	12	30/31	50
MG25-08-AL	M25×1.5	25	4~8	12	30/31	50
MG27-18-AL	M27×1.5(2)	27	13~18	12	30/31	50
MG30-18-AL	M30×1.5(2)	30	13~18	12.5	34/31	50
MG32-25-AL	M32×1.5	32	18~25	12.5	38/40	20
MG32-22-AL	M32×1.5	32	16~22	12.5	38/40	20
MG36-25-AL	M36×1.5(2)	36	18~25	13	42/40	20
MG40-31-AL	M40×1.5(2)	40	25~31	14	48/50	10
MG40-25-AL	M40×1.5(2)	40	18~25	14	48/50	10
MG42-31-AL	M42×2.0	42	25~31	15	48/50	10
MG48-31-AL	M48×2.0	48	25~31	15	58/50	10
MG50-41-AL	M50×1.5	50	33~41	15	58/60	10
MG50-33-AL	M50×1.5	50	25~33	15	58/60	10
MG63-54-AL	M63×1.5	63	46~54	15	71/76	10
MG63-46-AL	M63×1.5	63	38~46	15	71/76	10
MG63-35-AL	M63×1.5	63	28~35	15	71/76	10
MG63S-44-AL	M63×1.5	63	36~44	15	71/65	10

产品参数表/PG

蓝江产品型号	螺纹尺寸	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	PG	AG Φ mm	mm	mm	nut/cap mm	PCS
PG7-08-AL	PG7	12.5	4~8	9	15/17	50
PG7-05-AL	PG7	12.5	3~5.5	9	15/17	50
PG7-03-AL	PG7	12.5	2~3.2	9	15/17	50
PG9-08-AL	PG9	15.2	4~8	9	17/17	50
PG9-05-AL	PG9	15.2	3~5.5	9	17/17	50
PG9-03-AL	PG9	15.2	2~3.2	9	17/17	50
PG11-10-AL	PG11	18.6	6~10	9.5	21/21	50
PG11-07-AL	PG11	18.6	4~7	9.5	21/21	50
PG11-05-AL	PG11	18.6	3~5	9.5	21/21	50
PG11-04-AL	PG11	18.6	2~4	9.5	21/21	50
PG13.5-12-AL	PG13.5	20.4	7~12	10.5	24/24	50
PG13.5-11-AL	PG13.5	20.4	6~11	10.5	24/24	50
PG13.5-09-AL	PG13.5	20.4	5~9	10.5	24/24	50
PG16-14-AL	PG16	22.5	8~14	12	26/26	50
PG16-11-AL	PG16	22.5	7~11	12	26/26	50
PG16-06-AL	PG16	22.5	3~6.5	12	26/26	50
PG19-14-AL	PG19	23.8	8~14	10.5	28/26	50
PG21-18-AL	PG21	28.3	13~18	12	32/31	50
PG21-16-AL	PG21	28.3	12~16	12	32/31	50
PG21-14-AL	PG21	28.3	8~14	12	32/31	50
PG21-10-AL	PG21	28.3	6~10	12	32/31	50
PG21-08-AL	PG21	28.3	4~8	12	32/31	50
PG21-06-AL	PG21	28.3	3~6	12	32/31	50
PG25-18-AL	PG25	29.8	13~18	12.5	34/31	50
PG29-25-AL	PG29	37	18~25	12.5	40/40	20
PG29-22-AL	PG29	37	17~22	12.5	40/40	20
PG36-31-AL	PG36	47	25~31	15	58/50	10
PG36-25-AL	PG36	47	18~25	15	58/50	10
PG42-41-AL	PG42	54	33~41	15	60/60	10
PG42-33-AL	PG42	54	25~33	15	60/60	10
PG48-44-AL	PG48	59.3	36~44	15	71/65	10
PG48-54-AL	PG48	59.3	44~54	15	71/76	10
PG63-54-AL	PG63	72	47~54	15	76/76	10

产品参数表/G(PF)

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	G (PF)	AG Φ mm	mm	mm	nut/cap mm	PCS
G1/4-08-AL	G1/4	13.15	4~8	9	17/17	50
G1/4-05-AL	G1/4	13.15	3~5.5	9	17/17	50
G1/4-03-AL	G1/4	13.15	2~3.2	9	17/17	50
G3/8-10-AL	G3/8	16.66	6~10	9.5	21/21	50
G3/8-07-AL	G3/8	16.66	4~7	9.5	21/21	50
G3/8-05-AL	G3/8	16.66	3~5	9.5	21/21	50
G3/8-04-AL	G3/8	16.66	2~4.3	9.5	21/21	50
G1/2-14-AL	G1/2	20.99	8~14	12	24/26	50
G1/2-12-AL	G1/2	20.99	7~12	12	24/24	50
G1/2-11-AL	G1/2	20.99	6~11	12	24/24	50
G1/2-09-AL	G1/2	20.99	5~9	12	24/24	50
G3/4-18-AL	G3/4	26.44	13~18	12	30/31	50
G3/4-16-AL	G3/4	26.44	12~16	12	30/31	50
G3/4-14-AL	G3/4	26.44	8~14	12	30/31	50
G3/4-10-AL	G3/4	26.44	6~10	12	30/31	50
G3/4-08-AL	G3/4	26.44	4~8	12	30/31	50
G3/4-06-AL	G3/4	26.44	3~6	12	30/31	50
G1-25-AL	G1	33.25	18~25	15	38/40	20
G1-22-AL	G1	33.25	17~22	15	38/40	20
G1-1/4-31-AL	G1-1/4	41.91	25~31	15	48/50	10
G1-1/4-25-AL	G1-1/4	41.91	18~25	15	48/50	10
G1-1/2-31-AL	G1-1/2	47.8	25~31	15	55/50	10
G1-1/2-25-AL	G1-1/2	47.8	18~25	15	55/50	10
G1-1/2-41-AL	G1-1/2	47.8	33~41	15	55/60	10
G1-1/2-33-AL	G1-1/2	47.8	25~33	15	55/60	10
G2-44-AL	G2	59.61	36~44	15	71/65	1
G2-54-AL	G2	59.61	47~54	15	71/76	1
G2-46-AL	G2	59.61	40~46	15	71/76	1
G2-35-AL	G2	59.61	28~35	15	71/76	1
G2-1/2-66-AL	G2-1/2	75.18	60~66	15.5	80/85	1
G3-77-AL	G3	87.88	70~77	20	95/103	1

产品参数表/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	NPT	AG φ mm	mm	mm	nut/cap mm	PCS
NPT1/4-08-AL	NPT1/4	13.15	4~8	9	17	50
NPT1/4-05-AL	NPT1/4	13.15	3~5.5	9	17	50
NPT1/4-03-AL	NPT1/4	13.15	2~3.2	9	17	50
NPT3/8-10-AL	NPT3/8	17.05	6~10	10	21	50
NPT3/8-07-AL	NPT3/8	17.05	4~7	10	21	50
NPT3/8-05-AL	NPT3/8	17.05	3~5	10	21	50
NPT3/8-04-AL	NPT3/8	17.05	2~4.3	10	21	50
NPT1/2-14-AL	NPT1/2	20.99	8~14	13	26	50
NPT1/2-12-AL	NPT1/2	20.99	7~12	11	24	50
NPT1/2-11-AL	NPT1/2	20.99	6~11	11	24	50
NPT1/2-09-AL	NPT1/2	20.99	5~9	11	24	50
NPT3/4-18-AL	NPT3/4	26.56	13~18	13	31	50
NPT3/4-16-AL	NPT3/4	26.56	12~16	13	31	50
NPT3/4-14-AL	NPT3/4	26.56	8~14	13	31	50
NPT3/4-10-AL	NPT3/4	26.56	6~10	13	31	50
NPT3/4-08-AL	NPT3/4	26.56	4~8	13	31	50
NPT3/4-06-AL	NPT3/4	26.56	3~6	13	31	50
NPT1-25-AL	NPT1	33.23	18~25	15	40	20
NPT1-22-AL	NPT1	33.23	17~22	15	40	20
NPT1-1/4-31-AL	NPT1-1/4	41.98	25~31	15	50	10
NPT1-1/4-25-AL	NPT1-1/4	41.98	18~25	15	50	10
NPT1-1/2-31-AL	NPT1-1/2	48.05	25~31	15	50	10
NPT1-1/2-25-AL	NPT1-1/2	48.05	18~25	15	50	10
NPT1-1/2-41-AL	NPT1-1/2	48.05	33~41	15	60	10
NPT1-1/2-33-AL	NPT1-1/2	48.05	25~33	15	60	10
NPT2-44-AL	NPT2	60.09	36~44	15	65	10
NPT2-54-AL	NPT2	60.09	44~54	15	76	10
NPT2-46-AL	NPT2	60.09	38~46	15	76	10
NPT2-35-AL	NPT2	60.09	28~35	15	76	10
NPT2-1/2-66-AL	NPT2-1/2	75.18	60~66	15.5	85	1
NPT3-77-AL	NPT3	87.88	70~77	20	103	1

扁孔铝制电缆防水接头

Flat hole aluminum cable gland

材料: 6061铝, 密封件EPDM, 夹紧爪尼龙

检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 可以锁紧扁电缆与伴热带, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片

LAND 蓝江




Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, dustproof, surface treatment can choose original color or blackening treatment, can lock flat cables and heat tracing belts, beautiful appearance, easy to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket

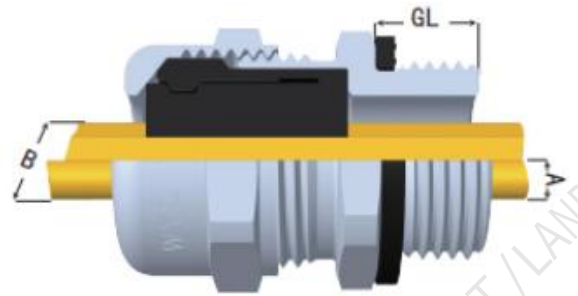

产品参数表/M/PG

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG ϕ mm	ϕ mm	GL mm	nut/cap mm	PCS
MG20S-0508-AL	M20×1.5	20	5*8	12	24/24	50
MG20S-0612-AL	M20×1.5	20	6*12	12	24/24	50
MG20-0410-AL	M20×1.5	20	4*10	12	24/26	50
MG20-0612-AL	M20×1.5	20	6*12	12	24/26	50
MG20-0814-AL	M20×1.5	20	8*14	12	24/26	50
MG22-0410-AL	M22×1.5	22	4*10	12	26/26	50
MG22-0612-AL	M22×1.5	22	6*12	12	26/26	50
MG22-0814-AL	M22×1.5	22	8*14	12	26/26	50
MG24-0410-AL	M24×1.5	24	4*10	10.5	28/26	50
MG24-0612-AL	M24×1.5	24	6*12	10.5	28/26	50
MG24-0814-AL	M24×1.5	24	8*14	10.5	28/26	50
MG25-0511-AL	M25×1.5	25	5*11	12	30/31	50
MG25-0614-AL	M25×1.5	25	7*14	12	30/31	50
MG32-0519-AL	M32×1.5	32	5*19	12.5	38/40	20
MG36-0519-AL	M36×1.5 (2)	36	5*19	13	42/40	20
MG40-1230-AL	M40×1.5	40	12*30	14	48/50	10
MG42-1230-AL	M42×2.0	42	12*30	15	48/50	10
MG48-1230-AL	M48×2.0	48	12*30	15	58/50	10
MG50-1334-AL	M50×1.5	50	13*34	15	58/60	10
MG63S-1641-AL	M63×1.5	63	16*41	15	71/65	10
MG63S-2044-AL	M63×1.5	63	20*44	15	71/76	10
MG63-2055-AL	M63×1.5	63	20*55	15	71/76	10
MG72-2055-AL	M72×2.0	72	20*55	15	80/75	2
PG13.5-0508-AL	PG13.5	20.4	5*8	10	24/24	50
PG13.5-0612-AL	PG13.5	20.4	6*12	10	24/24	50
PG16-0410-AL	PG16	22.5	4*10	11	26/26	50
PG16-0612-AL	PG16	22.5	6*12	11	26/26	50
PG16-0814-AL	PG16	22.5	8*14	11	26/26	50
PG21-0511-AL	PG21	28.3	5*11	12	32/31	50
PG21-0614-AL	PG21	28.3	7*14	12	32/31	50
PG29-0519-AL	PG29	37	5*19	12	40/40	20
PG36-1230-AL	PG36	47	12*30	15	58/50	10
PG42-1334-AL	PG42	54	13*34	15.5	60/60	10
PG48-1641-AL	PG48	59.3	16*41	15	71/65	10
PG48-2044-AL	PG48	59.3	20*44	15	71/65	10
PG48-2055-AL	PG48	59.3	20*55	15	71/76	10

产品参数表/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	整袋包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
G1/2-0508-AL	G1/2	20.95	5*8	12	24/24	50
G1/2-0612-AL	G1/2	20.95	6*12	12	24/24	50
G1/2D-0410-AL	G1/2	20.95	4*10	12	24/26	50
G1/2D-0612-AL	G1/2	20.95	6*12	12	24/26	50
G1/2D-0814-AL	G1/2	20.95	8*14	12	24/26	50
G3/4-0511-AL	G3/4	26.44	5*11	12	30/31	50
G3/4-0614-AL	G3/4	26.44	7*14	12	30/31	50
G1-0519-AL	G1	33.2	5*19	15	38/40	20
G1-1/4-1230-AL	G1-1/4	41.9	12*30	15	48/50	10
G1-1/2-1230-AL	G1-1/2	47.8	12*30	15	55/50	10
G1-1/2-1334-AL	G1-1/2	47.8	13*34	15	55/60	10
G2-1641-AL	G2	59.6	16*41	15	71/65	10
G2-2044-AL	G2	59.6	20*44	15	71/65	10
G2-2055-AL	G2	59.6	20*55	15	71/76	10
NPT1/2-0508-AL	NPT1/2	20.95	5*8	13	24	50
NPT1/2-0612-AL	NPT1/2	20.95	6*12	13	24	50
NPT1/2D-0410-AL	NPT1/2	20.95	4*10	13	26	50
NPT1/2D-0612-AL	NPT1/2	20.95	6*12	13	26	50
NPT1/2D-0814-AL	NPT1/2	20.95	8*14	13	26	50
NPT3/4-0511-AL	NPT3/4	26.44	5*11	13	31	50
NPT3/4-0614-AL	NPT3/4	26.44	7*14	13	31	50
NPT1-0519-AL	NPT1	33.2	5*19	15	40	20
NPT1-1/4-1230-AL	NPT1-1/4	41.9	12*30	15	50	10
NPT1-1/2-1230-AL	NPT1-1/2	47.8	12*30	15	50	10
NPT1-1/2-1334-AL	NPT1-1/2	47.8	13*34	15	60	10
NPT2-1641-AL	NPT2	59.6	16*41	15	65	10
NPT2-2044-AL	NPT2	59.6	20*44	15	65	10
NPT2-2055-AL	NPT2	59.6	20*55	15	76	10

多孔铝制电缆防水接头

Multi holes aluminum cable gland

材料：6061铝，密封件EPDM，夹紧爪尼龙

检测：符合CE，IP68

温度：-40℃~100℃

特点：优质6061铝材料制成，轻量化设计，防水、防尘、表面处理可选择原色或发黑处理，外形美观，使用便捷

说明：本产品不配备锁紧螺母，标配密封垫片



Material: 6061 aluminum, sealing EPDM, clamping claw nylon

Testing: Compliant with CE, IP68

Temperature:- 40℃~100℃

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, Dustproof and surface treatment can choose between primary color or blackening treatment, with a beautiful appearance Observation, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket

产品参数表

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Cable range	Thread length	Wrench Size	packing
PN.	Metric	mm	mm	nut/cap mm	Pcs/bag
MG12-H2-03-AL	M12×1.5	1.5~3	9	15/17	50
MG12-H3-02-AL	M12×1.5	1.5~2.6	9	15/17	50
MG12-H4-02-AL	M12×1.5	1.5~2.3	9	15/17	50
MG16-H2-04-AL	M16×1.5	2~4	9.5	20/21	50
MG16-H3-04-AL	M16×1.5	2~4	9.5	20/21	50
MG16-H4-03-AL	M16×1.5	1.6~3.2	9.5	20/21	50
MG16-H6-02-AL	M16×1.5	1.2~2.1	9.5	20/21	50

MG16-H8-02-AL	M16×1.5	1.2~2.1	9.5	20/21	50
MG20-H2-06-AL	M20×1.5	3~6	12	24/26	50
MG20-H3-05-AL	M20×1.5	3~5	12	24/26	50
MG20-H4-05-AL	M20×1.5	3~4.5	12	24/26	50
MG20-H5-04-AL	M20×1.5	2.5~4	12	24/26	50
MG20-H6-03-AL	M20×1.5	1.5~3	12	24/26	50
MG25-H2-08-AL	M25×1.5	5~8	12	30/31	50
MG25-H3-08-AL	M25×1.5	5~8	12	30/31	50
MG25-H4-07-AL	M25×1.5	5~7	12	30/31	50
MG25-H5-06-AL	M25×1.5	4~6	12	30/31	50
MG25-H6-05-AL	M25×1.5	3~5	12	30/31	50
MG25-H7-04-AL	M25×1.5	2.5~4	12	30/31	50
MG25-H8-04-AL	M25×1.5	2.5~4	12	30/31	50
MG32-H2-10-AL	M32×1.5	6~10	12.5	38/40	20
MG32-H3-10-AL	M32×1.5	6~10	12.5	38/40	20
MG32-H4-09-AL	M32×1.5	7~9	12.5	38/40	20
MG32-H4-07-AL	M32×1.5	5~7	12.5	38/40	20
MG32-H5-08-AL	M32×1.5	6~8	12.5	38/40	20
MG32-H6-07-AL	M32×1.5	5~7	12.5	38/40	20
MG32-H6-05-AL	M32×1.5	4~6	12.5	38/40	20
MG32-H7-06-AL	M32×1.5	3~5	12.5	38/40	20
MG32-H8-05-AL	M32×1.5	3~5	12.5	38/40	20
MG40-H2-13-AL	M40×1.5	9~13	14	48/50	10
MG40-H3-12-AL	M40×1.5	9~12	14	48/50	10
MG40-H4-12-AL	M40×1.5	9~12	14	48/50	10
MG40-H5-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H6-10-AL	M40×1.5	7~10	14	48/50	10
MG40-H6-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H7-08-AL	M40×1.5	6~8	14	48/50	10
MG40-H8-06-AL	M40×1.5	4~6	14	48/50	10
MG40-H8-05-AL	M40×1.5	3~5	14	48/50	10
MG40-H9-05-AL	M40×1.5	3~5	14	48/50	10
MG40-H10-05-AL	M40×1.5	3~5	14	48/50	10
MG50-H2-15-AL	M50×1.5	11~15	15	58/60	10
MG50-H3-12-AL	M50×1.5	8~12	15	58/60	10
MG63-H2-17-AL	M63×1.5	14~17	15	71/76	10
MG63-H3-13-AL	M63×1.5	9~13	15	71/76	10
MG63-H6-12-AL	M63×1.5	9~12	15	71/76	10

屏蔽铝制电缆防水接头

Shielded aluminum cable gland

材料: 6061铝, 防磁片为紫铜, 密封件尼龙与EPDM



检测: 符合CE, IP68

温度: -40°C~100°C

特点: 优质6061铝材料制成, 轻量化设计, 防水、防尘、表面处理可选择原色或发黑处理, 防电磁屏蔽, 外形美观, 使用便捷

说明: 本产品不配备锁紧螺母, 标配密封垫片



Material: 6061 aluminum, anti magnetic sheet made of purple copper, sealing components made of nylon and EPDM

Testing: Compliant with CE, IP68

Temperature:- 40°C~100°C

Features: Made of high-quality 6061 aluminum material, lightweight design, waterproof, dustproof, surface treatment can choose original color or blackening treatment, anti electromagnetic shielding, beautiful appearance, convenient to use

Description: This product is not equipped with a locking nut and comes standard with a sealing gasket



迫紧螺母



夹紧爪



夹紧圈




屏蔽片



基本躯体



垫片

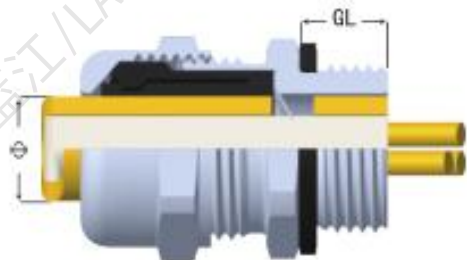

产品参数表/M

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-MG12-08-AL	M12×1.5	12	4~8	9	15/17	50
EMC-MG12-05-AL	M12×1.5	12	3~5	9	15/17	50
EMC-MG16-10-AL	M16×1.5	16	6~10	9.5	20/21	50
EMC-MG16-07-AL	M16×1.5	16	4~7	9.5	20/21	50
EMC-MG18-10-AL	M18×1.5	18	6~10	9.5	21/21	50
EMC-MG20S-12-AL	M20×1.5	20	7~12	12	24/24	50
EMC-MG20S-09-AL	M20×1.5	20	5~9	12	24/24	50
EMC-MG20-14-AL	M20×1.5	20	8~14	12	24/26	50
EMC-MG22-14-AL	M22×1.5	22	8~14	12	26/26	50
EMC-MG24-14-AL	M24×1.5	24	8~14	10.5	28/26	50
EMC-MG25-18-AL	M25×1.5	25	13~18	12	30/31	50
EMC-MG25-16-AL	M25×1.5	25	11~16	12	30/31	50
EMC-MG27-18-AL	M27×1.5 (2)	27	13~18	12	30/31	50
EMC-MG30-18-AL	M30×1.5 (2)	30	13~18	12.5	34/31	50
EMC-MG32-25-AL	M32×1.5	32	18~25	12.5	38/40	20
EMC-MG32-22-AL	M32×1.5	32	16~22	12.5	38/40	20
EMC-MG36-25-AL	M36×1.5 (2)	36	18~25	13	42/40	20
EMC-MG40-31-AL	M40×1.5	40	25~31	14	48/50	10
EMC-MG40-25-AL	M40×1.5	40	18~25	14	48/50	10
EMC-MG42-31-AL	M42×2.0	42	25~31	15	48/50	10
EMC-MG48-31-AL	M48×2.0	48	25~31	15	58/50	10
EMC-MG50-41-AL	M50×1.5	50	33~41	15	58/60	10
EMC-MG50-33-AL	M50×1.5	50	26~33	15	58/60	10
EMC-MG60-44-AL	M60×2.0	60	36~44	15	71/65	10
EMC-MG63-44-AL	M63×1.5	63	36~44	15	71/65	10
EMC-MG63-54-AL	M63×1.5	63	46~54	15	71/76	10

产品参数表/PG/G/NPT

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG Φ mm	Φ mm	GL mm	nut/cap mm	PCS
EMC-PG7-08-AL	PG7	12.5	4~8	9	15/17	50
EMC-PG9-08-AL	PG9	15.2	4~8	9	17/17	50
EMC-PG11-10-AL	PG11	18.6	6~10	9.5	21/21	50
EMC-PG13.5-12-AL	PG13.5	20.4	7~12	10.5	24/24	50
EMC-PG16-14-AL	PG16	22.5	8~14	12	26/26	50
EMC-PG19-14-AL	PG19	22.5	8~14	10.5	28/26	50
EMC-PG21-18-AL	PG21	28.3	13~18	12	32/31	50
EMC-PG29-25-AL	PG29	37	18~25	12.5	40/40	20
EMC-PG36-31-AL	PG36	47	25~31	15	58/50	10
EMC-PG42-41-AL	PG42	54	33~41	15	60/60	10
EMC-PG48-44-AL	PG48	59.3	36~44	15	71/65	10
EMC-G1/4-08-AL	G1/4	13.15	4~8	9	17/17	50
EMC-G3/8-10-AL	G3/8	16.66	6~10	9.5	21/21	50
EMC-G1/2-14-AL	G1/2	20.99	8~14	12	24/26	50
EMC-G1/2-12-AL	G1/2	20.99	7~12	12	24/24	50
EMC-G3/4-18-AL	G3/4	26.44	13~18	12	30/31	50
EMC-G1-25-AL	G1	33.25	18~25	15	38/40	20
EMC-G1-1/4-31-AL	G1-1/4	41.91	25~31	15	48/50	10
EMC-G1-1/2-31-AL	G1-1/2	47.8	25~31	15	55/50	10
EMC-G1-1/2-41-AL	G1-1/2	47.8	33~41	15	55/60	10
EMC-G2-44-AL	G2	59.61	36~44	15	71/65	1
EMC-NPT1/4-08-AL	NPT1/4	13.15	4~8	9	17	50
EMC-NPT3/8-10-AL	NPT3/8	17.05	6~10	10	21	50
EMC-NPT1/2-14-AL	NPT1/2	21.22	8~14	13	26	50
EMC-NPT1/2-12-AL	NPT1/2	21.22	7~12	11	24	50
EMC-NPT3/4-18-AL	NPT3/4	26.56	13~18	13	31	50
EMC-NPT1-25-AL	NPT1	33.23	18~25	15	40	20
EMC-NPT1-1/4-31-AL	NPT1-1/4	41.98	25~31	15	50	10
EMC-NPT1-1/2-31-AL	NPT1-1/2	48.05	25~31	15	50	10
EMC-NPT1-1/2-41-AL	NPT1-1/2	48.05	33~41	15	60	10
EMC-NPT2-44-AL	NPT2	60.09	36~44	15	65	10

硅胶铝制电缆防水接头

Silicone aluminum cable gland

材料：6061铝，密封件为硅胶

检测：符合CE， IP68

温度：-20℃~150℃

特点：6061铝材，轻量化，防水、防尘、耐高温

说明：不配螺母， 标配密封O型圈


Material: 6061 aluminum, seal made of silicone

Testing: Compliant with CE, IP68

Temperature:- 20℃~150℃

Features: 6061 aluminum material, lightweight, waterproof, dustproof, high temperature resistant

Description: Not equipped with nuts, standard with sealed O-rings

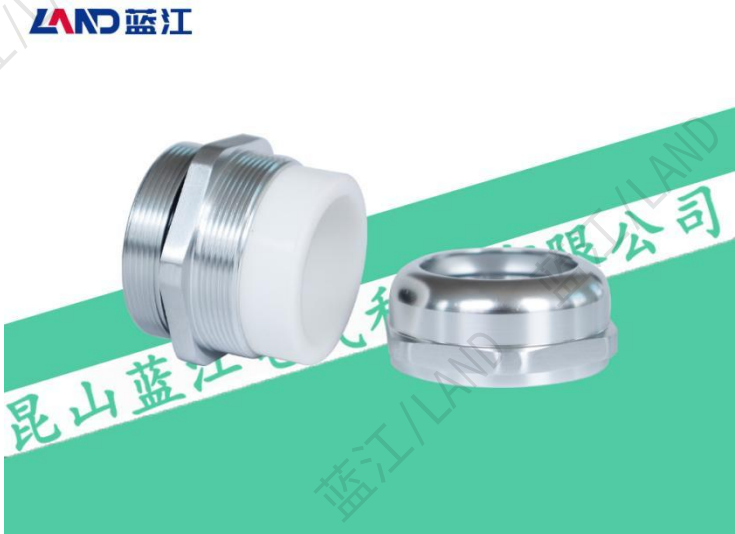

产品参数表

蓝江产品型号	螺纹规格	建议开孔	电缆范围	螺纹长度	扳手尺寸	包装
Product model	Thread size	Hole size	Cable range	Thread length	Wrench Size	packaging
PN.	Metric	AG φ mm	φ mm	GL mm	nut/cap mm	PCS
MG12T-06-AL	M12×1.5	12	3~6.5	6	14/14	100
MG12T-08-AL	M12×1.5	12	4~8	6	14/16	100
MG16T-08-AL	M16×1.5	16	4~8	7	17/18	100
MG16T-10-AL	M16×1.5	16	5~10	7	20/20	100
MG20T-12-AL	M20×1.5	20	6~12	8	22/22	100
MG20T-14-AL	M20×1.5	20	8~14	8	24/24	100
MG25T-16-AL	M25×1.5	25	10~16	8	27/27	50
MG25T-18-AL	M25×1.5	25	13~18	8	30/30	50
MG32T-22-AL	M32×1.5 (2)	32	15~22	9	34/34	50
MG32T-25-AL	M32×1.5 (2)	32	18~25	9	40/40	50
MG40T-25-AL	M40×1.5 (2)	40	18~25	9	40/43	20
MG40T-28-AL	M40×1.5 (2)	40	20~28	10	43/43	20
MG50T-32-AL	M50×1.5 (2)	50	24~32	10	57/55	20
MG50T-38-AL	M50×1.5 (2)	50	30~38	10	58/55	20
MG63T-44-AL	M63×1.5 (2)	63	37~44	12	64/68	10

防爆不锈钢闷盖


Explosion proof stainless steel plug

材料: 304, 可选316或316L



测试: IP68, CE, Ex

特性: 采用优质不锈钢制成, 内外丝结构紧密, 符合隔爆, 增安及粉尘防爆标准, 密封件为硅胶, 使得本产品在高温环境亦可正常工作, 防护等级高且可耐一般酸碱及其他溶剂

说明: 默认不附螺母, 如需联系另行采购

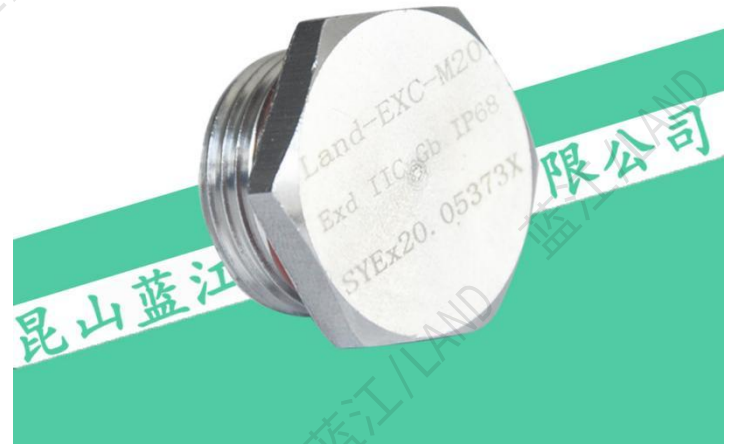

可选配件

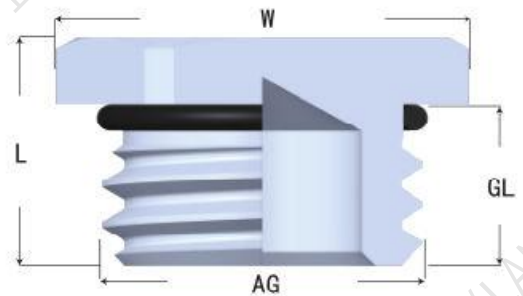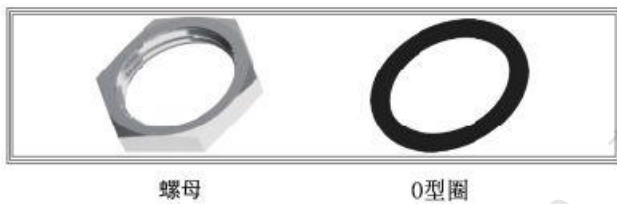

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis, and other solvents

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
Exd-GL-M12-SS	M12×1.5	12	11	14	100
Exd-GL-M14-SS	M14×1.5	14	11	18	100
Exd-GL-M16-SS	M16×1.5	16	11	20	100
Exd-GL-M18-SS	M18×1.5	18	11	22	100
Exd-GL-M20-SS	M20×1.5	20	12	24	50
Exd-GL-M22-SS	M22×1.5	22	12	26	50
Exd-GL-M24-SS	M24×1.5	24	12	28	50
Exd-GL-M25-SS	M25×1.5	25	14	30	50
Exd-GL-M27-SS	M27×1.5	27	14	32	50
Exd-GL-M27-SS	M27×2.0	27	14	32	50
Exd-GL-M30-SS	M30×1.5	30	14	34	50
Exd-GL-M30-SS	M30×2.0	30	14	34	50
Exd-GL-M32-SS	M32×1.5	32	14	38	50
Exd-GL-M33-SS	M33×2.0	32	14	38	50
Exd-GL-M36-SS	M36×1.5	36	14	42	20
Exd-GL-M36-SS	M36×2.0	36	14	42	20
Exd-GL-M40-SS	M40×1.5	40	15	45	20
Exd-GL-M42-SS	M42×2.0	42	15	45	20
Exd-GL-M48-SS	M48×2.0	48	15	55	20
Exd-GL-M50-SS	M50×1.5	50	15	55	20
Exd-GL-M60-SS	M60×2.0	60	15	65	10
Exd-GL-M63-SS	M63×1.5	63	15	68	10

产品参数表/NPT/G (PF) /PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
Exd-GL-NPT1/4-SS	NPT1/4	13.5	10	14	100
Exd-GL-NPT3/8-SS	NPT3/8	16.65	10	22	100
Exd-GL-NPT1/2-SS	NPT1/2	20.95	14	24	100
Exd-GL-NPT3/4-SS	NPT3/4	26.44	14	30	50
Exd-GL-NPT1-SS	NPT1	33.24	15	38	50
Exd-GL-NPT1-1/4-SS	NPT1-1/4	41.91	15	46	20
Exd-GL-NPT1-1/2-SS	NPT1-1/2	47.8	15	55	20
Exd-GL-NPT2-SS	NPT2	59.61	15	65	10
Exe-GL-G1/4-SS	G1/4	13.5	10	14	100
Exe-GL-G3/8-SS	G3/8	16.65	10	22	100
Exe-GL-G1/2-SS	G1/2	20.95	14	24	100
Exe-GL-G3/4-SS	G3/4	26.44	14	30	50
Exe-GL-G1-SS	G1	33.24	15	38	50
Exe-GL-G1-1/4-SS	G1-1/4	41.91	15	46	20
Exe-GL-G1-1/2-SS	G1-1/2	47.8	15	50	20
Exe-GL-G2-SS	G2	59.61	15	65	10
Exe-GL-PG7-SS	PG7	12.5	10	14	100
Exe-GL-PG9-SS	PG9	15.2	10	18	100
Exe-GL-PG11-SS	PG11	16.8	11	22	100
Exe-GL-PG13.5-SS	PG13.5	20.4	12	24	50
Exe-GL-PG16-SS	PG16	22.5	12	26	50
Exe-GL-PG19-SS	PG19	23.5	12	28	50
Exe-GL-PG21-SS	PG21	28.3	14	32	50
Exe-GL-PG25-SS	PG25	29.8	14	34	50
Exe-GL-PG29-SS	PG29	37	14	42	50
Exe-GL-PG36-SS	PG36	47	15	55	20
Exe-GL-PG42-SS	PG42	54	15	60	20
Exe-GL-PG48-SS	PG48	59.8	15	65	10

圆形不锈钢闷盖

Stainless steel circular plug

LAND 蓝江

材料：304，可选316或316L



测试：IP68，CE

特性：采用优质不锈钢制成，内外丝结构紧密，密封圈为硅胶材质，使得本产品在高温环境亦可正常工作，防护等级高且可耐一般酸碱及其他溶剂

说明：默认不附螺母，如需需另行采购



可选配件

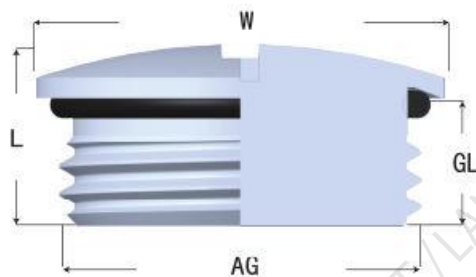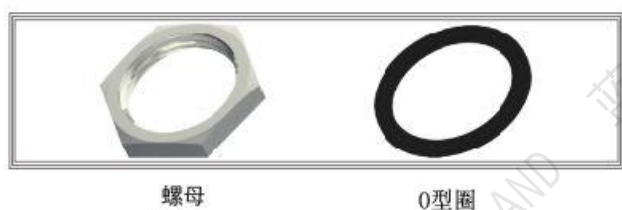

Material: 304, optional 316 or 316L

Testing: IP68, CE

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, and the sealing ring is made of silicone material, which allows this product to work normally in high temperature environments. It has a high protection level and can withstand general acids, alkalis, and other solvents

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M12-SS	M12×1.5	12	6	14	100
GY-M16-SS	M16×1.5	16	7	18	100
GY-M18-SS	M18×1.5	18	7	20	100
GY-M20-SS	M20×1.5	20	7	23	50
GY-M22-SS	M22×1.5	22	7	25	50
GY-M24-SS	M24×1.5	24	7	28	50
GY-M25-SS	M25×1.5	25	7	28	50
GY-M32-SS	M32×1.5	32	10	35	20
GY-M40-SS	M40×1.5	40	10	46	10
GY-M50-SS	M50×1.5	50	10	56	10
GY-M63-SS	M63×1.5	63	10	68	10
GY-PG7-SS	PG7	12.5	6	14	100
GY-PG9-SS	PG9	15.2	7	18	100
GY-PG11-SS	PG11	16.6	7	20	100
GY-PG13.5-SS	PG13.5	20.5	7	23	50
GY-PG16-SS	PG16	22.5	7	25	50
GY-PG21-SS	PG21	28.3	7	32	50
GY-PG29-SS	PG29	37	10	40	20
GY-PG36-SS	PG36	47	10	52	10
GY-PG42-SS	PG42	54	10	58	10
GY-PG48-SS	PG48	59.3	10	65	10
GY-G1/4-SS	G1/4	13.5	6	16	100
GY-G3/8-SS	G3/8	16.65	7	20	100
GY-G1/2-SS	G1/2	20.95	7	23	50
GY-G3/4-SS	G3/4	26.44	7	32	50
GY-G1-SS	G1	33.24	10	38	20
GY-G1-1/4-SS	G1-1/4	41.91	10	46	10
GY-G1-1/2-SS	G1-1/2	47.8	10	52	10
GY-G2-SS	G2	59.61	10	65	10
GY-NPT1/4-SS	NPT1/4	13.5	6	16	100
GY-NPT3/8-SS	NPT3/8	16.65	7	20	100
GY-NPT1/2-SS	NPT1/2	20.95	7	23	50
GY-NPT3/4-SS	NPT3/4	26.44	7	32	50
GY-NPT1-SS	NPT1	33.24	10	38	20
GY-NPT1-1/4-SS	NPT1-1/4	41.91	10	46	10
GY-NPT1-1/2-SS	NPT1-1/2	47.8	10	52	10
GY-NPT2-SS	NPT2	59.61	10	65	10

铜镀镍六角闷盖

Brass nickel plated hexagonal plug

LAND 蓝江

材料：黄铜镀镍


测试：IP68, CE

特性：采用优质铜镀镍制成，外六角结构，用于设备堵孔，可防水防尘密封，防护等级IP68，内外丝结构紧密，连接顺畅

说明：默认不附螺母，如需另行采购




可选配件

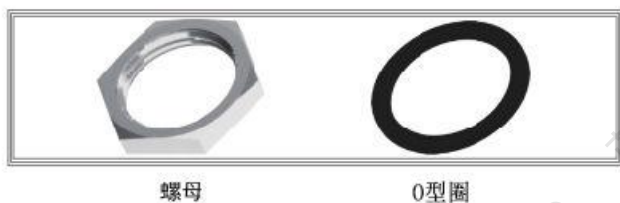

螺母

O型圈

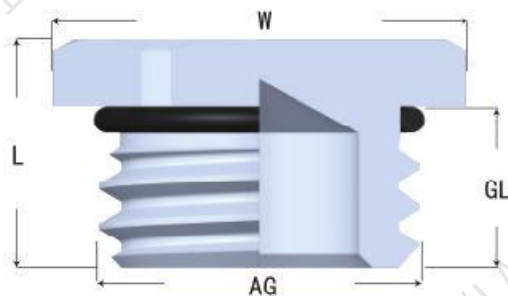

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, with an outer hexagonal structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, tight inner and outer wire structure, smooth connection

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GL-M10	M10×1.5	10	5	12	100
GL-M12	M12×1.5	12	5	14	100
GL-M14	M14×1.5	14	5	16	100
GL-M16	M16×1.5	16	6	18	100
GL-M18	M18×1.5	18	6	20	100
GL-M20	M20×1.5	20	7	22	100
GL-M22	M22×1.5	22	7	24	100
GL-M24	M24×1.5	24	7	27	100
GL-M25	M25×1.5	25	7	28	50
GL-M27	M27×1.5	27	7	30	50
GL-M30	M30×2.0	30	7	34	50
GL-M32	M32×1.5	32	7	36	50
GL-M33	M33×2.0	33	8	36	50
GL-M36	M36×1.5	36	8	40	50
GL-M40	M40×1.5	40	9	45	20
GL-M42	M42×2.0	42	9	45	20
GL-M48	M48×2.0	48	10	52	20
GL-M50	M50×1.5	50	10	55	10
GL-M63	M63×1.5	63	10	68	10
GL-M64	M64×2.0	64	10	68	10

产品参数表/NPT/G(PF)/PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GL-PG7	PG7	12.5	5	14	100
GL-PG9	PG9	15.2	6	17	100
GL-PG11	PG11	16.8	6	20	100
GL-PG13.5	PG13.5	20.4	7	22	50
GL-PG16	PG16	22.5	7	24	50
GL-PG21	PG21	28.3	7	30	50
GL-PG29	PG29	37	8	40	50
GL-PG36	PG36	47	9	50	20
GL-PG42	PG42	54	10	60	20
GL-PG48	PG48	59.8	10	64	10
GL-G1/4	G1/4	13.5	11	14	100
GL-G3/8	G3/8	16.65	12	22	100
GL-G1/2	G1/2	20.95	12	24	100
GL-G3/4	G3/4	26.44	14	30	50
GL-G1	G1	33.24	15	38	50
GL-G1-1/4	G1-1/4	41.91	15	46	20
GL-G1-1/2	G1-1/2	47.8	16	50	20
GL-G2	G2	59.61	18	65	10
GL-NPT1/4	NPT1/4	13.5	11	14	100
GL-NPT3/8	NPT3/8	16.65	12	22	100
GL-NPT1/2	NPT1/2	20.95	12	24	100
GL-NPT3/4	NPT3/4	26.44	14	30	50
GL-NPT1	NPT1	33.24	15	38	50
GL-NPT1-1/4	NPT1-1/4	41.91	15	46	20
GL-NPT1-1/2	NPT1-1/2	47.8	16	50	20
GL-NPT2	NPT2	59.61	18	65	10

铜镀镍圆形闷盖


Brass nickel plated circular plug

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，外圆形结构，用于设备堵孔，可防水防尘密封，防护等级IP68，内外丝结构紧密，连接顺畅

说明：默认不附螺母，如需另行采购

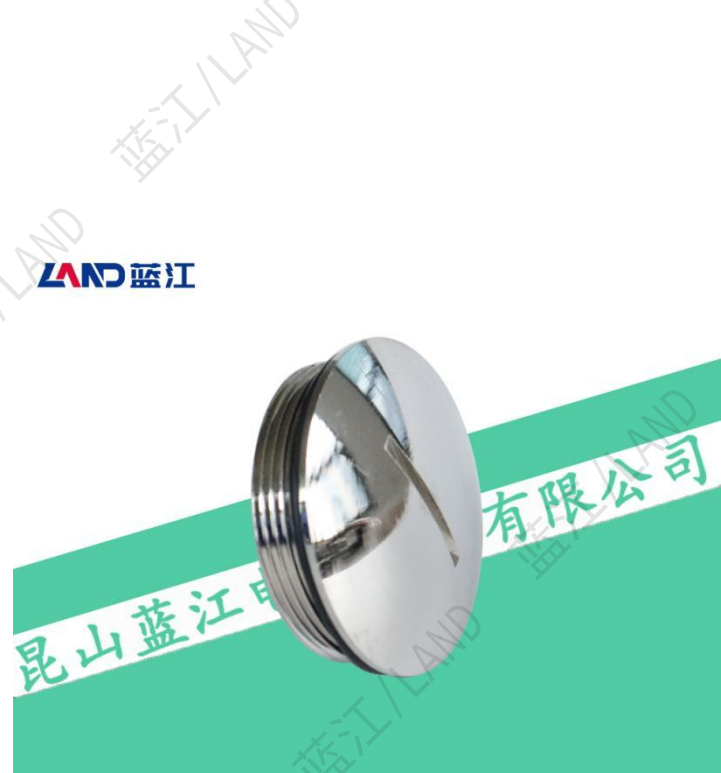

可选配件

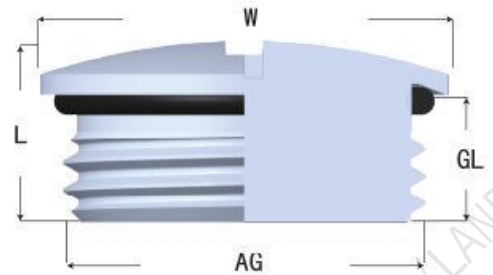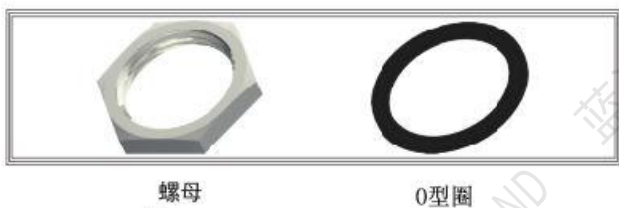

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, with an outer circular structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, tight inner and outer wire structure, smooth connection

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表/M

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M10	M10×1.5	10	5	12	100
GY-M12	M12×1.5	12	5	14	100
GY-M16	M16×1.5	16	6	18	100
GY-M18	M18×1.5	18	6	21	100
GY-M20	M20×1.5	20	7	23	100
GY-M22	M22×1.5	22	7	25	100
GY-M24	M24×1.5	24	7	28	100
GY-M25	M25×1.5	25	7	28	50
GY-M27	M27×1.5	27	7	29.5	50
GY-M30	M30×2.0	30	7	32.5	50
GY-M32	M32×1.5	32	7	35	50
GY-M33	M33×2.0	33	8	36	50
GY-M36	M36×1.5	36	8	38.5	50
GY-M40	M40×1.5	40	9	44	20
GY-M42	M42×2.0	42	9	46	20
GY-M48	M48×2.0	48	10	52	20
GY-M50	M50×1.5	50	10	54	10
GY-M63	M63×1.5	63	10	67	10
GY-M64	M64×2.0	64	10	68	10

产品参数表/NPT/G(PF)/PG

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GY	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-PG7	PG7	12.5	5	14	100
GY-PG9	PG9	15.2	6	17	100
GY-PG11	PG11	16.8	6	21	100
GY-PG13.5	PG13.5	20.4	7	23	50
GY-PG16	PG16	22.5	7	25	50
GY-PG21	PG21	28.3	7	31	50
GY-PG29	PG29	37	8	40	50
GY-PG36	PG36	47	9	50	20
GY-PG42	PG42	54	10	57	20
GY-PG48	PG48	59.8	10	67	10
GY-G1/4	G1/4	13.5	11	17	100
GY-G3/8	G3/8	16.65	12	18	100
GY-G1/2	G1/2	20.95	12	23	100
GY-G3/4	G3/4	26.44	14	31	50
GY-G1	G1	33.24	15	35	50
GY-G1-1/4	G1-1/4	41.91	15	44	20
GY-G1-1/2	G1-1/2	47.8	16	52	20
GY-G2	G2	59.61	18	67	10
GY-NPT1/4	NPT1/4	13.5	11	14	100
GY-NPT3/8	NPT3/8	16.65	12	22	100
GY-NPT1/2	NPT1/2	20.95	12	24	100
GY-NPT3/4	NPT3/4	26.44	14	30	50
GY-NPT1	NPT1	33.24	15	38	50
GY-NPT1-1/4	NPT1-1/4	41.91	15	46	20
GY-NPT1-1/2	NPT1-1/2	47.8	16	50	20
GY-NPT2	NPT2	59.61	18	65	10

内外六角尼龙闷盖

Inner and outer hexagonal nylon plug

材料：尼龙

测试：IP68，CE，ROHS


特性：采用优质尼龙料制成，内外六角结构，用于设备堵孔，可防水防尘密封，防护等级IP68

说明：默认不附螺母，如需另行采购

Material: Nylon

Testing: IP68, CE, ROHS

Features: Made of high-quality nylon material, with internal and external hexagonal structure, used for equipment hole blocking, waterproof and dustproof sealing, protection level IP68, default without nuts

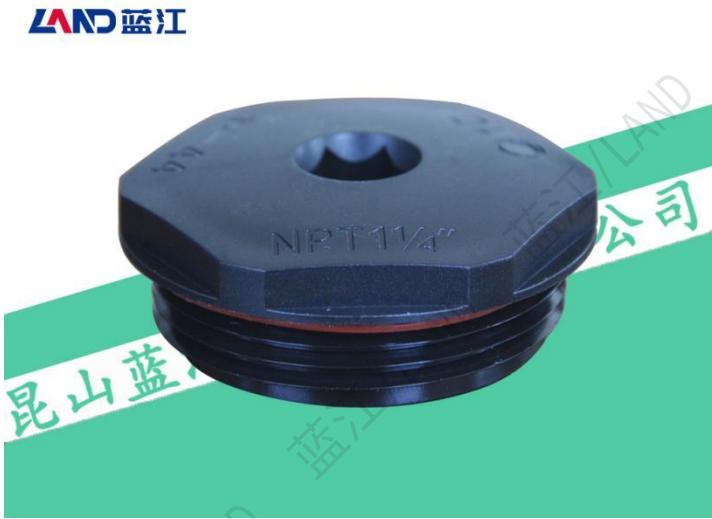

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	GL	W1	W2	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GLN-M12	M12×1.5	9.5	15	4	100
GLN-M16	M16×1.5	9.5	19	6	100
GLN-M20	M20×1.5	9.5	24	6	100
GLN-M25	M25×1.5	10.5	27	8	50
GLN-M32	M32×1.5	11	36	10	50
GLN-M40	M40×1.5	11.5	43	10	20
GLN-M50	M50×1.5	11.5	53	10	10
GLN-M63	M63×1.5	11.5	65	12	10
GLN-NPT3/8	NPT3/8	9.5	19	6	100
GLN-NPT1/2	NPT1/2	9.5	24	6	100
GLN-NPT3/4	NPT3/4	10.5	30	8	50
GLN-NPT1	NPT1	11	36	10	50
GLN-NPT1-1/4	NPT1-1/4	11.5	44	10	20
GLN-NPT1-1/2	NPT1-1/2	11	50	10	20
GLN-NPT2	NPT2	11.5	61	12	10

圆形尼龙闷盖

Circular nylon plug

LAND 蓝江

材料：尼龙

测试：IP68, CE, ROHS

特性：采用优质尼龙料制成，圆形结构设计，用于设备堵孔，可防水防尘密封，防护等级IP68

说明：默认不附螺母，如需另行采购




可选配件



螺母

垫片

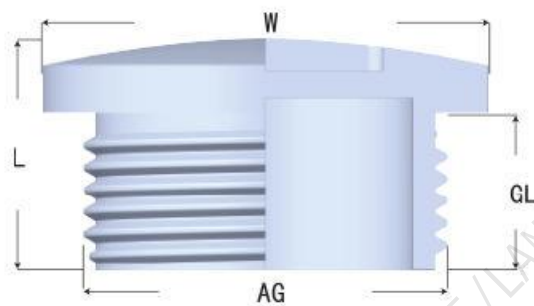

Material: Nylon

Testing: IP68, CE, ROHS

Features: Made of high-quality nylon material, with a circular structure design, used for plugging equipment holes, waterproof and dustproof sealing, and a protection level of IP68, Default without nuts and sealing rings

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size			包装
Product model	Thread size	AG	GL	W	packing
PN.	M/PG/G/NPT	Φ mm	Φ mm	Φ mm	Pcs/bag
GY-M12	M12×1.5	12	8	15	100
GY-M16	M16×1.5	16	8	19	100
GY-M18	M18×1.5	18	9	22	100
GY-M20	M20×1.5	20	9	25	100
GY-M22	M22×1.5	22	10	27	100
GY-M25	M25×1.5	25	10	30	50
GY-M27	M27×1.5	27	10	33	50
GY-M32	M32×1.5	32	10	38	50
GY-M40	M40×1.5	40	11	46	20
GY-M50	M50×1.5	50	13	56	10
GY-M63	M63×1.5	63	14	68	10
GY-PG7	PG7	12.5	8	15	100
GY-PG9	PG9	15.2	8	19	100
GY-PG11	PG11	16.8	9	22	100
GY-PG13.5	PG13.5	20.4	9	25	50
GY-PG16	PG16	22.5	10	27	50
GY-PG21	PG21	28.3	10	33	50
GY-PG29	PG29	37	11	40	50
GY-PG36	PG36	47	13	55	20
GY-PG42	PG42	54	13	62	20
GY-PG48	PG48	59.8	14	68	10
GY-G1/2	G1/2	20.95	9	25	100
GY-G3/4	G3/4	26.44	10	33	50
GY-G1	G1	33.24	10	38	50

防爆不锈钢扩径环


Ex stainless steel adapter connector

材料: 304, 可选316或316L


测试: IP68, CE, Ex

特性: 采用优质不锈钢制成, 内外丝结构紧密, 符合隔爆, 增安及粉尘防爆标准, 密封件为硅胶, 使得本产品在高温环境亦可正常工作, 防护等级高且可耐一般酸碱及其他溶剂


说明: 默认不附螺母, 如需另行采购

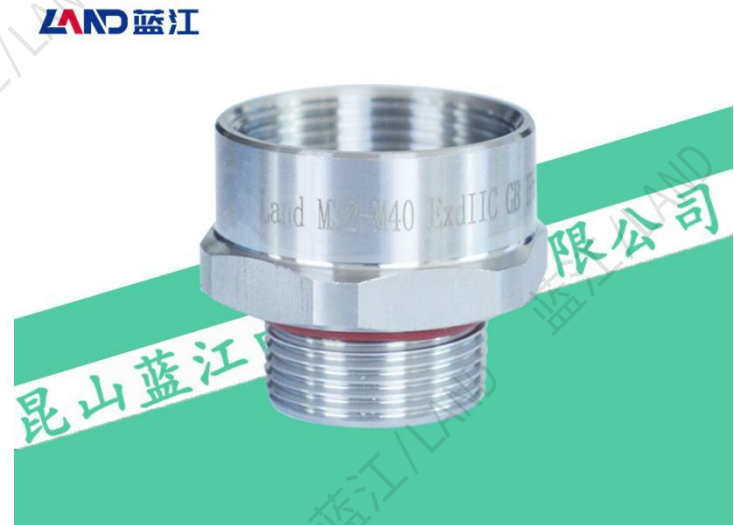

缩径环

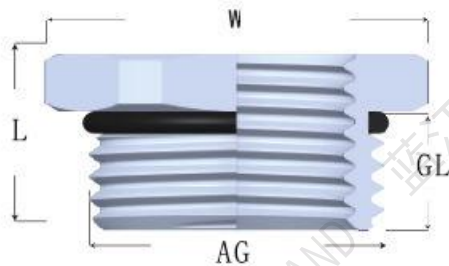

扩径环

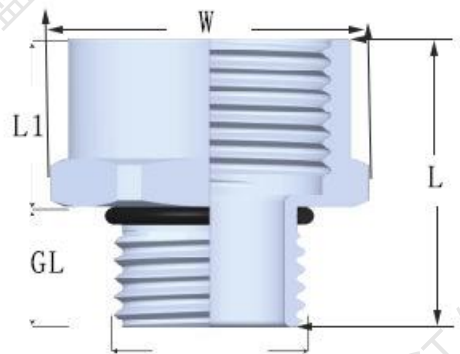

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis,

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ	mm	mm	Pcs/bag
Exd-M12-M16-SS	M12×1.5	M16×1.5	12	11	20	13	26	50
Exd-M12-M20-SS	M12×1.5	M20×1.5	12	11	24	13	26	50
Exd-M16-M20-SS	M16×1.5	M20×1.5	16	11	24	13	26	50
Exd-M16-M25-SS	M16×1.5	M25×1.5	16	11	30	14	27	50
Exd-M16-M32-SS	M16×1.5	M32×1.5	16	11	38	14	27	50
Exd-M16-NPT1/2-SS	M16×1.5	NPT1/2	16	11	24	14	27	50
Exd-M16-G1/2-SS	M16×1.5	G1/2	16	11	24	14	27	50
Exd-M18-M20-SS	M18×1.5	M20×1.5	18	11	24	13	26	50
Exd-M20-M25-SS	M20×1.5	M25×1.5	20	12	30	14	28	50
Exd-M20-M32-SS	M20×1.5	M32×1.5	20	12	38	14	28	50
Exd-M20-M40-SS	M20×1.5	M40×1.5	20	12	46	15	30	20
Exd-M20-NPT1/2-SS	M20×1.5	NPT1/2	20	12	24	14	28	50
Exd-M20-NPT3/4-SS	M20×1.5	NPT3/4	20	12	30	14	28	50
Exd-M20-NPT1-SS	M20×1.5	NPT1	20	12	38	15	30	50
Exd-M20-G1/2-SS	M20×1.5	G1/2	20	12	24	14	28	50
Exd-M20-G3/4-SS	M20×1.5	G3/4	20	12	30	14	28	50
Exd-M20-G1-SS	M20×1.5	G1	20	12	38	15	30	50
Exd-M20-PG16-SS	M20×1.5	PG16	20	12	26	13	27	50
Exd-M22-M25-SS	M22×1.5	M25×1.5	22	12	30	14	28	50
Exd-M25-M32-SS	M25×1.5	M32×1.5	25	14	38	14	30	50
Exd-M25-M40-SS	M25×1.5	M40×1.5	25	14	46	15	31	50
Exd-M25-NPT3/4-SS	M25×1.5	NPT3/4	25	14	30	14	30	50
Exd-M25-NPT1-SS	M25×1.5	NPT1	25	14	38	15	31	50
Exd-M25-G3/4-SS	M25×1.5	G3/4	25	14	30	14	30	50
Exd-M25-G1-SS	M25×1.5	G1	25	14	38	15	31	50
Exd-M27-M32-SS	M27×1.5	M32×1.5	27	14	38	14	30	50
Exd-M30-M32-SS	M30×1.5	M32×1.5	30	14	38	14	30	50
Exd-M32-M40-SS	M32×1.5	M40×1.5	32	14	46	14	30	50
Exd-M32-M50-SS	M32×1.5	M50×1.5	32	14	55	15	31	50
Exd-M32-NPT1-SS	M32×1.5	NPT1	32	14	38	15	31	50
Exd-M32-G1-SS	M32×1.5	G1	32	14	38	15	31	50
Exd-M40-M50-SS	M40×1.5	M50×1.5	40	15	55	15	32	10
Exd-M50-M63-SS	M50×1.5	M63×1.5	50	15	68	15	32	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ	mm	mm	Pcs/bag
Exd-NPT1/4-NPT3/8-SS	NPT1/4	NPT3/8	13.15	10	20	13	25	50
Exd-NPT3/8-NPT1/2-SS	NPT3/8	NPT1/2	16.66	10	24	14	26	50
Exd-NPT1/2-NPT3/4-SS	NPT1/2	NPT3/4	20.95	14	30	14	30	50
Exd-NPT1/2-NPT1-SS	NPT1/2	NPT1	20.95	14	38	15	31	50
Exd-NPT1/2-M20-SS	NPT1/2	M20×1.5	20.95	14	24	14	30	50
Exd-NPT1/2-M25-SS	NPT1/2	M25×1.5	20.95	14	30	14	30	50
Exd-NPT1/2-G1/2-SS	NPT1/2	G1/2	20.95	14	24	14	30	50
Exd-NPT1/2-G3/4-SS	NPT1/2	G3/4	20.95	14	30	14	30	50
Exd-NPT3/4-NPT1-SS	NPT3/4	NPT1	26.44	14	38	14	30	50
Exd-NPT3/4-M25-SS	NPT3/4	M25×1.5	26.44	14	30	14	30	50
Exd-NPT3/4-G3/4-SS	NPT3/4	G3/4	26.44	14	30	14	30	50
Exd-NPT1-NPT1-1/4-SS	NPT1	NPT1-1/4	33.24	15	46	15	32	50
Exd-NPT1-M32-SS	NPT1	M32×1.5	33.24	15	38	15	32	50
Exd-NPT1-G1-SS	NPT1	G1	33.24	15	38	15	32	50
Exd-NPT1-1/4-NPT1-1/2-SS	NPT1-1/4	NPT1-1/2	41.91	15	55	15	32	10
Exd-NPT1-1/2-NPT2-SS	NPT1-1/2	NPT2	47.8	15	65	15	32	10
Exe-G1/4-G3/8-SS	G1/4	G3/8	13.15	10	20	13	25	50
Exe-G3/8-G1/2-SS	G3/8	G1/2	16.66	10	24	14	26	50
Exe-G1/2-G3/4-SS	G1/2	G3/4	20.95	14	30	14	30	50
Exe-G1/2-G1-SS	G1/2	G1	20.95	14	38	15	31	50
Exe-G1/2-M20-SS	G1/2	M20×1.5	20.95	14	24	14	30	50
Exe-G1/2-M25-SS	G1/2	M25×1.5	20.95	14	30	14	30	50
Exe-G1/2-NPT1/2-SS	G1/2	NPT1/2	20.95	14	24	14	30	50
Exe-G1/2-NPT3/4-SS	G1/2	NPT3/4	20.95	14	30	14	30	50
Exe-G3/4-NPT1-SS	G3/4	NPT1	26.44	14	38	14	30	50
Exe-G3/4-M25-SS	G3/4	M25×1.5	26.44	14	30	14	30	50
Exe-G3/4-NPT3/4-SS	G3/4	NPT3/4	26.44	14	30	14	30	50
Exe-G1-G1-1/4-SS	G1	G1-1/4	33.24	15	46	15	32	50
Exe-G1-NPT1-SS	G1	NPT1	33.24	15	38	15	32	50
Exe-G1-1/4-G1-1/2-SS	G1-1/4	G1-1/2	41.91	15	55	15	32	10
Exe-G1-1/2-G2-SS	G1-1/2	G2	47.8	15	65	15	32	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size					包装
Product model	外螺纹	内螺纹	AG	GL	W	L1	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	mm	Pcs/bag
Exe-PG7-PG9-SS	PG7	PG9	12.5	10	18	13	25	50
Exe-PG9-PG11-SS	PG9	PG11	15.2	10	22	13	25	50
Exe-PG9-M20-SS	PG9	M20×1.5	15.2	10	24	13	25	50
Exe-PG9-G1/2-SS	PG9	G1/2	15.2	10	24	14	26	50
Exe-PG9-NPT1/2-SS	PG9	NPT1/2	15.2	10	24	14	26	50
Exe-PG11-PG13.5-SS	PG11	PG13.5	18.6	11	24	13	26	50
Exe-PG11-PG16-SS	PG11	PG16	18.6	11	26	13	26	50
Exe-PG11-M20-SS	PG11	M20×1.5	18.6	11	24	13	26	50
Exe-PG11-G1/2-SS	PG11	G1/2	18.6	11	24	14	27	50
Exe-PG11-NPT1/2-SS	PG11	NPT1/2	18.6	11	24	14	27	50
Exe-PG13.5-PG16-SS	PG13.5	PG16	20.5	12	26	13	27	50
Exe-PG13.5-M20-SS	PG13.5	M20×1.5	20.5	12	24	13	27	50
Exe-PG13.5-G1/2-SS	PG13.5	G1/2	20.5	12	24	14	28	50
Exe-PG13.5-NPT1/2-SS	PG13.5	NPT1/2	20.5	12	24	14	28	50
Exe-PG16-PG21-SS	PG16	PG21	22.5	12	32	14	28	50
Exe-PG16-M20-SS	PG16	M20×1.5	22.5	12	26	13	27	50
Exe-PG16-M25-SS	PG16	M25×1.5	22.5	12	30	14	28	50
Exe-PG16-G1/2-SS	PG16	G1/2	22.5	12	26	14	28	50
Exe-PG16-G3/4-SS	PG16	G3/4	22.5	12	30	14	28	50
Exe-PG16-NPT1/2-SS	PG16	NPT1/2	22.5	12	26	14	28	50
Exe-PG16-NPT3/4-SS	PG16	NPT3/4	22.5	12	30	14	28	50
Exe-PG21-PG29-SS	PG21	PG29	28.3	14	40	14	30	50
Exe-PG21-M25-SS	PG21	M25×1.5	28.3	14	32	14	30	50
Exe-PG21-G1-SS	PG21	G1	28.3	14	32	15	31	50
Exe-PG21-NPT1-SS	PG21	NPT1	28.3	14	32	15	31	50
Exe-PG29-PG36-SS	PG29	PG36	37	14	55	15	31	50
Exe-PG29-M32-SS	PG29	M32×1.5	37	14	40	14	30	50
Exe-PG29-G1-SS	PG29	G1	37	14	40	15	31	50
Exe-PG29-NPT1-SS	PG29	NPT1	37	14	40	15	31	50
Exe-PG36-PG42-SS	PG36	PG42	47	15	60	15	32	10
Exe-PG42-PG48-SS	PG42	PG48	54	15	65	15	32	10

防爆不锈钢缩径环

Ex stainless steel adapter connector


材料: 304, 可选316或316L

测试: IP68, CE, Ex



特性: 采用优质不锈钢制成, 内外丝结构紧密, 符合隔爆, 增安及粉尘防爆标准, 密封件为硅胶, 使得本产品在高温环境亦可正常工作, 防护等级高且可耐一般酸碱及其他溶剂

说明: 默认不附螺母, 如需另行采购

LAND 蓝江

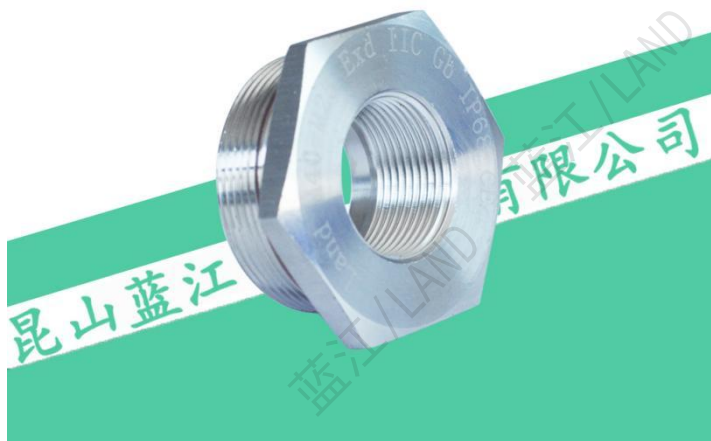

缩径环

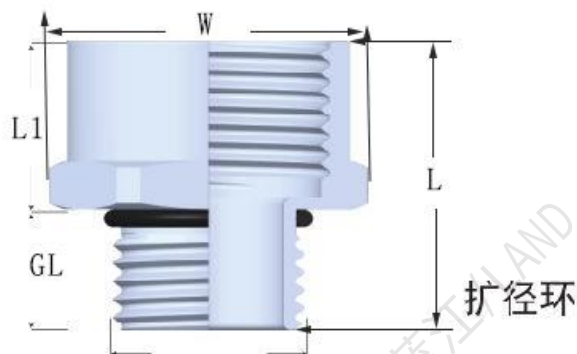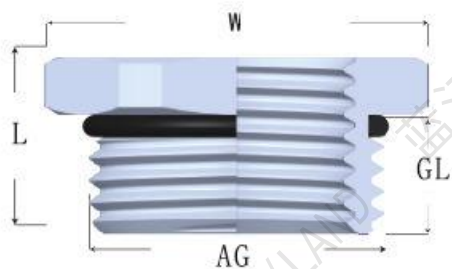

Material: 304, optional 316 or 316L

Testing: IP68, CE, Ex

Features: Made of high-quality stainless steel, the inner and outer wire structures are tight, meeting explosion-proof, increased safety, and dust explosion prevention standards. The sealing element is silicone, which allows this product to work normally in high temperature environments. The protection level is high and it can withstand general acids, alkalis. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exd-M16-M12-SS	M16×1.5	M12×1.5	16	11	20	15	50
Exd-M18-M16-SS	M18×1.5	M16×1.5	18	11	22	15	50
Exd-M20-M12-SS	M20×1.5	M12×1.5	20	12	24	17	50
Exd-M20-M16-SS	M20×1.5	M16×1.5	20	12	24	17	50
Exd-M20-PG9-SS	M20×1.5	PG9	20	12	24	17	50
Exd-M20-PG11-SS	M20×1.5	PG11	20	12	24	17	50
Exd-M25-M12-SS	M25×1.5	M12×1.5	25	14	30	20	50
Exd-M25-M16-SS	M25×1.5	M16×1.5	25	14	30	20	50
Exd-M25-M20-SS	M25×1.5	M20×1.5	25	14	30	20	50
Exd-M25-G1/2-SS	M25×1.5	G1/2	25	14	30	20	50
Exd-M25-NPT1/2-SS	M25×1.5	NPT1/2	25	14	30	20	50
Exd-M27-M20-SS	M27×1.5	M20×1.5	27	14	32	20	50
Exd-M27-M25-SS	M27×1.5	M25×1.5	27	14	32	20	50
Exd-M30-M20-SS	M30×1.5	M20×1.5	30	14	34	20	50
Exd-M30-M25-SS	M30×1.5	M25×1.5	30	14	34	20	50
Exd-M32-M16-SS	M32×1.5	M16×1.5	32	14	38	20	50
Exd-M32-M20-SS	M32×1.5	M20×1.5	32	14	38	20	50
Exd-M32-M25-SS	M32×1.5	M25×1.5	32	14	38	20	50
Exd-M36-M25-SS	M36×1.5	M25×1.5	36	14	42	20	50
Exd-M40-M20-SS	M40×1.5	M20×1.5	40	15	45	21	20
Exd-M40-M25-SS	M40×1.5	M25×1.5	40	15	45	21	20
Exd-M40-M32-SS	M40×1.5	M32×1.5	40	15	45	21	20
Exd-M50-M20-SS	M50×1.5	M20×1.5	50	15	55	21	20
Exd-M50-M25-SS	M50×1.5	M25×1.5	50	15	55	21	20
Exd-M50-M32-SS	M50×1.5	M32×1.5	50	15	55	21	20
Exd-M50-M40-SS	M50×1.5	M40×1.5	50	15	55	21	20
Exd-M63-M20-SS	M63×1.5	M20×1.5	63	15	68	21	10
Exd-M63-M25-SS	M63×1.5	M25×1.5	63	15	68	21	10
Exd-M63-M32-SS	M63×1.5	M32×1.5	63	15	68	21	10
Exd-M63-M40-SS	M63×1.5	M40×1.5	63	15	68	21	10
Exd-M63-M50-SS	M63×1.5	M50×1.5	63	15	68	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exe-G3/8-G1/4-SS	G3/8	G1/4	16.66	10	22	15	50
Exe-G1/2-G1/4-SS	G1/2	G1/4	20.95	14	24	20	50
Exe-G1/2-G3/8-SS	G1/2	G3/8	20.95	14	24	20	50
Exe-G1/2-M12-SS	G1/2	M12×1.5	20.95	14	24	20	50
Exe-G1/2-M16-SS	G1/2	M16×1.5	20.95	14	24	20	50
Exe-G1/2-PG7-SS	G1/2	PG7	20.95	14	24	20	50
Exe-G1/2-PG9-SS	G1/2	PG9	20.95	14	24	20	50
Exe-G1/2-PG11-SS	G1/2	PG11	20.95	14	24	20	50
Exe-G3/4-G1/2-SS	G3/4	G1/2	26.44	14	30	20	50
Exe-G3/4-M12-SS	G3/4	M12×1.5	26.44	14	30	20	50
Exe-G3/4-M16-SS	G3/4	M16×1.5	26.44	14	30	20	50
Exe-G3/4-M20-SS	G3/4	M20×1.5	26.44	14	30	20	50
Exe-G3/4-NPT1/2-SS	G3/4	NPT1/2	26.44	14	30	20	50
Exe-G3/4-PG7-SS	G3/4	PG7	26.44	14	30	20	50
Exe-G3/4-PG9-SS	G3/4	PG9	26.44	14	30	20	50
Exe-G3/4-PG11-SS	G3/4	PG11	26.44	14	30	20	50
Exe-G3/4-PG13.5-SS	G3/4	PG13.5	26.44	14	30	20	50
Exe-G3/4-PG16-SS	G3/4	PG16	26.44	14	30	20	50
Exe-G1-G1/2-SS	G1	G1/2	33.24	15	38	20	50
Exe-G1-G3/4-SS	G1	G3/4	33.24	15	38	20	50
Exe-G1-M12-SS	G1	M12×1.5	33.24	15	38	20	50
Exe-G1-M16-SS	G1	M16×1.5	33.24	15	38	20	50
Exe-G1-M20-SS	G1	M20×1.5	33.24	15	38	20	50
Exe-G1-M25-SS	G1	M25×1.5	33.24	15	38	20	50
Exe-G1-PG16-SS	G1	PG16	33.24	15	38	20	50
Exe-G1-PG21-SS	G1	PG21	33.24	15	38	20	50
Exe-G1-1/4-G1-SS	G1-1/4	G1	41.91	15	46	21	20
Exe-G1-1/2-G1-1/4-SS	G1-1/2	G1-1/4	47.8	15	55	21	20
Exe-G2-G1-SS	G2	G1	59.61	15	65	21	10
Exe-G2-G1-1/4-SS	G2	G1-1/4	59.61	15	65	21	10
Exe-G2-G1-1/2-SS	G2	G1-1/2	59.61	15	65	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exd-NPT3/8-NPT1/4-SS	NPT3/8	NPT1/4	16.66	10	22	15	50
Exd-NPT1/2-NPT1/4-SS	NPT1/2	NPT1/4	20.95	14	24	20	50
Exd-NPT1/2-NPT3/8-SS	NPT1/2	NPT3/8	20.95	14	24	20	50
Exd-NPT1/2-M12-SS	NPT1/2	M12×1.5	20.95	14	24	20	50
Exd-NPT1/2-M16-SS	NPT1/2	M16×1.5	20.95	14	24	20	50
Exd-NPT1/2-PG7-SS	NPT1/2	PG7	20.95	14	24	20	50
Exd-NPT1/2-PG9-SS	NPT1/2	PG9	20.95	14	24	20	50
Exd-NPT1/2-PG11-SS	NPT1/2	PG11	20.95	14	24	20	50
Exd-NPT3/4-NPT1/2-SS	NPT3/4	NPT1/2	26.44	14	30	20	50
Exd-NPT3/4-M12-SS	NPT3/4	M12×1.5	26.44	14	30	20	50
Exd-NPT3/4-M16-SS	NPT3/4	M16×1.5	26.44	14	30	20	50
Exd-NPT3/4-M20-SS	NPT3/4	M20×1.5	26.44	14	30	20	50
Exd-NPT3/4-G1/2-SS	NPT3/4	G1/2	26.44	14	30	20	50
Exd-NPT3/4-PG7-SS	NPT3/4	PG7	26.44	14	30	20	50
Exd-NPT3/4-PG9-SS	NPT3/4	PG9	26.44	14	30	20	50
Exd-NPT3/4-PG11-SS	NPT3/4	PG11	26.44	14	30	20	50
Exd-NPT3/4-PG13.5-SS	NPT3/4	PG13.5	26.44	14	30	20	50
Exd-NPT3/4-PG16-SS	NPT3/4	PG16	26.44	14	30	20	50
Exd-NPT1-NPT1/2-SS	NPT1	NPT1/2	33.24	15	38	20	50
Exd-NPT1-NPT3/4-SS	NPT1	NPT3/4	33.24	15	38	20	50
Exd-NPT1-M12-SS	NPT1	M12×1.5	33.24	15	38	20	50
Exd-NPT1-M16-SS	NPT1	M16×1.5	33.24	15	38	20	50
Exd-NPT1-M20-SS	NPT1	M20×1.5	33.24	15	38	20	50
Exd-NPT1-M25-SS	NPT1	M25×1.5	33.24	15	38	20	50
Exd-NPT1-PG16-SS	NPT1	PG16	33.24	15	38	20	50
Exd-NPT1-PG21-SS	NPT1	PG21	33.24	15	38	20	50
Exd-NPT1-1/4-NPT1-SS	NPT1-1/4	NPT1	41.91	15	46	21	20
Exd-NPT1-1/2-NPT1-1/4-SS	NPT1-1/2	NPT1-1/4	47.8	15	55	21	20
Exd-NPT2-NPT1-SS	NPT2	NPT1	59.61	15	65	21	10
Exd-NPT2-NPT1-1/4-SS	NPT2	NPT1-1/4	59.61	15	65	21	10
Exd-NPT2-NPT1-1/2-SS	NPT2	NPT1-1/2	59.61	15	65	21	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	W	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	Φ mm	mm	Pcs/bag
Exe-PG9-PG7-SS	PG9	PG7	15.2	10	18	15	50
Exe-PG9-M12-SS	PG9	M12×1.5	15.2	10	18	15	50
Exe-PG11-PG7-SS	PG11	PG7	18.6	11	22	16	50
Exe-PG11-PG9-SS	PG11	PG9	18.6	11	22	16	50
Exe-PG11-M12-SS	PG11	M12×1.5	18.6	11	22	16	50
Exe-PG13.5-PG7-SS	PG13.5	PG7	20.5	12	24	17	50
Exe-PG13.5-PG9-SS	PG13.5	PG9	20.5	12	24	17	50
Exe-PG13.5-PG11-SS	PG13.5	PG11	20.5	12	24	17	50
Exe-PG13.5-M12-SS	PG13.5	M12×1.5	20.5	12	24	17	50
Exe-PG13.5-M16-SS	PG13.5	M16×1.5	20.5	12	24	17	50
Exe-PG16-PG7-SS	PG16	PG7	22.5	12	26	17	50
Exe-PG16-PG9-SS	PG16	PG9	22.5	12	26	17	50
Exe-PG16-PG11-SS	PG16	PG11	22.5	12	26	17	50
Exe-PG16-PG13.5-SS	PG16	PG13.5	22.5	12	26	17	50
Exe-PG16-M12-SS	PG16	M12×1.5	22.5	12	26	17	50
Exe-PG16-M16-SS	PG16	M16×1.5	22.5	12	26	17	50
Exe-PG21-PG7-SS	PG21	PG7	28.3	14	32	20	50
Exe-PG21-PG9-SS	PG21	PG9	28.3	14	32	20	50
Exe-PG21-PG11-SS	PG21	PG11	28.3	14	32	20	50
Exe-PG21-PG13.5-SS	PG21	PG13.5	28.3	14	32	20	50
Exe-PG21-PG16-SS	PG21	PG16	28.3	14	32	20	50
Exe-PG21-M12-SS	PG21	M12×1.5	28.3	14	32	20	50
Exe-PG21-M16-SS	PG21	M16×1.5	28.3	14	32	20	50
Exe-PG21-M20-SS	PG21	M20×1.5	28.3	14	32	20	50
Exe-PG29-PG16-SS	PG29	PG16	37	14	42	20	20
Exe-PG29-PG21-SS	PG29	PG21	37	14	42	20	20
Exe-PG29-M20-SS	PG29	M20×1.5	37	14	42	20	20
Exe-PG29-M25-SS	PG29	M25×1.5	37	14	42	20	20
Exe-PG36-PG29-SS	PG36	PG29	47	15	55	21	10
Exe-PG42-PG36-SS	PG42	PG36	54	15	60	21	10
Exe-PG48-PG42-SS	PG48	PG42	59.3	15	65	21	10

铜镀镍扩径环

Copper nickel plated adapter connector


材料：黄铜镀镍

测试：IP68，CE



特性：采用优质铜镀镍制成，内外丝结构紧密，密封圈为NBR材质，耐油及一般溶剂，扩径环结构，适用于螺纹增大转接

说明：默认不附螺母，如需另行采购

LAND 蓝江

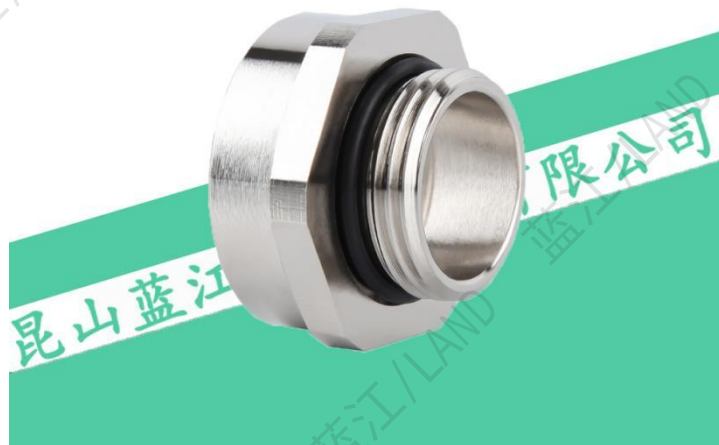

缩径环

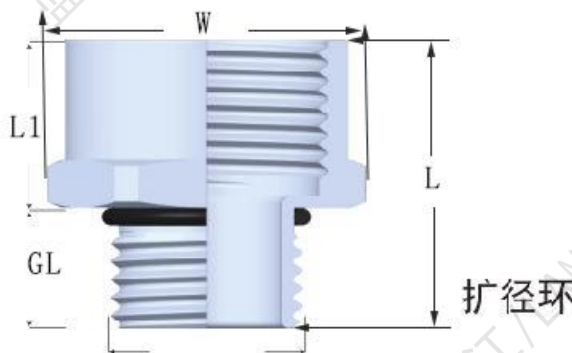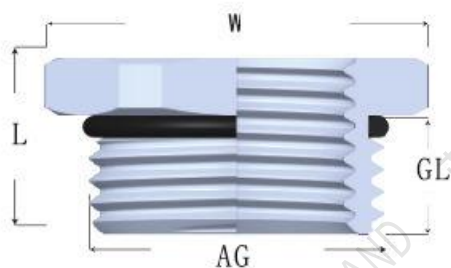

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, the inner and outer wire structures are tight, and the sealing ring is made of NBR material, which is resistant to oil and general solvents. The expansion ring structure is suitable for thread enlargement and adapter

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
M12-M16	M12×1.5	M16×1.5	12	6	20	18	100
M12-M20	M12×1.5	M20×1.5	12	6	20	22	100
M16-M20	M16×1.5	M20×1.5	16	6	20	22	100
M16-M25	M16×1.5	M25×1.5	16	6	23	27	100
M16-G1/2	M16×1.5	G1/2	16	6	20	22	100
M18-M20	M18×1.5	M20×1.5	18	6.5	22	22	100
M20-M24	M20×1.5	M24×1.5	20	7	23	27	50
M20-M25	M20×1.5	M25×1.5	20	8	23	27	50
M20-M30	M20×1.5	M30×2.0	20	8	23	32	50
M20-M32	M20×1.5	M32×1.5	20	7	22	34	50
M20-NPT1/2	M20×1.5	NPT1/2	20	7	23	22	50
M20-PG13.5	M20×1.5	PG13.5	20	7	23	22	50
M24-M25	M24×1.5	M25×1.5	24	7	25	27	50
M24-M27	M24×1.5	M27×2.0	24	7	25	30	50
M24-M30	M24×1.5	M30×2.0	24	7	25	32	50
M27-M32	M27×2.0	M32×1.5	27	7	25	36	50
M25-M30	M25×1.5	M30×2.0	25	8	23	32	50
M25-M32	M25×1.5	M32×1.5	25	9	25	36	50
M25-M40	M25×1.5	M40×1.5	25	8	25	45	50
M27-M36	M27×2.0	M36×2.0	27	8	24	40	50
M32-M40	M32×1.5	M40×1.5	32	9	26	45	50
M32-M50	M32×1.5	M40×1.5	32	9	26	55	20
M36-M48	M36×2.0	M48×2.0	36	9	26	50	20
M40-M50	M40×1.5	M50×1.5	40	10	27	55	20
M40-M63	M40×1.5	M63×1.5	40	10	28	67	20
M48-M63	M48×2.0	M63×1.5	48	10	28	67	10
M50-M63	M50×1.5	M63×1.5	50	10	29	67	10
M63-M72	M63×1.5	M72×2.0	63	10	29	75	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
PG7-PG9	PG7	PG9	12.5	6	19.5	18	50
PG9-PG11	PG9	PG11	15.2	7	21.5	22	50
PG9-PG13.5	PG9	PG13.5	15.2	7	21.5	22	50
PG9-PG16	PG9	PG16	15.2	7	23	24	50
PG11-PG13.5	PG11	PG13.5	18.6	7	22	22	50
PG11-PG16	PG11	PG16	18.6	7	22	25	50
PG13.5-PG16	PG13.5	PG16	20.5	8	23	24	50
PG16-PG21	PG16	PG21	22.5	8	23	30	50
PG16-PG29	PG16	PG29	22.5	8	23	40	50
PG21-PG29	PG21	PG29	28.3	8	25	40	50
PG29-PG36	PG29	PG36	37	10	27	50	20
PG36-PG42	PG36	PG42	47	10	29	60	20
PG42-PG48	PG42	PG48	54	11	31	65	10
G1/4-G3/8	G1/4	G3/8	13.15	7	21	20	10
G3/8-G1/2	G3/8	G1/2	16.66	7	21	24	50
G1/2-G3/4	G1/2	G3/4	20.95	7	21	30	50
G1/2-G1	G1/2	G1	20.95	7	21	36	50
G3/4-G1	G3/4	G1	26.44	7	21	36	50
G1-G1-1/4	G1	G1-1/4	33.24	9	24	45	50
G1-G1-1/2	G1	G1-1/2	33.24	9	26	55	50
G1-1/4-G1-1/2	G1-1/4	G1-1/2	41.91	9	26	55	50
G1-1/4-G2	G1-1/4	G2	41.91	10	28	65	50
G1-1/2-G2	G1-1/2	G2	47.8	10	28	65	50
NPT1/4-NPT3/8	NPT1/4	NPT3/8	13.15	7	21	20	10
NPT3/8-NPT1/2	NPT3/8	NPT1/2	16.66	7	21	24	50
NPT1/2-NPT3/4	NPT1/2	NPT3/4	20.95	7	21	30	50
NPT1/2-NPT1	NPT1/2	NPT1	20.95	7	21	36	50
NPT3/4-NPT1	NPT3/4	NPT1	26.44	7	21	36	50
NPT1-NPT1-1/4	NPT1	NPT1-1/4	33.24	9	24	45	50
NPT1-NPT1-1/2	NPT1	NPT1-1/2	33.24	9	26	55	50
NPT1-1/4-NPT1-1/2	NPT1-1/4	NPT1-1/2	41.91	9	26	55	50
NPT1-1/4-NPT2	NPT1-1/4	NPT2	41.91	10	28	65	50
NPT1-1/2-NPT2	NPT1-1/2	NPT2	47.8	10	28	65	50

铜镀镍缩径环

Copper nickel plated adapter connector


LAND 蓝江

材料：黄铜镀镍



测试：IP68，CE

特性：采用优质铜镀镍制成，内外丝结构紧密，密封圈为NBR材质，耐油及一般溶剂，缩径环结构，适用于螺纹减小转接

说明：默认不附螺母，如需另行采购

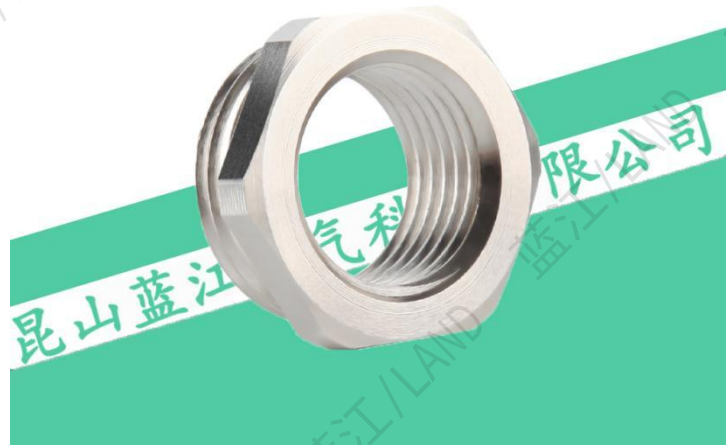

缩径环

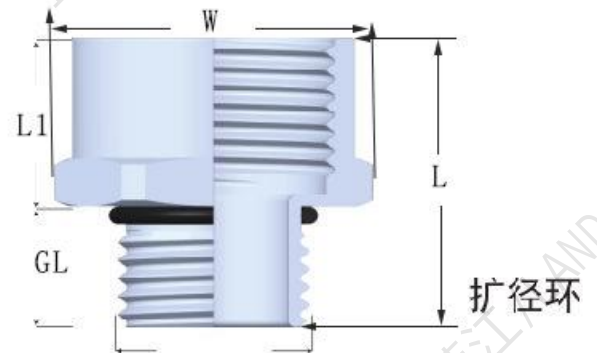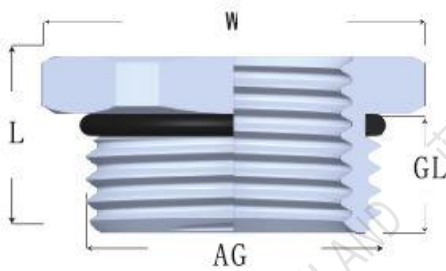

扩径环

Material: Nickel Plated Brass

Testing: IP68, CE

Features: Made of high-quality copper nickel plating, the inner and outer wire structures are tight, and the sealing ring is made of NBR material, which is resistant to oil and general solvents. The reduced diameter ring structure is suitable for thread reduction and adapter

Explanation: By default, nuts are not included. If you need to contact us, you will need to purchase separately

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
M16-M12	M16×1.5	M12×1.5	12	6	9	18	100
M18-M16	M18×1.5	M16×1.5	18	7	9	20	100
M20-M12	M20×1.5	M12×1.5	20	7	10	22	100
M20-M16	M20×1.5	M16×1.5	20	7	10	22	100
M20-M18	M20×1.5	M18×1.5	20	7	10	22	100
M24-M20	M24×1.5	M20×1.5	24	7	10	27	100
M25-M16	M25×1.5	M16×1.5	25	8	11	27	50
M25-M20	M25×1.5	M20×1.5	25	8	11	27	50
M27-M18	M27×2.0	M18×1.5	27	8	12	30	50
M27-M20	M27×2.0	M20×1.5	27	8	12	30	50
M27-M24	M27×2.0	M24×1.5	27	8	12	30	50
M30-M20	M30×2.0	M20×1.5	30	8	12	32	50
M30-M24	M30×2.0	M24×1.5	30	8	12	32	50
M30-M27	M30×2.0	M27×2.0	30	8	12	32	50
M32-M16	M32×1.5	M16×1.5	32	8	11.5	34	50
M32-M20	M32×1.5	M20×1.5	32	8	11.5	34	50
M32-M25	M32×1.5	M25×1.5	32	8	11.5	34	50
M32-M27	M32×1.5	M27×2.0	32	8	11.5	34	50
M36-M24	M36×2.0	M24×1.5	36	8	12	40	50
M36-M25	M36×2.0	M25×1.5	36	8	12	40	50
M36-M30	M36×2.0	M30×2.0	36	8	12	40	50
M40-M20	M40×1.5	M20×1.5	40	9	12.5	42	20
M40-M25	M40×1.5	M25×1.5	40	9	12.5	42	20
M40-M32	M40×1.5	M32×1.5	40	9	12.5	42	20
M50-M20	M50×1.5	M20×1.5	50	10	13.5	55	20
M50-M25	M50×1.5	M25×1.5	50	10	13.5	55	20
M50-M32	M50×1.5	M32×1.5	50	10	13.5	55	20
M50-M40	M50×1.5	M40×1.5	50	10	13.5	55	20
M63-M25	M63×1.5	M25×1.5	63	10	14.5	65	10
M63-M32	M63×1.5	M32×1.5	63	10	14.5	65	10
M63-M40	M63×1.5	M40×1.5	63	10	14.5	65	10
M63-M50	M63×1.5	M50×1.5	63	10	14.5	65	10
M75-M63	M75×2.0	M63×1.5	75	16	21	82	10

产品参数表

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size				包装
Product model	外螺纹	内螺纹	AG	GL	L	W	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Φ mm	Pcs/bag
PG9-PG7	PG9	PG7	15.2	6	10	18	50
PG11-PG9	PG11	PG9	18.6	6	10	20	50
PG13.5-PG9	PG13.5	PG9	20.5	7	10	22	50
PG13.5-PG11	PG13.5	PG11	20.5	7	10	22	50
PG16-PG9	PG16	PG9	22.5	7	10	24	50
PG16-PG11	PG16	PG11	22.5	7	10	24	50
PG16-PG13.5	PG16	PG13.5	22.5	7	10	24	50
PG21-PG9	PG21	PG9	28.3	7	11	30	50
PG21-PG11	PG21	PG11	28.3	7	11	30	50
PG21-PG13.5	PG21	PG13.5	28.3	7	11	30	50
PG21-PG16	PG21	PG16	28.3	7	11	30	50
PG29-PG16	PG29	PG16	37	8	12	40	50
PG29-PG21	PG29	PG21	37	8	12	40	50
PG36-PG29	PG36	PG29	47	9	13	50	20
PG42-PG36	PG42	PG36	54	10	14	60	20
PG48-PG36	PG48	PG36	59.3	10	15	65	10
PG48-PG42	PG48	PG42	59.3	10	15	65	10
G3/8-G1/4	G3/8	G1/4	16.66	6	10	20	50
G1/2-G3/8	G1/2	G3/8	20.95	7	10	24	50
G3/4-G1/2	G3/4	G1/2	26.44	7	10	30	50
G1-G3/4	G1	G3/4	33.24	8	12	36	50
G1-1/4-G1	G1-1/4	G1	41.91	9	12	45	25
G1-1/2-G1-1/4	G1-1/2	G1-1/4	47.8	10	14	50	20
G2-G1	G2	G1	59.61	10	14	65	10
G2-G1-1/2	G2	G1-1/2	59.61	10	14	65	10
NPT3/8-NPT1/4	NPT3/8	NPT1/4	16.66	6	10	20	50
NPT1/2-NPT3/8	NPT1/2	NPT3/8	20.95	7	10	24	50
NPT3/4-NPT1/2	NPT3/4	NPT1/2	26.44	7	10	30	50
NPT1-NPT3/4	NPT1	NPT3/4	33.24	8	12	36	50
NPT1-1/4-NPT1	NPT1-1/4	NPT1	41.91	9	12	45	25
NPT1-1/2-NPT1-1/4	NPT1-1/2	NPT1-1/4	47.8	10	14	50	20
NPT2-NPT1	NPT2	NPT1	59.61	10	14	65	10
NPT2-NPT1-1/2	NPT2	NPT1-1/2	59.61	10	14	65	10

铜镀镍对接环

Copper nickel plated adapter connector



材料：黄铜镀镍

测试：IP68，CE

特性：双内丝结构，用于螺纹连接

Material: Nickel Plated Brass

Testing: IP68，CE

Features: used for threaded connections



蓝江产品型号	内螺纹规格	产品尺寸/Product size		包装
Product model	internal thread	总长 L	对边 W	packing
PN.	M/PG/G	Φ mm	Φ mm	Pcs/bag
M12F-M12F	M12×1.5	16	14	50
M16F-M16F	M16×1.5	18	18	50
M18F-M18F	M18×1.5	22	21	50
M20F-M20F	M20×1.5	22	23	50
M24F-M24F	M24×1.5	22	27	50
M25F-M25F	M25×1.5	22	28	50
M27F-M27F	M27×2.0	22	30	20
M32F-M32F	M32×1.5	24	36	20
M36F-M36F	M36×2.0	28	40	20
M40F-M40F	M40×1.5	30	45	10
M48F-M48F	M48×2.0	35	52	10
M50F-M50F	M50×1.5	35	55	10
M63F-M63F	M63×1.5	42	70	10
G1/4F-G1/4F	G1/4	18	17	50
G3/8F-G3/8F	G3/8	18	20	50
G1/2F-G1/2F	G1/2	24	24	50
G3/4F-G3/4F	G3/4	24	30	50
G1F-G1F	G1	24	38	20
G1-1/4F-G1-1/4F	G1-1/4	26	45	20
G1-1/2F-G1-1/2F	G1-1/2	30	52	20
G2F-G2F	G2	38	65	10
G2-1/2F-G2-1/2F	G2-1/2	38	80	10
G3F-G3F	G3	35	100	10

尼龙扩径环


Nylon adapter connector

材料：尼龙/Nylon

温度：-40° C~100° C

颜色：黑色，浅灰色

防水：配合密封圈时可达IP68

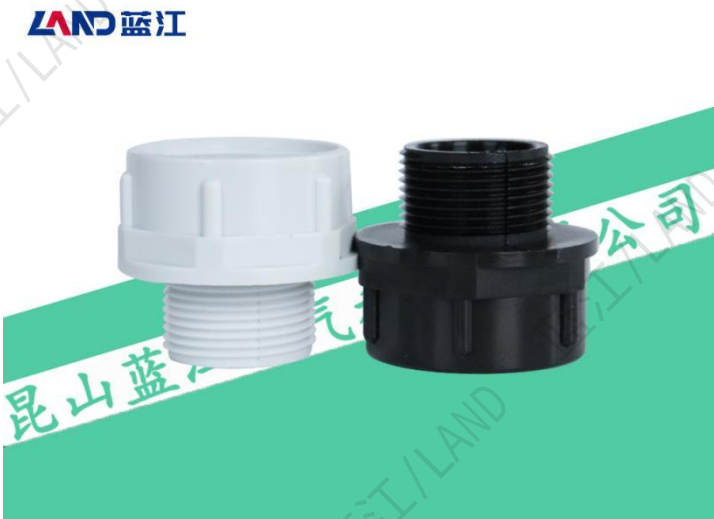

Material：Nylon/Nylon

Temperature：- 40° C~100° C

Color：Black, Light Grey

Waterproof：up to IP68 when combined with a sealing ring

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size			包装
Product model	外螺纹	内螺纹	AG	GL	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Pcs/bag
M12-M16	M12×1.5	M16×1.5	12	8	22	100
M16-M20	M16×1.5	M20×1.5	16	10	27	100
M16-M25	M16×1.5	M25×1.5	16	10	27	100
M16-M27	M16×1.5	M27×2.0	16	10	27	100
M16-PG16	M16×1.5	PG6	16	10	27	100
M20-M25	M20×1.5	M25×1.5	20	8	25	50
M25-M32	M25×1.5	M32×1.5	25	14	34	50
M32-M40	M32×1.5	M40×1.5	32	14	34	50
M40-M50	M40×1.5	M50×1.5	40	14	37	25
M50-M63	M50×1.5	M63×1.5	50	15	40	20
PG9-PG11	PG9	PG11	15.2	10	24	100
PG9-PG16	PG9	PG16	15.2	10	27	100
PG11-M20	PG11	M20×1.5	18.6	8	25	100
PG13.5-PG16	PG13.5	PG16	20.5	8	25	100
PG16-PG21	PG16	PG21	22.5	10	27	100

尼龙缩径环

Nylon adapter connector



材料：尼龙/Nylon

温度：-40° C~100° C

颜色：黑色，浅灰色

防水：配合密封圈时可达IP68

Description: Made of nylon, with a sealing ring, waterproof up to IP68



蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size			包装
Product model	外螺纹	内螺纹	AG	GL	L	packing
PN.	M thread	F thread	Φ mm	Φ mm	mm	Pcs/bag
M16-M12	M16×1.5	M12×1.5	16	9	15	50
M20-M12	M20×1.5	M12×1.5	20	9	15	50
M20-M16	M20×1.5	M16×1.5	20	9	15	50
M20-PG9	M20×1.5	PG9	20	9	15	50
M20-PG11	M20×1.5	PG11	20	8	22	50
M25-M20	M25×1.5	M20×1.5	25	9.5	26	50
M27-M16	M27×2.0	M16×1.5	27	9	15	50
M30-M16	M30×2.0	M16×1.5	30	14.5	24.5	50
M32-M20	M32×1.5	M20×1.5	32	11.5	17	50
M36-M32	M36×2.0	M32×1.5	36	11.5	17.5	50
M40-M25	M40×1.5	M25×1.5	40	11	17	20
M40-M32	M40×1.5	M32×1.5	40	11	17	20
M50-M40	M50×1.5	M40×1.5	50	15	20	10
M50-M32	M50×1.5	M32×1.5	50	15	20	10
M63-M50	M63×1.5	M50×1.5	63	15	20	10
PG11-PG9	PG11	PG9	18.6	9	15	50
PG13.5-PG9	PG13.5	PG9	20.5	9	15	50
PG13.5-PG11	PG13.5	PG11	20.5	9	15	50
PG16-PG11	PG16	PG11	22.5	10	27	50
PG16-PG13.5	PG16	PG13.5	22.5	10	27	50
PG16-M16	PG16	M16×1.5	22.5	10	7	50
PG21-PG16	PG21	PG16	28.3	11	17	50
PG29-PG21	PG29	PG21	37	11	17	50


尼龙对接环

Nylon adapter connector

材料：尼龙/Nylon

测试：IP68，CE，ROHS

特性：采用优质尼龙原料制成，可选黑色或浅灰色

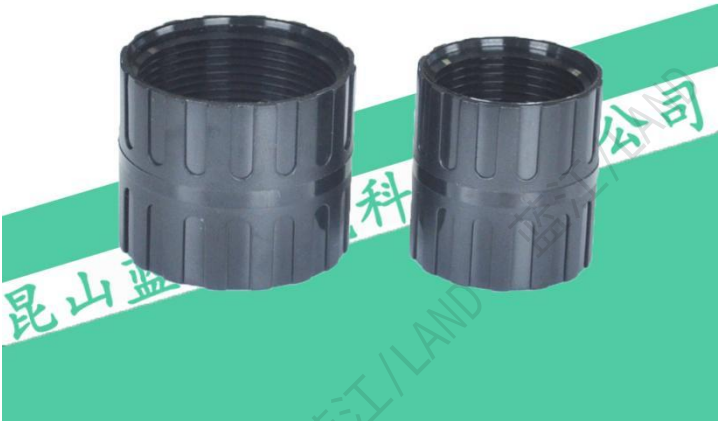

Description: Made of high-quality nylon raw materials, available in black or light gray, and does not come with nuts by default

蓝江产品型号	螺纹规格/Thread size		产品尺寸 / Product size		包装
Product model	内螺纹1	内螺纹2	AG	总长L	packing
PN.	F thread	F thread	Φ mm	mm	Pcs/bag
M16F-M16F	M16×1.5	M16×1.5	16	31.5	50
M20F-M20F	M20×1.5	M20×1.5	20	31.5	50
M25F-M25F	M25×1.5	M25×1.5	25	31.5	50
M32F-M32F	M32×1.5	M32×1.5	32	31.5	50
M40F-M40F	M40×1.5	M40×1.5	40	31.5	50
M50F-M50F	M50×1.5	M50×1.5	50	35	20
M63F-M63F	M63×1.5	M63×1.5	63	35	20

不锈钢锁紧螺母

Stainless steel locking nut



LAND 蓝江

材料：304不锈钢，可选316或316L

颜色：银色

性能：外形美观，螺纹精密，耐腐蚀，耐酸碱

作用：为格兰头，闷盖等与设备连接提供锁紧支持

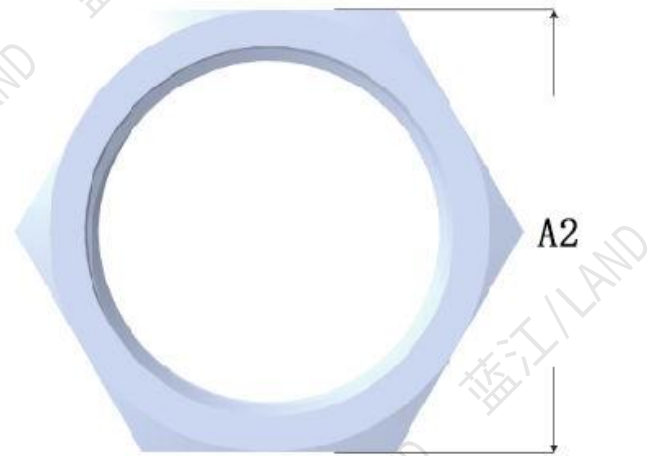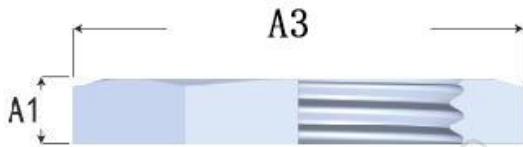

Material: 304, optional 316 or 316L

Color: Silver

Performance: Beautiful appearance, precise threads, corrosion resistance, acid and alkali resistance

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12-SS	M12×1.5	15	3	100
L-M16-SS	M16×1.5	20	3.5	100
L-M18-SS	M18×1.5	21	3.5	100
L-M20-SS	M20×1.5	24	3.5	100
L-M22-SS	M22×1.5	26	3.5	100
L-M24-SS	M24×1.5	28	3.5	100
L-M25-SS	M25×1.5	30	4	100
L-M27-SS	M27×1.5	30	4	100
L-M30-SS	M30×1.5	34	4	100
L-M32-SS	M32×1.5	38	5	50
L-M33-SS	M33×2.0	38	5	50
L-M36-SS	M36×1.5	42	5	50
L-M40-SS	M40×1.5	46	5	50
L-M42-SS	M42×2.0	48	5	50
L-M48-SS	M48×2.0	58	5	50
L-M50-SS	M50×1.5	58	5	50
L-M63-SS	M63×1.5	71	6	20
L-M64-SS	M64×1.5	71	6	20
L-PG7-SS	PG7	15	3	100
L-PG9-SS	PG9	17	3	100
L-PG11-SS	PG11	22	3.5	100
L-PG13.5-SS	PG13.5	24	3.5	100
L-PG16-SS	PG16	26	3.5	100
L-PG21-SS	PG21	32	4	100
L-PG29-SS	PG29	40	5	100
L-PG36-SS	PG36	58	5.5	50
L-PG42-SS	PG42	60	6	50
L-PG48-SS	PG48	71	6	20
L-G1/4-SS	G1/4	15	3	100
L-G3/8-SS	G3/8	22	3.5	100
L-G1/2-SS	G1/2	24	3.5	100
L-G3/4-SS	G3/4	30	4	100
L-G1-SS	G1	38	5	100
L-G1-1/4-SS	G1-1/4	48	5	50
L-G1-1/2-SS	G1-1/2	55	5.5	50
L-G2-SS	G2	71	6	20

铜镀镍锁紧螺母

Copper nickel plated locking nut



材料：黄铜镀镍

颜色：银色

性能：外形美观，螺纹精密，耐腐蚀，耐酸碱

作用：为格兰头，闷盖等与设备连接提供锁紧支持



Material: Nickel plated brass

Color: Silver

Performance: Beautiful appearance, precise threads, corrosion resistance, acid and alkali resistance

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M10	M10×1.5	12	2.5	100
L-M12	M12×1.5	15	2.8	100
L-M16	M16×1.5	19	2.8	100
L-M18	M18×1.5	21	3	100
L-M20	M20×1.5	23	3	100
L-M22	M22×1.5	26	3	100
L-M24	M24×1.5	28	3.5	100
L-M25	M25×1.5	30	3.5	100
L-M27	M27×1.5	32	4	100
L-M30	M30×1.5	34	4	100
L-M32	M32×1.5	36	4	50
L-M33	M33×2.0	36	4	50
L-M36	M36×1.5	40	4	50
L-M40	M40×1.5	45	5	50
L-M42	M42×2.0	46	5	50
L-M48	M48×2.0	55	5	50
L-M50	M50×1.5	55	5	50
L-M56	M56×2.0	60	5	50
L-M60	M60×2.0	65	5	50
L-M63	M63×1.5	70	6	20
L-M64	M64×1.5	70	6	20
L-PG7	PG7	15	2.8	100
L-PG9	PG9	18	2.8	100
L-PG11	PG11	21	3	100
L-PG13.5	PG13.5	23	3	100
L-PG16	PG16	26	3	100
L-PG21	PG21	32	3.5	100
L-PG29	PG29	40	4	100
L-PG36	PG36	50	5	50
L-PG42	PG42	60	5	50
L-PG48	PG48	65	5.5	20
L-G1/4	G1/4	15	2.8	100
L-G3/8	G3/8	20	3	100
L-G1/2	G1/2	20	4	100
L-G3/4	G3/4	30	4	100
L-G1	G1	40	5	100
L-G1-1/4	G1-1/4	50	5	50
L-G1-1/2	G1-1/2	55	6	50
L-G2	G2	65	6	20

尼龙锁紧螺母

Nylon locking nut



LAND 蓝江

材料：尼龙

颜色：黑色，灰白色

环保：ROHS

作用：为格兰头，闷盖等与设备连接提供锁紧支持

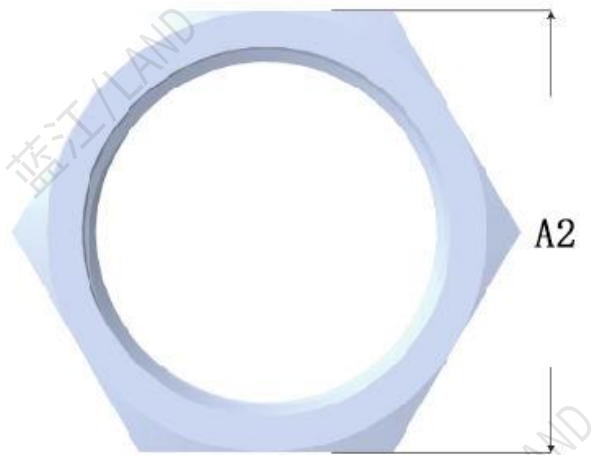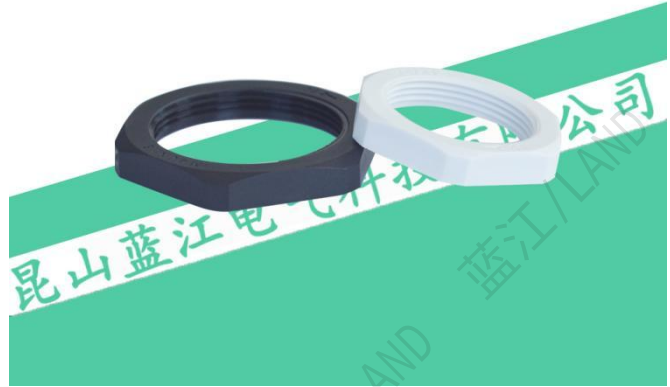

Material: Nylon

Color: Black, Grey White

environment protection ROHS

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A1	厚度 A2	packing
PN. (B黑 G浅灰)	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12B(G)	M12×1.5	19	5	100
L-M16B(G)	M16×1.5	22	5	100
L-M18B(G)	M18×1.5	24	5	100
L-M20B(G)	M20×1.5	27	6	100
L-M22B(G)	M22×1.5	30	6	100
L-M24B(G)	M24×1.5	30	6	100
L-M25B(G)	M25×1.5	32	6	100
L-M27B(G)	M27×1.5	36	7	100
L-M30B(G)	M30×1.5	36	7	100
L-M32B(G)	M32×1.5	40	7	50
L-M33B(G)	M33×2.0	40	7	50
L-M36B(G)	M36×1.5	45	7	50
L-M40B(G)	M40×1.5	49	8	50
L-M42B(G)	M42×2.0	53	8	50
L-M48B(G)	M48×2.0	60	8	50
L-M50B(G)	M50×1.5	60	8	50
L-M56B(G)	M56×2.0	65	8	50
L-M63B(G)	M63×1.5	75	8	20
L-M64B(G)	M64×1.5	75	8	20
L-PG7B(G)	PG7	19	5	100
L-PG9B(G)	PG9	22	5	100
L-PG11B(G)	PG11	24	5	100
L-PG13.5B(G)	PG13.5	27	6	100
L-PG16B(G)	PG16	30	6	100
L-PG21B(G)	PG21	36	7	100
L-PG29B(G)	PG29	45	7	100
L-PG36B(G)	PG36	60	8	50
L-PG42B(G)	PG42	65	8	50
L-PG48B(G)	PG48	70	8	20
L-G1/4B(G)	G1/4	19	5	100
L-G3/8B(G)	G3/8	24	5	100
L-G1/2B(G)	G1/2	27	6	100
L-G3/4B(G)	G3/4	36	7	100
L-G1B(G)	G1	45	7	100
L-G1-1/4B(G)	G1-1/4	60	8	50
L-G1-1/2B(G)	G1-1/2	65	8	50
L-G2B(G)	G2	70	8	20

铝制锁紧螺母

Aluminium locking nut

LAND 蓝江

材料：6061铝

颜色：银色

性能：轻量化设计，表面处理耐腐蚀

作用：为格兰头，闷盖等与设备连接提供锁紧支持



Material: 6061 aluminum

Color: Silver

Performance: Lightweight design, corrosion-resistant surface treatment

Function: Provide locking support for connecting gland heads, covers, etc. with equipment

产品参数表

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
L-M12-AL	M12×1.5	15	3	100
L-M16-AL	M16×1.5	20	3.5	100
L-M18-AL	M18×1.5	21	3.5	100
L-M20-AL	M20×1.5	24	3.5	100
L-M22-AL	M22×1.5	26	3.5	100
L-M24-AL	M24×1.5	28	3.5	100
L-M25-AL	M25×1.5	30	4	100
L-M27-AL	M27×1.5	30	4	100
L-M30-AL	M30×1.5	34	4	100
L-M32-AL	M32×1.5	38	5	50
L-M33-AL	M33×2.0	38	5	50
L-M36-AL	M36×1.5	42	5	50
L-M40-AL	M40×1.5	46	5	50
L-M42-AL	M42×2.0	48	5	50
L-M48-AL	M48×2.0	58	5	50
L-M50-AL	M50×1.5	58	5	50
L-M63-AL	M63×1.5	71	6	20
L-M64-AL	M64×1.5	71	6	20
L-PG7-AL	PG7	15	3	100
L-PG9-AL	PG9	17	3	100
L-PG11-AL	PG11	22	3.5	100
L-PG13.5-AL	PG13.5	24	3.5	100
L-PG16-AL	PG16	26	3.5	100
L-PG21-AL	PG21	32	4	100
L-PG29-AL	PG29	40	5	100
L-PG36-AL	PG36	58	5.5	50
L-PG42-AL	PG42	60	6	50
L-PG48-AL	PG48	71	6	20
L-G1/4-AL	G1/4	15	3	100
L-G3/8-AL	G3/8	22	3.5	100
L-G1/2-AL	G1/2	24	3.5	100
L-G3/4-AL	G3/4	30	4	100
L-G1-AL	G1	38	5	100
L-G1-1/4-AL	G1-1/4	48	5	50
L-G1-1/2-AL	G1-1/2	55	5.5	50
L-G2-AL	G2	71	6	20

铜镀镍屏蔽螺母

Copper nickel plated locking nut



材料：黄铜镀镍

性能：带齿屏蔽特性

作用：为格兰头，闷盖等与设备连接提供锁紧支持，具有一定的屏蔽作用



Material: Nickel plated brass

Performance: Toothed shielding characteristics

Function: Provide locking support for connecting gland heads, covers, and other devices, and have a certain shielding effect

蓝江产品型号	螺纹规格	产品尺寸/Product size		包装
Product model	Thread size	对边 A2	厚度 A1	packing
PN.	M/PG/G/NPT	mm	mm	Pcs/bag
EC-L-M12	M12×1.5	15	3.8	100
EC-L-M16	M16×1.5	19	3.8	100
EC-L-M20	M20×1.5	23	4	100
EC-L-M25	M25×1.5	30	4.5	100
EC-L-M32	M32×1.5	36	5	50
EC-L-M40	M40×1.5	45	6	50
EC-L-M50	M50×1.5	55	6	50
EC-L-M63	M63×1.5	70	7	20

夹紧圈橡胶塞棒

Rubber waterproof plug

LAND 蓝江


材料：三元乙丙/EPDM

防护：IP68


温度：-40℃~105℃

阻燃：UL94V-2（可定制V0级）

说明：SPR仅限单孔接头，SPM适用于单孔及多孔

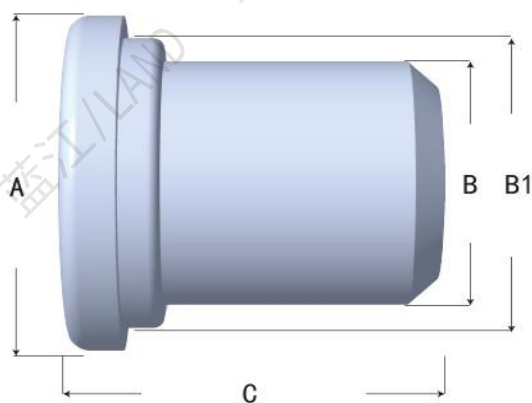

SPR型塞棒

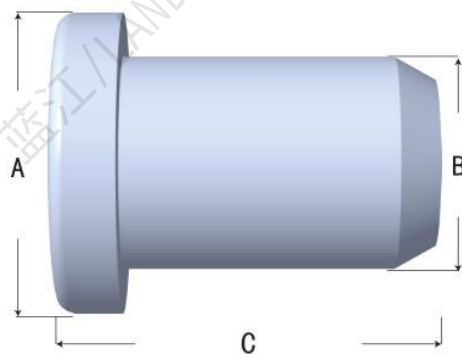

SPM橡胶塞棒

Material: EPDM

Protection: IP68

Temperature:- 40℃~105℃

Flame retardant: UL94V-2

Description: SPR is only applicable to single hole cable glands, SPM is suitable for single hole and multi hole cable glands

产品参数表/SPR

蓝江产品型号	产品尺寸/Product size				包装
Product model	A	B	B1	C	packing
PN.	Φ mm	Φ mm	Φ mm	L mm	Pcs/bag
SPR-055A	12	5.5	8.6	18	1000
SPR-070	13	7	10.5	18	1000
SPR-079	11	7.9	9	18	1000
SPR-092	15.5	9.2	12.5	18	1000
SPR-105	17	10.5	14.2	18	500
SPR-120	15.6	11.6	12.3	18	500
SPR-140	17	13.6	14.2	17.5	500
SPR-158	22	15.8	19	18	500
SPR-178	22	17.8	19	19	500
SPR-215	28	21.5	25	18	100
SPR-245	28	24.2	25	18	100
SPR-280	32	28.3	30	20.5	100
SPR-306	36	30.6	33	21	100
SPR-330	45	33.2	4	20	50
SPR-410	46	41	44	19.5	50

·产品参数表/SPM

蓝江产品型号	产品尺寸/Product size			包装
Product model	A	B	C	packing
PN.	Φ mm	Φ mm	L mm	Pcs/bag
SPM-025	4	2.5	14	1000
SPM-034	4.4	3.5	14	1000
SPM-050	6	5	15	1000
SPM-060	7.5	6.5	15.5	1000
SPM-070	8.5	7	15	1000
SPM-080	9.5	8	16	1000
SPM-100	11.5	10	15	1000

T型夹紧圈橡胶塞棒

T Rubber waterproof plug

材料：改性橡胶

颜色：黑色


防护：IP68

温度：-40℃~105℃

性能：耐油

说明：用于防水接头未穿线时堵孔，防水防尘

LAND 蓝江

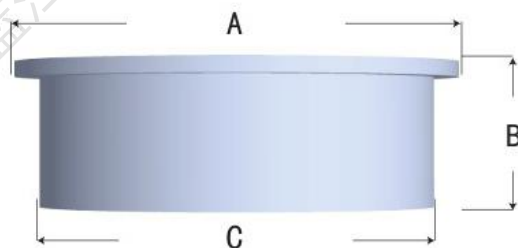

SPT橡胶塞棒

Material: Modified rubber

Colour: Black

Protection: IP68

Temperature:- 40℃~105℃

Performance: Oil resistant

Description: Used for waterproof and dustproof cable glands

产品参数表/SPT

蓝江产品型号	产品尺寸/Product size			包装
Product model	A	B	C	packing
PN.	Φ mm	Φ mm	L mm	Pcs/bag
SPT-2.5	3.5	5	2.5	1000
SPT-3.5	4.5	5	3.5	1000
SPT-5	6	5	5	1000
SPT-5.5	6.5	5	5.5	1000
SPT-6	7	5	6	1000
SPT-6.5	7.5	8	6.5	1000
SPT-7	8	5	7	1000
SPT-8	9.5	5	8	1000
SPT-9	10.5	5	9	1000
SPT-10	11.5	5	10	1000
SPT-12	13.5	6	12	500
SPT-14	15.5	6	14	500
SPT-16	17.5	9	16	500
SPT-18	19.5	9	18	500
SPT-21	23	10	21	500
SPT-22	24	10	22	500
SPT-23	25	10	23	500
SPT-25	27.5	10	25	500
SPT-27	29.5	10	27	500
SPT-30	32.5	10	30	500
SPT-31	35	10	31	500
SPT-32	36	10	32	500
SPT-36	40	10	36	500
SPT-37	41	10	37	500
SPT-38	41.5	10	38	100
SPT-41	45	10	41	100
SPT-44	47.5	10	44	100
SPT-53	57	12	53	100
SPT-57	61	12	57	100

T型夹紧圈不锈钢塞棒

Rubber waterproof stainless steel plug



材料：304不锈钢

温度：依据不锈钢特性

性能：耐腐蚀，耐油，耐酸碱，阻燃

说明：适用于防水接头未穿线时堵孔，防水防尘



Material: SUS304

Temperature: Based on the characteristics of stainless steel

Performance: Blocking holes for waterproofing and dust prevention

Description: Suitable for blocking holes when waterproof cable glands are not threaded, waterproof and dustproof

产品参数表/SPM-SS

蓝江产品型号	产品尺寸 / Product size				包装
Product model	A	B	C	L	packing
PN.	φ mm	φ mm	L mm	L mm	Pcs/bag
SPM-4-SS	6	4	10	12	100
SPM-6-SS	8	6	10	12	100
SPM-8-SS	10	8	10	12	100
SPM-10-SS	12	10	10	12	100
SPM-12-SS	14	12	10	12	100
SPM-14-SS	16	14	10	12	100
SPM-16-SS	18	16	10	12	100
SPM-18-SS	20	18	10	12	100
SPM-22-SS	24	22	10	12	100
SPM-25-SS	27	25	10	12	100
SPM-30-SS	30	30	10	12	50
SPM-32-SS	34	32	10	12	50
SPM-38-SS	40	38	10	12	50
SPM-40-SS	42	40	10	12	20
SPM-44-SS	46	44	10	12	20
SPM-50-SS	52	50	10	12	20

防尘塑料堵头

Dustproof plastic plug



材料：尼龙

温度：-40℃~105℃

性能：耐油，防尘，防水

说明：适用于防水接头未穿线时堵孔，防水防尘



Material: Nylon

Temperature: -40℃~105℃

Performance: Oil resistant, dustproof, waterproof

Description: Suitable for blocking holes when waterproof cable glands are not threaded, waterproof and dustproof

产品参数表/SPQ

蓝江产品型号	产品尺寸/Product size				包装
Product model	A	B	C	L	packing
PN.	Φ mm	Φ mm	L mm	L mm	Pcs/bag
SPQ-6	9.3	6	5	6.2	1000
SPQ-8	10	8	10	13.6	1000
SPQ-10	12.7	10	10	14	1000
SPQ-12	14.8	12	10	14.5	500
SPQ-14	16	14	10	15	500
SPQ-18	21	18	10	16	500
SPQ-25	28	25	14	21	500
SPQ-31	36	31	17	28	100
SPQ-32	37	32	17	28	100
SPQ-38	42.4	38	18	33	100
SPQ-41	45	41	16	29	50
SPQ-44	48	44	17	30	50
SPQ-45	48	45	17	30	50
SPQ-51	55	51	17	30	50

单孔防水密封圈

Waterproof sealing ring

材料: 三元乙丙/尼龙

颜色: 黑色

结构: 单孔型

温度: -40℃~100℃

说明: 外形美观, 尼龙与EPDM相契合, 适配

蓝江品牌分体类格兰头, 锁紧密封电缆, 并且

防护等级可达IP68

订购: 本产品仅承诺蓝江品牌产品适配, 不代表其他品牌可以配套使用, 请知悉

LAND 蓝江



Material: EPDM/Nylon

Color: Black

Structure: Single hole type

Temperature:- 40℃~100℃

Description: Beautiful appearance, compatible with nylon and EPDM Land brand split type gland head, locked and sealed cable, and The protection level can reach IP68

Order: This product only promises to be compatible with Blue River brand products and does not represent compatibility with other brands. Please be aware

产品尺寸表

蓝江产品型号	产品尺寸/Product size			整袋包装
Product Model	Φ A	Φ B	L	packing
PN.	Φ mm	Φ mm	mm	Pcs/bag
QM10-06B	10.2±0.5	6.7±0.5	14.1±0.5	1000
QM12-08B	12.1±0.5	8±0.5	16±0.5	1000
QM12-05B	12.1±0.5	5.5±0.5	16.5±0.5	1000
QM16-10B	16±0.5	10±0.5	19.5±0.5	1000
QM16-07B	16±0.5	7±0.5	20.5±0.5	1000
QM20-14B	20±0.5	14±0.5	22±0.5	500
QM20S-12B	18±0.5	12±0.5	20.5±0.5	500
QM20S-09B	18±0.5	9±0.5	20.5±0.5	500
QMG25-18B	25.5±0.5	18±0.5	23±0.5	200
QMG25-16B	25.5±0.5	16±0.5	23±0.5	200
QMG32-25B	33±0.5	25±0.5	24±0.5	100
QMG32-22B	33±0.5	22±0.5	24±0.5	100
QMG40-31B	41.5±1	32±1	31.8±1	50
QMG40-25B	41.5±1	25±1	31.8±1	50
QMG50-41B	51±1	41±1	35±1	50
QMG50-33B	51±1	32±1	35±1	50
QMG63-51B	66±1	53±1	38±1	50
QMG63-46B	66±1	46±1	38±1	50
QM63S-44B	56±1	44±1	38±1	50
QMG75-66B	78±2	66±2	42±2	10
QMG75-60B	78±2	60±2	42±2	10
QMG75-58B	78±2	58±2	42±2	10
QMG90-77B	95±2	80±2	45±2	10
QMG90-68B	95	68±2	45±2	10

防水多孔密封圈

Waterproof sealing ring

材料: 三元乙丙/尼龙

颜色: 黑色

结构: 多孔型

温度: -40°C~100°C

说明: 外形美观, 尼龙与EPDM相契合, 适配

蓝江品牌分体类格兰头, 锁紧密封电缆, 并且

防护等级可达IP68

订购: 本产品仅承诺蓝江品牌产品适配, 不代表其他品牌可以配套使用, 请知悉

Material: EPDM/Nylon

Color: Black

Structure: Single hole type

Temperature:- 40°C~100°C

Description: Beautiful appearance, compatible with nylon and EPDM Land brand split type gland head, locked and sealed cable, and The protection level can reach IP68

Order: This product only promises to be compatible with Blue River brand products and does not represent compatibility with other brands. Please be aware

LAND 蓝江



产品尺寸表

蓝江产品型号	适配蓝江接头	电缆范围	整袋包装
Product model	Adapt cable gland	Cable range	packaging
PN.	Metric	Φ mm	PCS
QM12-H2-03	M12×1.5	1.5~3	50
QM12-H3-02	M12×1.5	1~2.6	50
QM12-H4-02	M12×1.5	1~2.3	50
QM16-H2-02	M16×1.5	1.5~2.6	50
QM16-H2-04	M16×1.5	2~4	50
QM16-H3-03	M16×1.5	1.5~3	50
QM16-H3-04	M16×1.5	2~4	50
QM16-H4-03	M16×1.5	1.5~3	50
QM16-H6-02	M16×1.5	1~2.1	50
QM16-H8-02	M16×1.5	1~2.1	50
QM20S-H2-05	M20×1.5	2~5	50
QM20S-H3-05	M20×1.5	2~5	50
QM20S-H4-04	M20×1.5	2~4	50
QM20-H2-03	M20×1.5	1.5~3	50
QM20-H2-04	M20×1.5	2~4	50
QM20-H2-05	M20×1.5	2~5	50
QM20-H2-06	M20×1.5	3~6	50
QM20-H3-03	M20×1.5	1.5~3	50
QM20-H3-05	M20×1.5	2~5	50
QM20-H3-06	M20×1.5	3~6	50
QM20-H4-03	M20×1.5	1~2.5	50
QM20-H4-04	M20×1.5	1.5~3.5	50
QM20-H4-05	M20×1.5	2~4.5	50
QM20-H5-03	M20×1.5	1.5~3	50
QM20-H5-04	M20×1.5	2~4	50
QM20-H6-03	M20×1.5	2~3.5	50
QM20-H6-04	M20×1.5	2~4	50
QM25-H2-05	M25×1.5	3~5.5	50
QM25-H2-06	M25×1.5	3~6	50
QM25-H2-08	M25×1.5	5~8	50
QM25-H3-05	M25×1.5	2~5	50
QM25-H3-06	M25×1.5	3~6	50
QM25-H3-07	M25×1.5	4~7	50

QM25-H3-08	M25×1.5	5~8	50
QM25-H4-05	M25×1.5	2~5	50
QM25-H4-06	M25×1.5	3~6	50
QM25-H4-07	M25×1.5	4~7	50
QM25-H4-08	M25×1.5	5~8	50
QM25-H5-05	M25×1.5	3~5	50
QM25-H5-06	M25×1.5	4~6	50
QM25-H6-05	M25×1.5	3~5	50
QM25-H7-04	M25×1.5	2~4	50
QM25-H8-04	M25×1.5	2~4	50
QM32-H2-10	M32×1.5	6~10	20
QM32-H2-12	M32×1.5	9~12	20
QM32-H3-10	M32×1.5	6~10	20
QM32-H4-07	M32×1.5	4~7	20
QM32-H4-09	M32×1.5	6~9	20
QM32-H5-08	M32×1.5	5~8	20
QM32-H6-05	M32×1.5	3~5	20
QM32-H6-07	M32×1.5	4~7	20
QM32-H7-06	M32×1.5	4~6	20
QM32-H8-05	M32×1.5	3~5	20
QM40-H2-13	M40×1.5	9~13	10
QM40-H3-11	M40×1.5	8~11	10
QM40-H3-13	M40×1.5	10~13	10
QM40-H3-14	M40×1.5	11~14	10
QM40-H4-11	M40×1.5	8~11	10
QM40-H4-12	M40×1.5	9~12	10
QM40-H5-08	M40×1.5	5~8	10
QM40-H6-08	M40×1.5	5~8	10
QM40-H7-08	M40×1.5	5~8	10
QM40-H8-06	M40×1.5	4~6	10
QM40-H9-05	M40×1.5	3~5	10
QM40-H10-05	M40×1.5	3~5	10
QM50-H2-15	M50×1.5	11~15	10
QM50-H3-12	M50×1.5	9~12	10
QM63-H2-17	M63×1.5	14~17	10
QM63-H3-13	M63×1.5	9~13	10
QM63-H6-12	M63×1.5	8~12	10

防水扁孔密封圈

Waterproof flat hole sealing ring



材料：三元乙丙/尼龙

温度：-40℃~100℃

说明：用于蓝江防水接头锁紧密封扁电缆

Material: EPDM/Nylon

Temperature:- 40℃~100℃

Description: Used for locking and sealing cables of Lanjiang waterproof flat gland



产品尺寸表

蓝江产品型号	适配蓝江接头	电缆范围	包装
Product model	Adapt cable gland	Cable range	packaging
PN.	Metric	Φ mm	PCS
MG20A-0814	M20×1.5	8*14	50
MG20A-0612	M20×1.5	6*12	50
MG20A-0410	M20×1.5	4*10	50
MG20AS-0712	M20×1.5	7*12	50
MG20AS-0508	M20×1.5	5*8	50
MG25A-0511	M25×1.5	5*11	50
MG25A-0614	M25×1.5	7*14	50
MG32A-0519	M32×1.5	5*9	20
MG40A-1230	M40×1.5	12*30	10
MG50A-1334	M50×1.5	12*34	10
MG63A-1642	M63×1.5	10*42	10
MG63A-2055	M63×1.5	20*55	10

防水密封扁垫片


Waterproof sealing flat gasket



材料：三元乙丙/尼龙
温度：-40℃~100℃

Material: EPDM/Nylon
Temperature:- 40℃~100℃

产品尺寸表

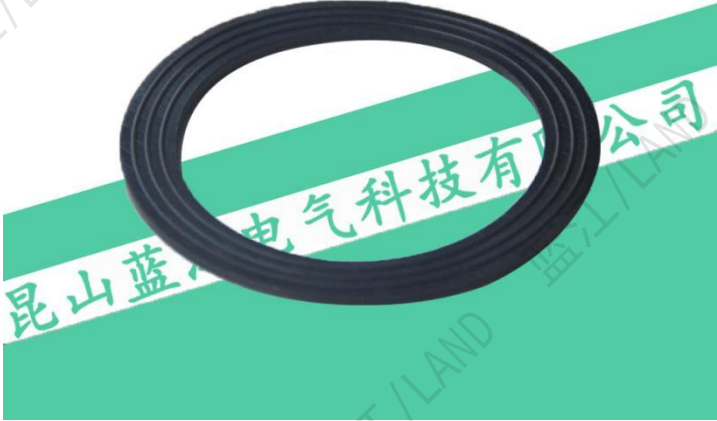

蓝江产品型号	产品尺寸/Product size		
Product model	内径	外径	厚度
PN.	Inner diameter	Outer diameter	Thickness
W-M12B	12	16	1.8
W-M16	16	20	1.5
W-M18	18	24	1.9
W-M20	20	28	1.8
W-M22	22	29	1.9
W-M25	25	34	1.9
W-M32	32	44	1.8
W-M36	36	45	2
W-M40	40	52	2
W-M50	50	64	2
W-M63	63	71	2
W-M75	75	91	2
W-M90	90	106	2
W-PG7	12.5	16	2
W-PG9	15.2	20	1.5
W-PG11	18.6	24	1.8
W-PG13.5	20.4	27	1.7
W-PG16	22.5	29	1.8
W-PG19	24	28	2
W-PG21	28.3	35	1.9
W-PG25	30	37	1.8
W-PG29	37	35	2
W-PG36	47	54	2
W-PG42	54	64	2
W-PG48	59.3	69	2

封口橡胶护套

Sealing rubber sheath

材料: PVC

温度: -20℃~80℃

说明: 包裹并保护电缆接头

Material: PVC

Temperature:- 20℃~80℃

Description: Wrap and protect cable gland



产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	总长度	接入长度	内径	厚度
PN.	L1 mm	L2 mm	Φ A mm	T mm
*PVC-Φ 20	80±2	50±2	20±2	1
PVC-Φ 24	98±2	68±2	24±2	1
PVC-Φ 27	110±2	68±2	27.5±2	1
PVC-Φ 32	110±2	70±2	32±2	1
PVC-Φ 34	130±2	68±2	34.5±2	1
*PVC-Φ 38	120±2	75±2	38±2	1.2
PVC-Φ 41	132±2	79±2	41±2	1.2
*PVC-Φ 48	135±2	88±2	48±2	1.5
PVC-Φ 50	150±2	88±2	50±2	1.2
*PVC-Φ 52	165±2	95±2	52±2	1.5
PVC-Φ 59	170±2	97±2	59±2	1.2
PVC-Φ 72	175±2	97±2	72±2	1.2
PVC-Φ 90	175±2	106±2	90±2	1.2
PVC-Φ 95	190±2	125±2	95±2	1.7
PVC-Φ 105	190±2	115±2	105±2	1.8
PVC-Φ 108	215±2	125±2	108±2	2
PVC-Φ 128	235±2	140±2	128±2	2

通孔橡胶护套

Modified rubber sheath

材料：改性橡胶


温度：-40℃~100℃

说明：包裹并保护电缆接头

Material: Modified rubber

Temperature:- 40℃~100℃

Description: Wrap and protect cable gland

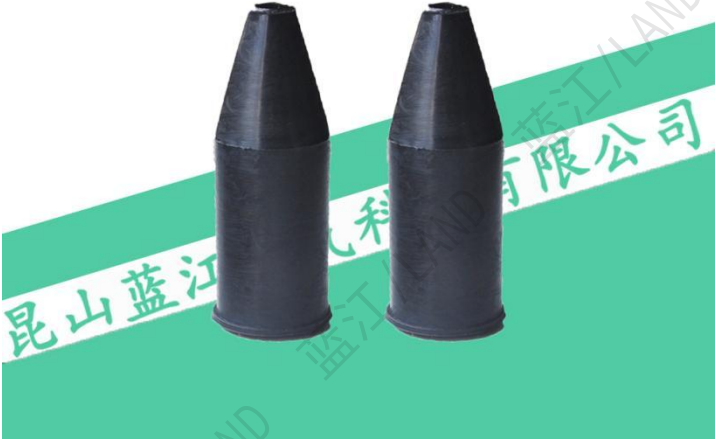

产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	总长度	接入长度	内径	厚度
PN.	L1 mm	L2 mm	Φ A mm	T mm
PVC-DN15	80±2	50±2	20±2	1
PVC-DN20	98±2	68±2	24±2	1
PVC-DN25	110±2	68±2	27.5±2	1
PVC-DN32	110±2	70±2	32±2	1
PVC-DN40	130±2	68±2	34.5±2	1
PVC-DN50	120±2	75±2	38±2	1.2

接地片

Grounding plate



材料：黄铜/黄铜镀镍


温度：-40℃~100℃

说明：用于电缆防水接头接地连接

Material: Brass/Nickel Plated Brass

Temperature:- 40℃~100℃

Description: Used for grounding connection of cable waterproof cable gland

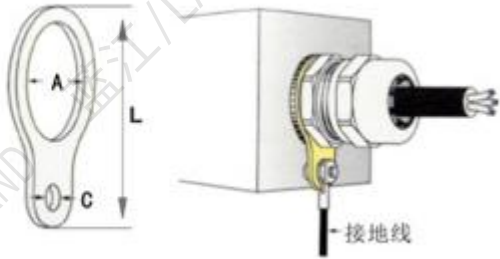

产品尺寸表

蓝江产品型号	产品尺寸/Product size			
Product model	大孔内径	小孔内径	产品长度	产品厚度
PN.	A	C	L	MM
JDP-M20	20.9	6.9	53.4	1
JDP-M25	25.9	6.9	59.4	1
JDP-M32	32.9	13	76.9	1.5
JDP-M40	40.9	14	88.6	1.5
JDP-M50	50.9	14	111	1.5
JDP-M63	63.9	14	128.4	1.5
JDP-M75	75.8	20	151.7	1.5
JDP-M90	91	20	182	1.5
JDP-M100	101.5	20	194	1.5

尼龙透气阀

Nylon breathable valve

产品名称：尼龙呼吸器/透气阀
产品材质：尼龙+硅胶+聚四氟乙烯(ePTFE)
+无纺布PET
工作温度：-40°~125°
防护等级：IP67
透气性能：≥1L/min@70mbar
耐静水压：≥100mbar for 30min
产品特性：防尘，疏水，透气，散热



Product name: LED respirator/vent valve
Product material: Nylon/stainless steel/aluminum/brass nickel plating+silica gel+expanded polytetrafluoroethylene (ePTFE)/non-woven PET
Operating temperature: - 40 °~125 °
Protection grade: IP67
Air permeability: ≥ 1L/ min@70mbar
Hydrostatic pressure resistance: ≥ 100mbar for 30min
Product characteristics: dust-proof, hydrophobic, breathable, heat dissipation

蓝江产品型号	螺纹规格	产品尺寸/Product size		
Product model	Thread size	螺纹长度	扳手尺寸	对角尺寸
B黑色/G浅灰/P深灰	M thread	Thread length	Wrench Size	Diagonal dimension
TQ-M5B G P	M5×0.8	7	11.5	12.4
TQ-M6B G P	M6×1.0	7	11.5	12.4
TQ-M8B G P	M8×1.25	10	17	18
TQ-M10B G P	M10×1.5	10	17	18
TQ-M12B G P	M12×1.5	10	17	18
TQ-M16B G P	M16×1.5	10	22	24
TQ-M20B G P	M20×1.5	10	24	26
TQ-M24B G P	M24×1.5	15	35	40
TQ-M40B G P	M40×1.5	15	56	60

铜镀镍透气阀

Nickel Plated Brass breathable valve

产品名称：铜镀镍呼吸器/透气阀

产品材质：铜镀镍+硅胶+聚四氟乙烯(ePTFE)
+无纺布PET

工作温度：-40°~125°

防护等级：IP67

透气性能：≥1L/min@70mbar

耐静水压：≥100mbar for 30min

产品特性：防尘，疏水，透气，散热



Product name: Nickel Plated Brass respirator/vent valve

Product material: Brass/stainless steel/aluminum/brass nickel plating+silica gel+expanded polytetrafluoroethylene (ePTFE)/non-woven PET

Operating temperature: - 40 °~125 °

Protection grade: IP67

Air permeability: ≥ 1L/ min@70mbar

Hydrostatic pressure resistance: ≥ 100mbar for 30min

Product characteristics: dust-proof, hydrophobic, breathable, heat dissipation

蓝江产品型号	螺纹规格	产品尺寸/Product size		
Product model	Thread size	螺纹长度	扳手尺寸	对角尺寸
PN.	M thread	Thread length	Wrench Size	Diagonal dimension
TQ-M5	M5×0.8	7	10	11
TQ-M6	M6×1.0	7	10	11
TQ-M8	M8×1.25	7	14	15.5
TQ-M10	M10×1.5	7	17	19
TQ-M12	M12×1.5	7	17	19
TQ-M16	M16×1.5	10	20	22
TQ-M20	M20×1.5	10	22	25

不锈钢透气阀

Stainless steel breathable valve

产品名称： 不锈钢呼吸器/透气阀

产品材质： 不锈钢+硅胶+聚四氟乙烯(ePTFE)
+无纺布PET

工作温度： -40°~125°

防护等级： IP67

透气性能： ≥1L/min@70mbar

耐静水压： ≥100mbar for 30min

产品特性： 防尘，疏水，透气，散热



Product name: stainless steel respirator/vent valve

Product material: stainless steel/stainless steel/aluminum/brass nickel plating+silica gel+expanded polytetrafluoroethylene (ePTFE)/non-woven PET

Operating temperature: - 40 °~125 °

Protection grade: IP67

Air permeability: ≥ 1L/ min@70mbar

Hydrostatic pressure resistance: ≥ 100mbar for 30min

Product characteristics: dust-proof, hydrophobic, breathable, heat dissipation

蓝江产品型号	螺纹规格	产品尺寸/Product size		
Product model	Thread size	螺纹长度	扳手尺寸	对角尺寸
PN.	M thread	Thread length	Wrench Size	Diagonal dimension
TQ-M5-SS	M5×0.8	7	10	11
TQ-M6-SS	M6×1.0	7	10	11
TQ-M8-SS	M8×1.25	7	14	15.5
TQ-M10-SS	M10×1.5	7	17	19
TQ-M12-SS	M12×1.5	7	17	19
TQ-M16-SS	M16×1.5	10	20	22
TQ-M20-SS	M20×1.5	10	22	25