

# 防折弯尼龙电缆防水接头

- 产品材料:** 尼龙+EPDM 橡胶
- 防护等级:** IP68
- 工作温度:** -40° ~ 105°,短时可达 120°
- 阻燃等级:** UL94V-2, 可定制 V0 级阻燃
- 产品性能:** 符合 ROHS2.0, 欧盟 CE, IP68 防护
- 订购说明:**


- 1) 标准五件套: 螺母 (NPT 无) , 密封垫片, 主体, 夹紧圈, 螺帽;
- 2) 颜色请备注, 黑色后缀加 B, 灰白色后缀加 G;
- 3) 产品价格为 (人民币: 元/套, 美元: USD/set) 。



# Stress relief nylon cable gland

- Materials:** Nylon + EPDM rubber
- Waterproof:** IP68
- Temperature:** -40° ~ 105°, Short-term 120°
- fire prevention:** UL94V-2, Customizable V0
- performance:** ROHS2 0, EU CE, IP68
- Ordering Information:**

- 1) Standard five piece set: nut (NPT NO) , sealing gasket, main body, clamping ring, nut;
- 2) Please note the color, black suffix plus B, gray suffix plus G;
- 3) The product price is (RMB: yuan/set, USD: USD/set).

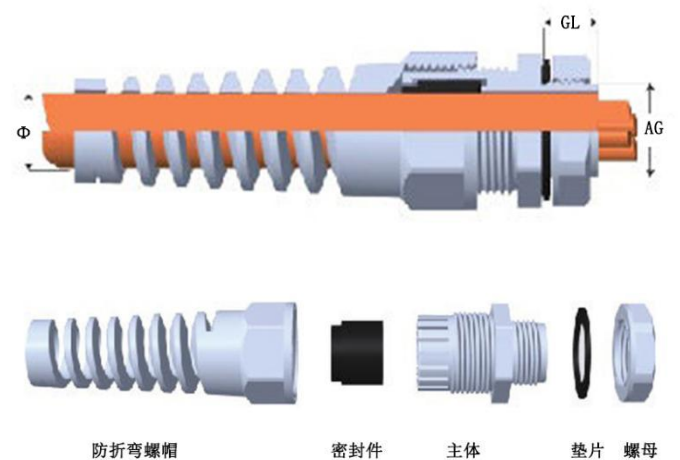

## 产品应用场合/Application occasion



## 连体 M 螺纹尺寸表/ Metric thread product size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Thread length	Wrench Size
PN.	Metric	φ mm	GL mm	nut/cap mm
MG12B-P-08	M12×1.5	4~8	8.5	18/19
MG12B-P-05	M12×1.5	3~5	8.5	18/19
MG12BL-P-08	M12×1.5	4~8	15	18/19
MG12BL-P-05	M12×1.5	3~5	15	18/19
MG12BS-P-07	M12×1.5	3~6.5	8.5	18/15
MG12BSL-P-07	M12×1.5	3~6.5	15	18/15
MG16B-P-10	M16×1.5	6~10	10	22/22
MG16B-P-07	M16×1.5	4~7	10	22/22
MG16BL-P-10	M16×1.5	6~10	15	22/22
MG16BL-P-07	M16×1.5	4~7	15	22/22
MG16BS-P-08	M16×1.5	4~8	10	22/19
MG16BS-P-05	M16×1.5	3~5	10	22/19
MG16BSL-P-08	M16×1.5	4~8	15	22/19
MG16BSL-P-05	M16×1.5	3~5	15	22/19
MG18B-P-10	M18×1.5	6~10	10	24/22
MG18B-P-07	M18×1.5	4~7	10	24/22
MG18BL-P-10	M18×1.5	6~10	15	24/22
MG18BL-P-07	M18×1.5	4~7	15	24/22
MG20B-P-14	M20×1.5	8~14	10	27/27
MG20B-P-11	M20×1.5	6~11	10	27/27
MG20B-P-07	M20×1.5	4~7	10	27/27
MG20BL-P-14	M20×1.5	8~14	15	27/27
MG20BL-P-11	M20×1.5	6~11	15	27/27
MG20BL-P-07	M20×1.5	4~7	15	27/27
MG20BS-P-12	M20×1.5	6~12	10	27/24
MG20BS-P-09	M20×1.5	5~9	10	27/24

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Thread length	Wrench Size
PN.	Metric	φ mm	GL mm	nut/cap mm
MG20BSL-P-12	M20×1.5	6~12	15	27/24
MG20BSL-P-09	M20×1.5	5~9	15	27/24
MG20BM-P-10	M20×1.5	6~10	10	27/22
MG20BM-P-07	M20×1.5	4~7	10	27/22
MG22B-P-14	M22×1.5	8~14	10	29/27
MG22B-P-11	M22×1.5	6~11	10	29/27
MG25B-P-18	M25×1.5	13~18	12	33/33
MG25B-P-13	M25×1.5	7~13	12	33/33
MG25B-P-08	M25×1.5	4~8	12	33/33
MG25BL-P-18	M25×1.5	13~18	15	33/33
MG25BL-P-13	M25×1.5	7~13	15	33/33
MG25BL-P-08	M25×1.5	4~8	15	33/33
MG25BS-P-14	M25×1.5	8~14	12	33/27
MG25BS-P-10	M25×1.5	6~10	12	33/27
MG25BS-P-07	M25×1.5	4~7	12	33/27
MG32B-P-25	M32×1.5	18~25	15	41/41
MG32B-P-22	M32×1.5	16~22	15	41/41
MG32B-P-18	M32×1.5	13~18	15	41/41
MG32B-P-12	M32×1.5	8~12	15	41/41
MG32BS-P-18	M32×1.5	13~18	15	41/33
MG32BS-P-13	M32×1.5	7~13	15	41/33
MG32BS-P-08	M32×1.5	4~8	15	41/33
MG36B-P-25	M36×1.5	18~25	12	45/41
MG40BS-P-25	M40×1.5	18~25	20	50/41
MG40BS-P-18	M40×1.5	13~18	20	50/41

## 连体 PG 螺纹尺寸表/ PG thread product size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Thread length	Wrench Size
PN.	Metric	φ mm	GL mm	nut/cap mm
PG7B-P-08	PG7	4~8	8.5	17/19
PG7B-P-05	PG7	3~5	8.5	17/19
PG7BL-P-08	PG7	4~8	15	17/19
PG7BL-P-05	PG7	3~5	15	17/19
PG7BS-P-07	PG7	3~6.5	8.5	17/15
PG7BSL-P-07	PG7	3~6.5	15	17/15
PG9B-P-08	PG9	4~8	8.5	22/19
PG9B-P-05	PG9	3~5	8.5	22/19
PG9BL-P-08	PG9	4~8	15	22/19
PG9BL-P-05	PG9	3~5	15	22/19
PG11B-P-10	PG11	6~10	10	22/22
PG11B-P-07	PG11	4~7	10	22/22
PG11BL-P-10	PG11	6~10	15	22/22
PG11BL-P-07	PG11	4~7	15	22/22
PG13.5B-P-12	PG13.5	6~12	10	27/24
PG13.5B-P-09	PG13.5	5~9	10	27/24
PG13.5BL-P-12	PG13.5	6~12	15	27/24
PG13.5BL-P-09	PG13.5	5~9	15	27/24
PG16B-P-14	PG16	8~14	11	30/27
PG16BL-P-14	PG16	8~14	15	30/27
PG19B-P-14	PG19	8~14	11	30/27
PG21B-P-18	PG21	13~18	12	36/33
PG21B-P-13	PG21	8~13	12	36/33
PG21B-P-08	PG21	4~8	12	36/33
PG21BL-P-18	PG21	13~18	15	36/33
PG29B-P-25	PG29	18~25	12	46/41

## 英制 G 和美制 NPT 尺寸表/G and NPT thread product size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Thread length	Wrench Size
PN.	Metric	φ mm	GL mm	nut/cap mm
G1/4B-P-08	G1/4	4~8	8.5	19/19
G1/4B-P-05	G1/4	3~5	8.5	19/19
G3/8B-P-10	G3/8	6~10	10	22/22
G3/8B-P-07	G3/8	4~7	10	22/22
G1/2B-P-12	G1/2	6~12	10	27/24
G1/2B-P-09	G1/2	5~9	10	27/24
G3/4B-P-18	G3/4	13~18	12	33/33
G3/4B-P-13	G3/4	7~13	12	33/33
G3/4B-P-08	G3/4	4~8	12	33/33
G1B-P-25	G1	18~25	13.5	42/41
NPT3/8B-P-10	NPT3/8	6~10	10	22
NPT3/8B-P-07	NPT3/8	4~7	10	22
NPT1/2B-P-12	NPT1/2	6~12	10	27
NPT1/2B-P-09	NPT1/2	5~9	10	27
NPT3/4B-P-18	NPT3/4	13~18	15	33
NPT3/4B-P-13	NPT3/4	7~13	15	33
NPT3/4B-P-08	NPT3/4	4~8	15	33
NPT1B-P-25	NPT1	18~25	17	41

## 分体式结构尺寸表/Separated product size

蓝江产品型号	螺纹规格	电缆范围	螺纹长度	扳手尺寸
Product model	Thread size	Cable range	Thread length	Wrench Size
PN.	Metric	φ mm	GL mm	nut/cap mm
MG12A-P-08	M12×1.5	4~8	8.5	18/19
MG12A-P-05	M12×1.5	3~5	8.5	18/19
MG16A-P-10	M16×1.5	6~10	15	22/22
MG16A-P-07	M16×1.5	4~7	15	22/22
MG20A-P-14	M20×1.5	8~14	15	27/27
MG20AS-P-12	M20×1.5	6~12	10	27/24
MG20AS-P-09	M20×1.5	5~9	10	27/24
MG22A-P-14	M22×1.5	8~14	10	29/27
MG25A-P-18	M25×1.5	13~18	15	33/33
MG25A-P-16	M25×1.5	10~16	15	33/33
MG32A-P-25	M32×1.5	18~25	15	41/41
MG32A-P-22	M32×1.5	16~22	15	41/41
PG7A-P-08	PG7	4~8	8.5	17/19
PG9A-P-08	PG9	4~8	8.5	22/19
PG11A-P-10	PG11	6~10	10	22/22
PG13.5A-P-12	PG13.5	6~12	10	27/24
PG13.5A-P-09	PG13.5	5~9	10	27/24
PG16A-P-14	PG16	8~14	11	30/27
PG21A-P-18	PG21	13~18	12	36/33
PG29A-P-25	PG29	18~25	12	46/41
G1/4A-P-08	G1/4	4~8	8.5	19/19
G3/8A-P-10	G3/8	6~10	15	22/22
G3/8A-P-07	G3/8	4~7	15	22/22
G1/2A-P-12	G1/2	6~12	10	27/24
G3/4A-P-18	G3/4	13~18	15	33/33